

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0191930283
Status: Active
Description: VersaKrimp™ Ring Tongue Terminal for 4 AWG Wire

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR18689
UL E32244

General

Product Family Ring and Spade Terminals
Series 19193
Crimp Quality Equipment Yes
Mil-Spec N/A
Product Name VersaKrimp™
Type Ring

Physical

Barrel Type Closed - Brazed
Insulation None
Material - Plating Mating Tin
Packaging Type Bag
Plating min: Mating (µin) 100
Plating min: Mating (µm) 2.5
Plating min: Termination (µin) 100
Plating min: Termination (µm) 2.5
Stud Size 3/8" (M9)
Termination Interface: Style Crimp or Compression
Wire Size AWG 4

Material Info

Old Part Number F-369-38

Reference - Drawing Numbers

Sales Drawing SD-19193-006




image - Reference only

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[19193Series](#)

Application Tooling | FAQ
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global	
Description	Product #
Putt Pump Dieless Head System	0192860065
Manual Putt Pump Hydraulic System, Die set required	0192860117
Die Set (large) for the HHLS Hydralic Crimper	0192900007
Hand Crimp Tool	0640013900

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

SD006

Doc. # SD-19193-006


Customer Dwg:

MATERIAL: Copper
 PLATING: Electro-Tin
 STUD SIZE: "D" $\pm .005$

10 - .198
 14 - .265
 56 - .328
 38 - .390
 76 - .453
 12 - .515
 58 - .656
 34 - .781
 209 = .209
 413 = .413

VERSAKRIMP

BRAZE SEAM

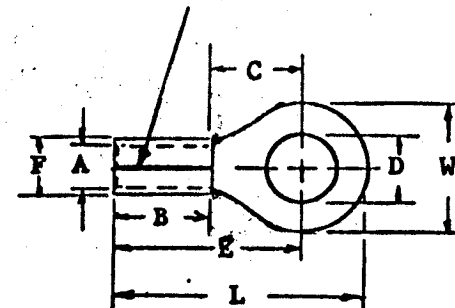

Customer Dimensions

Part No.	Wire Size	"W"	"C" Min	"E" Max	"B" Min	"L" Max	"A" Min	Stock Thkns. (A)	"F" Max	AVAILABLE STUD SIZE
F-366-	#4	$\frac{.652}{.678}$	.520	1.028	.425	1.385	.280	REF. .075	.470	209, 413 10, 14, 56, 38, 76, 12,
F-367-	#4	$\frac{.465}{.485}$	.520	1.028	.425	1.288	.280	REF. .075	.470	10, 14, 56
F-369-	#4	$\frac{.875}{.895}$	.989	1.497	.425	1.970	.280	REF. .075	.470	14, 56, 38, 76, 12, 58
F-370-	#4	$\frac{1.250}{1.270}$	.989	1.497	.425	2.158	.280	REF. .075	.470	14, 56, 38, 76, 12, 58, 34

For parts to be on tape add "T" at end of part number.

ETC molex
 INCORPORATED

TITLE:

"F" RING TONGUE
 TERMINAL

DIMENSIONAL TOLERANCE
 UNLESS OTHERWISE SPECIFIED

FRAC.

DEC.

ANG.

 $\pm$ $\pm$ $\pm$

REVISION

SCALE: NONE

DATE

DRWN. BY: LEM

3/2/70

CHKD. BY:

APPRD. BY:

DRAWING NO.:

A ETC 30245
11/7 RGM