Type: S-10K, S-10KN

◆ Product Description

- 10.8×10.8mm Max.(L×W), 13.0mm Max. Height. (S-10K)
- 10.3×10.3mm Max.(L×W), 12.5mm Max. Height. (S-10KN)
- Inductance:30μH Max.
- Operating frequency: 300MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements..


◆ Feature

- Variable type.
- Both shielded(S-10K) and unshielded(S-10KN) types are available.
- RoHS Compliance


◆ Dimensions (mm)



S-10K

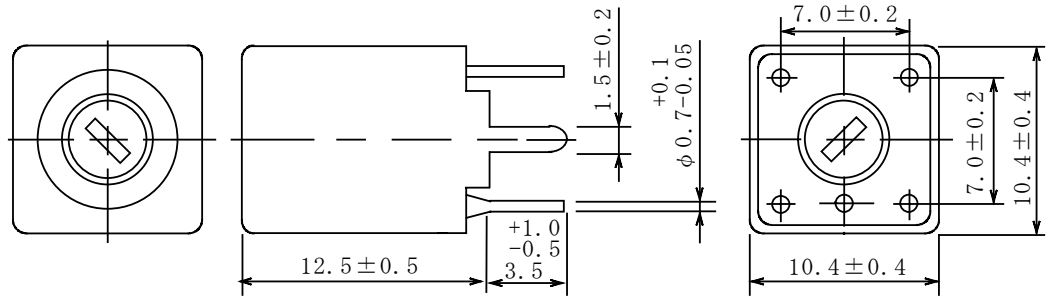

S-10KN

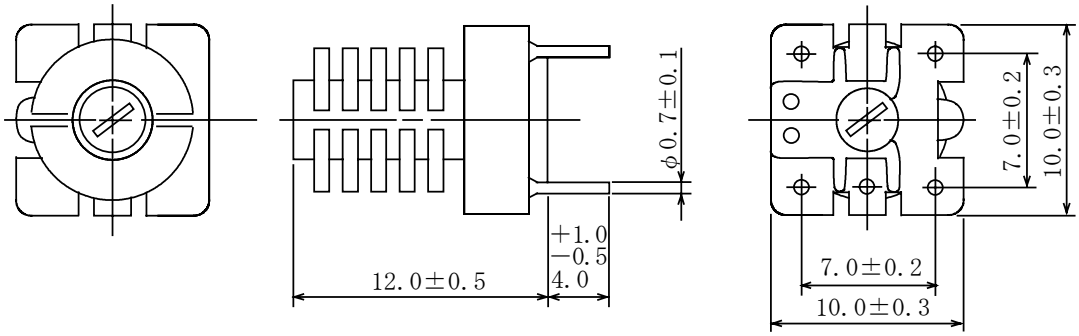


＊ Dimension does not include solder used on coil.

＊ Pin pitch should be measured at the root of terminal.

＊ Dimensions without tolerance are approx.

Type: S-10K, S-10KN

◆ Connection (Bottom View)

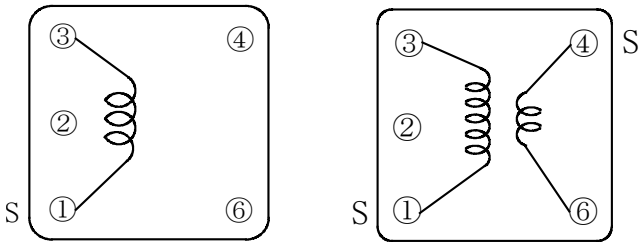

S-10K　　S-10KN

"S" is winding start.

◆ Specification (S-10K) (Part No. 2236-T058)

Item	(1－3)	Measuring Conditions
Tuning capacity	46.0pF±2%　Variable	75.0MHz
Unloaded Qu	45　Min.	75.0MHz
Inductance	0.08μH (Ref.)	75.0MHz

◆ Specification(S-10KN) (Part No.S1075216)

Item	(1－3)	Measuring Condition
Inductance	17μH±5%　Variable	2.52MHz
Unloaded Qu	35　Min.	2.52MHz