


Datamate Connectors

Male Horizontal PC Tail

- ❖ Mates with female connectors on pages 18 to 20.
- ❖ For British Standard versions see pages 14 to 15.
- ❖ Supplied with strain relief straps: **Order code M80-0030006.**

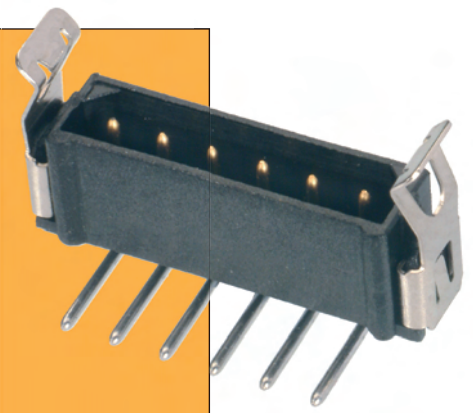

SINGLE ROW	CALCULATION	DOUBLE ROW	CALCULATION
	A B + 5.60		A B + 5.60
	B (Total No. of contacts - 1) x 2		B Total No. of contacts - 2
<p>Friction lock or latch (when fitted) adds 0.5mm to overall length 'A'</p> <p>Recommended PC Board Pattern</p>		<p>Friction lock or latch (when fitted) adds 0.5mm to overall length 'A'</p> <p>Recommended PC Board Pattern</p>	
<p>View of strap in place</p>			

HOW TO ORDER

M80 - XXX XX XX

SERIES CODE

RoHS		Non-RoHS		
Single	Double	Single	Double	
843	841	878	868	Unlatched (3mm tail)
842	851	876	866	Latched (3mm tail)
846	839	804	814	Friction latched (3mm tail)
793	791	793	791	Unlatched (4.5mm tail)
792	771	792	771	Latched (4.5mm tail)
796	789	796	789	Friction latch (4.5mm tail)

FINISH

05	Gold	
22	Gold + Tin/Lead	
42	Gold + Tin	
45	Gold	

TOTAL NO. OF CONTACTS

Single Row	02 to 07, 17, 22
Double Row	04, 06, 08, 10, 12, 14, 16, 18, 20, 26, 34, 44

Strain relief straps are supplied with all horizontal pc tail connectors. There is no need to order separately. Straps are located at the end of each connector.

All dimensions in mm.

www.harwin.com

