



Features

- ✧ For IF SAW filter
- ✧ High attenuation
- ✧ Single-ended operation
- ✧ Dual In-line Package
- ✧ RoHS compliant (2002/95/EC), Pb-free

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	190.85	191	191.15
Insertion Loss	dB	-	28.4	30
1 dB Bandwidth	MHz	16.3	16.43	-
3 dB Bandwidth	MHz	-	16.72	-
50 dB Bandwidth	MHz	-	17.8	18
Passband Variation	dB	-	0.8	1
Absolute Delay	usec	-	3.39	-
Ultimate Rejection	dB	50	52	-
Material Temperature coefficient	KHz/°C	-3.44		
Substrate Material	-	112LT		
Ambient Temperature	°C	25		
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-45	-	+105
DC Voltage	V	0		
Input Power	dBm	-	-	10
ESD Class	-	1A		
Package Size	DIP3512 (35.0x12.8x4.7mm3)			

Notes:


- All specifications are based on the test circuit shown;
- In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
- Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
- This is the optimum impedance in order to achieve the performance show.



SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBT19101		
Rev. Date	2008-04-22		
Ver.	1.0	Page	1/3

Matching Configuration

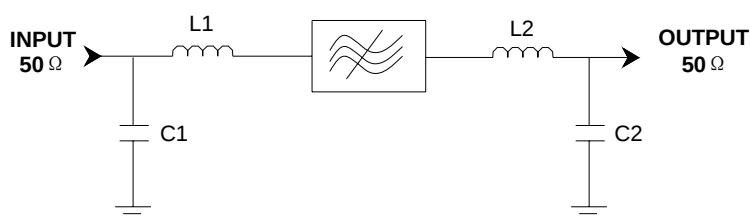


L1 = 27nH L2 = 22nH

C1 = C2 = 27pF

Source / Load Impedance = 50 ohm

Notes - Component values may change depending
on board layout.

Package Dimension

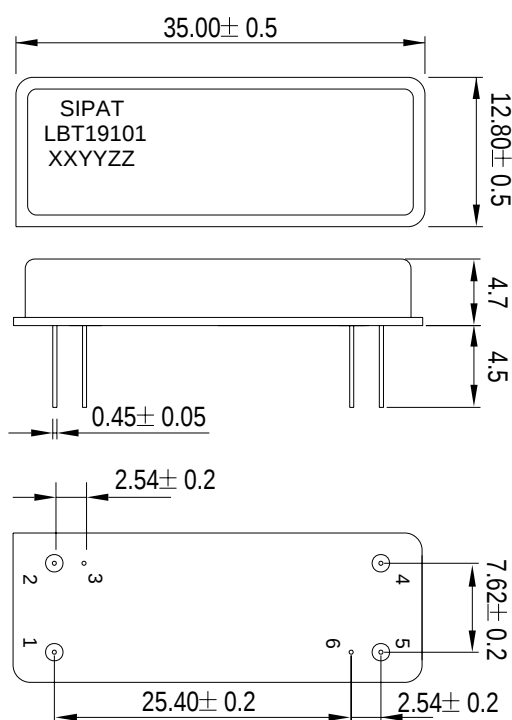

Pad Configuration:

Input 1
Output 5
Ground All Others

Marking Configuration:

1) SIPAT: Manufacturer Name
2) LBT19101: Part Number
3) XXYYZZ: Date Code

Package: DIP3512

Unit: mm




SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBT19101	
Rev. Date	2008-04-22	
Ver.	1.0	Page 2/3



Typical Performance


Frequency Respond

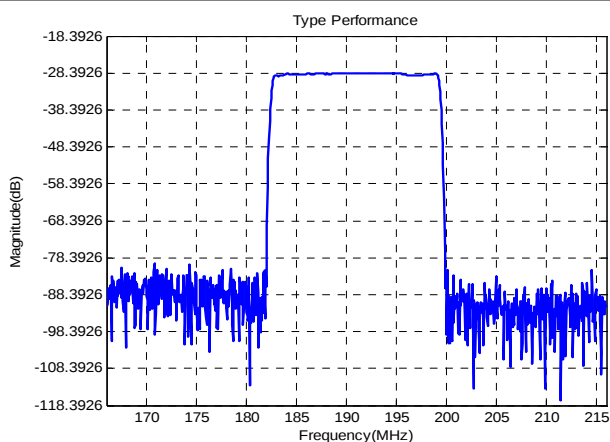

Horizontal: 5MHz/Div

Vertical: 10dB/Div


Passband Respond

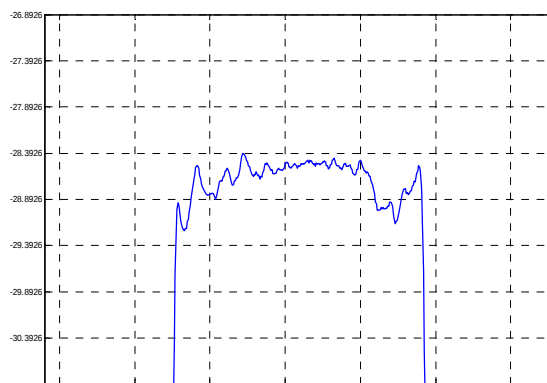

Horizontal: 5MHz/Div

Vertical: 0.5dB/Div


Group Delay Variation($f_0 \pm 8\text{MHz}$)

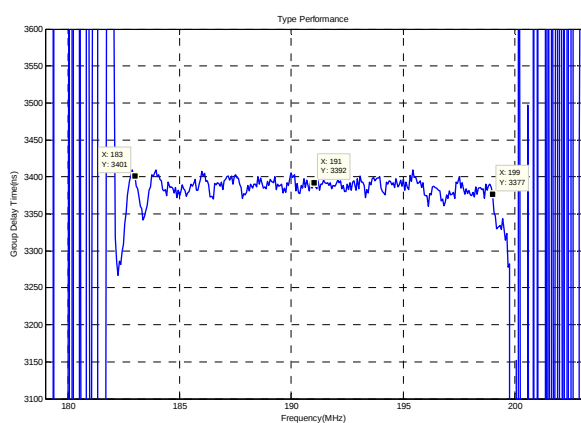

Horizontal: 5MHz/Div

Vertical: 50ns/Div


Phase Linearity($f_0 \pm 8\text{MHz}$)

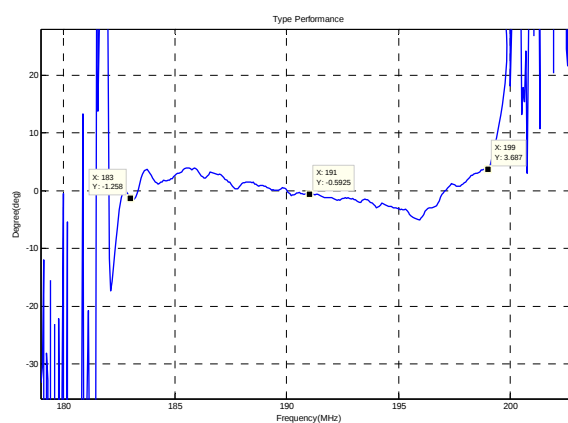


Horizontal: 5MHz/Div

Vertical: 10deg/Div

Smith Chart S11

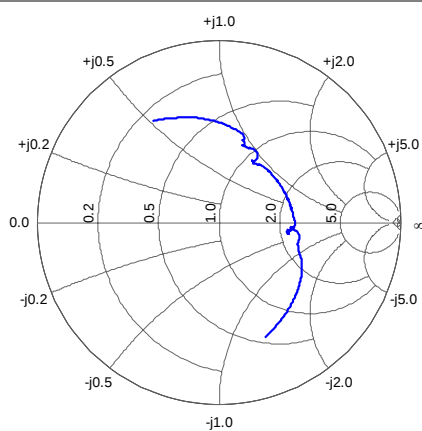

Smith Chart S22

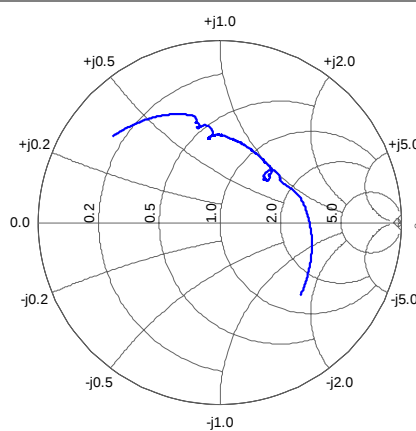

SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number

LBT19101

Rev. Date

2008-04-22

Ver.

1.0

Page 3/3