

Fiber optic coupling - PSM-SET-BFOC-LINK/2 - 2799429

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Coupling; set consisting of 2 couplings for connecting B-FOC plugs



Your advantages

✓ Suitable for fiber types:

- POF (980/1000 µm)
- PCF (200/230 µm)
- GOF MM (50/125µm)
- GOF SM (9/125µm)

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 118389
GTIN	4017918118389

Technical data

Mechanical characteristics

Connection profile	B-FOC (ST®)
Ferrule diameter	2.50 mm
Connection method	Coupling
Color	Bare metallic
Degree of protection	IP20

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Degree of protection	IP20

Material data

Flammability rating according to UL 94	V0
Material	Zinc die-cast
Depth	29.4 mm


Fiber optic coupling - PSM-SET-BFOC-LINK/2 - 2799429

Technical data


Standards and Regulations

Flammability rating according to UL 94	V0
Environmental Product Compliance	
China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

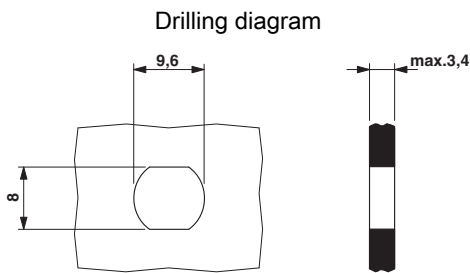

Drilling diagram B-FOC panel feed-through

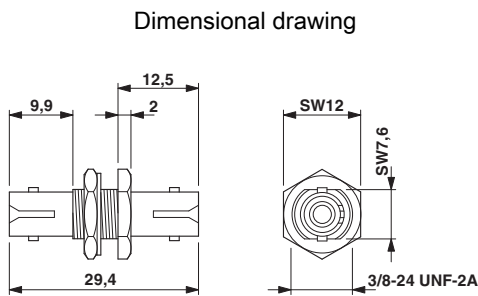

Dimensional drawing B-FOC coupling

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.01742
-----	--	---------

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>