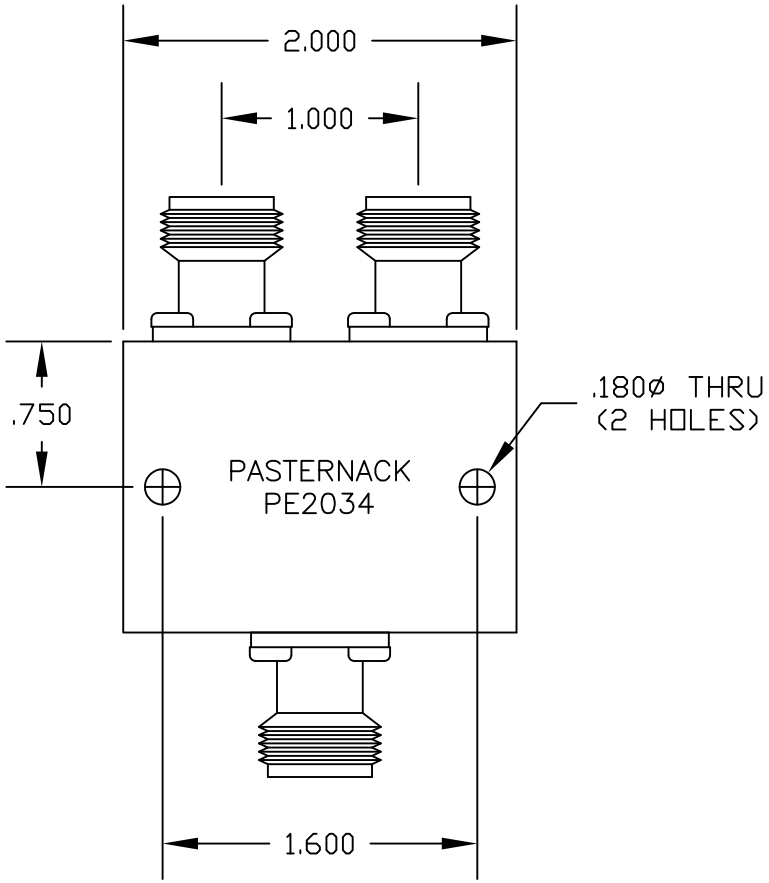

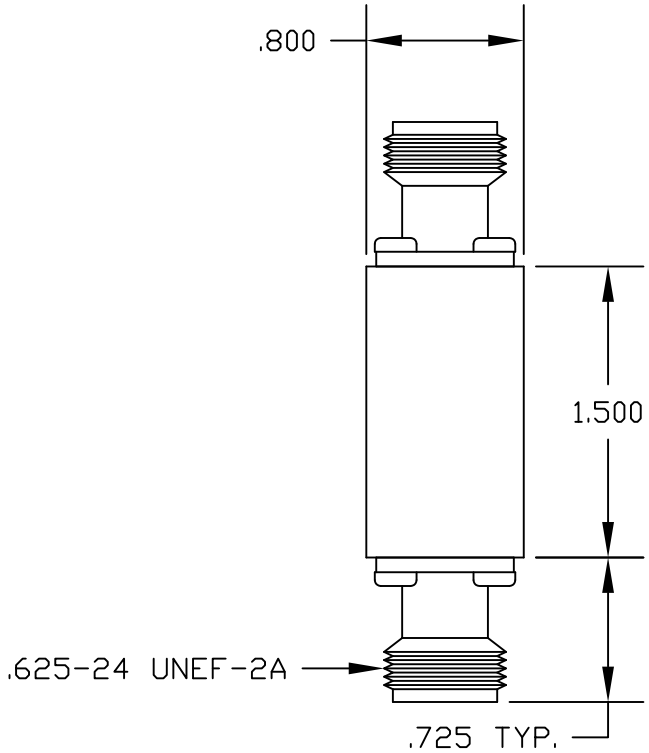

SPECIFICATIONS

FREQUENCY RANGE: 2 TO 4 GHz
NUMBER OF OUTPUT PORTS: 2
MINIMUM ISOLATION: 18 dB
MAXIMUM VSWR: 1.45
MAXIMUM INSERTION LOSS: .40 dB

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

COAXIAL & FIBER OPTICS

DWG TITLE	DES.
PE2034	N FEMALE POWER DIVIDER, FREQUENCY RANGE: 2-4 GHz 2 OUTPUT PORTS

SIZE A	FSCM NO. 53919	CAD FILE 032202	SCALE N/A		127

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.