

## Single Phase 2.0 AMPS. Silicon Bridge Rectifiers

**Voltage Range**  
50 to 1000 Volts  
**Current**  
2.0 Amperes


### Features

- UL Recognized File # E-230084
- Ideal for printed circuit board
- Reliable low cost construction technique results in inexpensive product
- High temperature soldering guaranteed:  
250°C / 10 seconds / 0.375" ( 9.5mm )  
lead length at 5 lbs., ( 2.3 kg ) tension

### Mechanical Data

- Case: Molded plastic
- Lead: solder plated
- Polarity: As marked

## KBP

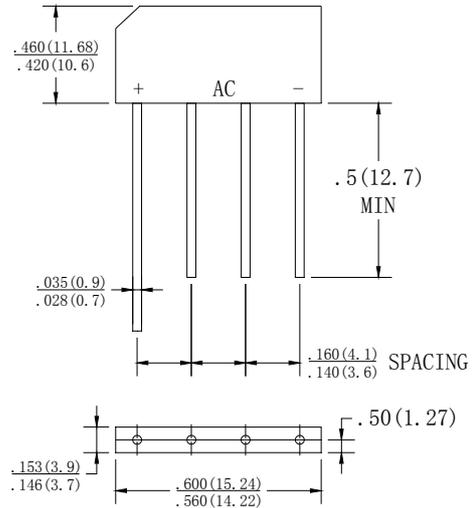

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%


Type Number		KBP 2005	KBP 201	KBP 202	KBP 204	KBP 206	KBP 208	KBP 210	UNITS
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @T <sub>A</sub> = 50°C	I(AV)	2.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I <sub>FSM</sub>	60							A
Maximum Instantaneous Forward Voltage @ 3.14A	V <sub>F</sub>	1.2							V
Maximum DC Reverse Current @ T <sub>A</sub> =25°C rated DC blocking voltage per leg T <sub>A</sub> = 125°C	I <sub>R</sub>	10 500							μ A
Typical Thermal Resistance (Note)	R θ <sub>JA</sub> R θ <sub>JL</sub>	25 8.0							°C/W
Operating Temperature Range	T <sub>J</sub>	-55 to +150							°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150							°C

**NOTE:** Thermal Resistance from Junction to Ambient and from Junction to Lead Mounted on P.C.B. with 0.47×0.47" (12×12mm)


Copper Pads

# RATING AND CHARACTERISTIC CURVES KBP2005 THRU KBP210


**FIG.1-MAXIMUM NONO-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT**

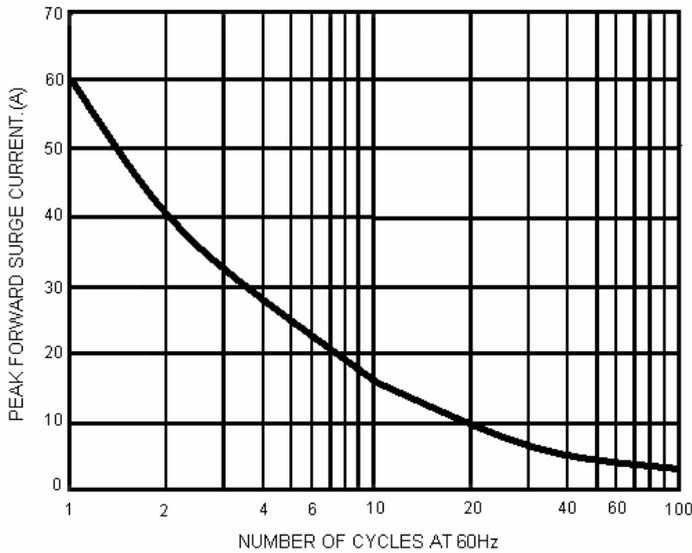

**FIG.2-MAXIMUM FORWARD CURRENT DERATING CURVE**

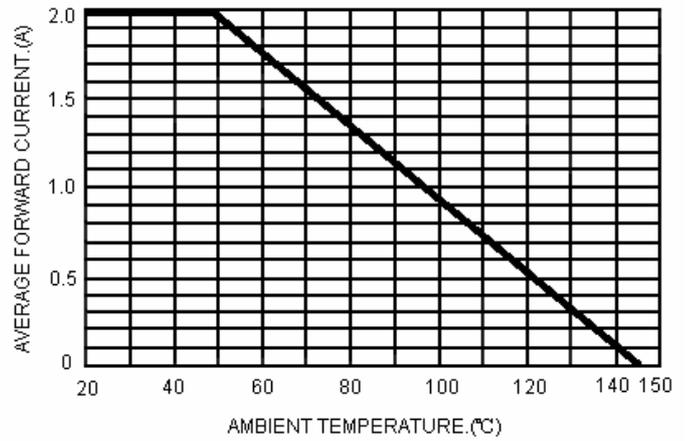

**FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT**

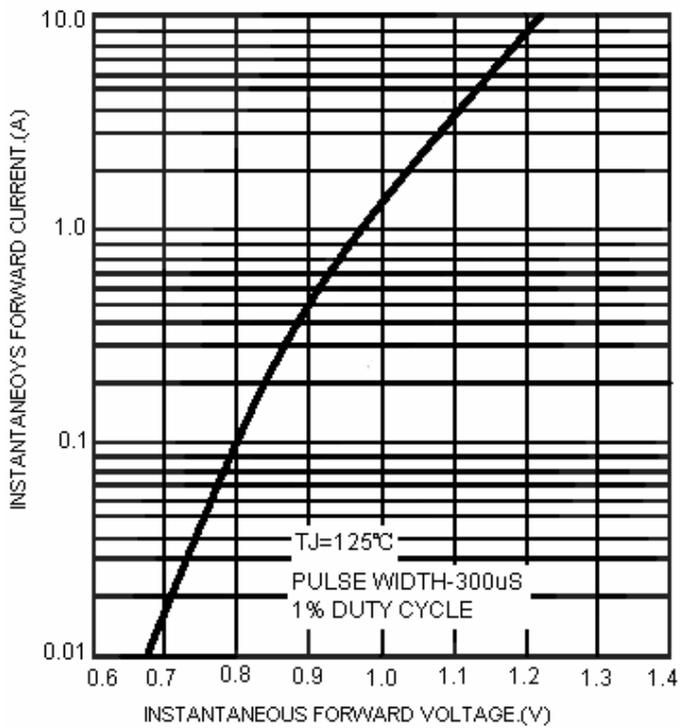

**FIG.4-TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT**

