
# PCI-1747U

## 250 kS/s, 16-bit, 64-ch Analog Input Universal PCI Card

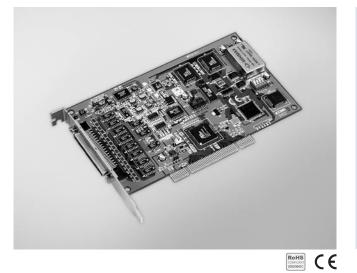

#### **Features**

- 64-ch single-ended or 32-ch differential or a combination of analog input
- 16-bit A/D converter, with up to 250 kHz sampling rate
- Auto calibration
- Onboard FIFO memory (1,024 samples)
- PCI-Bus mastering data transfer
- Universal PCI Bus (support 3.3 V or 5 V PCI bus signal)
- BoardID<sup>™</sup> switch

# Introduction

PCI-1747U is a high-resolution, high-channel-count analog input card for the PCI bus. Its sampling rate is up to 250 kS/s and 16-bit resolution provides the resolution needed for most data acquisition applications. PCI-1747U provides 64 single-ended, 32 differential analog input channels or a combination of these. It also has built in a 1,024 FIFO buffer for analog input data.

# **Specifications**

#### **Analog Input**

- Channels
- **Resolution** 16 bits
- Max. Sampling Rate 250 kS/s
- FIFO Size
- Overvoltage Protection 20 Vp-p
- Input Impedance 100 MΩ/10 pF (Off); 100 MΩ/100 pF (On)

1.024 samples

- Sampling Modes
   Software and onboard programmable pacer
- Input Range
   (V, software programmable)

Unipolar	N/A	0~10	0~5	0~2.5	0 ~ 1.25
Bipolar	±10	±5	±2.5	±1.25	±0.625
Accuracy (% of FSR ±1LSB)	0.03	0.02	0.02	0.03	0.04

64 single-ended, 32 differential, or combination

5 ~ 95% RH, non-condensing (refer to IEC 68-2-3)

#### General

<ul> <li>Bus Type</li> </ul>	Universal PCI V2.2			
<ul> <li>I/O Connector</li> </ul>	1 x 68-pin SCSI female connector			
<ul> <li>Dimensions</li> </ul>	175 x 100 mm (6.9" x 3.9")			

- Power Consumption Typical: +5 V @ 850 mA, +12 V @ 600 mA Max: +5 V @ 1 A, +12 V @ 700 m A
- Operating Temperature  $0 \sim 60^{\circ}$  C (32 ~ 140° F) (refer to IEC 68-2-1, 2)

CE

- Storage Temperature  $-20 \sim 70^{\circ} \text{ C} (-4 \sim 158^{\circ} \text{ F})$
- Storage Humidity
- Certifications

# **Ordering Information**

- PCI-1747U
- 250 kS/s, 16-bit, 64-ch Al Universal PCI Card
- ADAM-3968 68-pin DIN-rail SCSI Wiring Board
- PCL-10168-1 68
- PCL-10168-2
- 68-pin SCSI Shielded Cable, 1 m 68-pin SCSI Shielded Cable, 2 m

### **Pin Assignments**

			1
AIO	68	34	AI1
AI2	67	33	AI3
AI4	66	32	AI5
AI6	65	31	AI7
8IA	б4	30	AI9
AI10	63	29	AI11
AI12	62	2B	AI13
AL14	61	27	AL15
AGND	60	26	AGND
AIl6	59	25	AI17
AI18	58	24	AI19
AI20	57	23	AI21
AI22	56	22	AI23
AI24	55	21	AI25
AI26	54	20	AI27
AI28	53	19	AI29
AI30	52	18	AI31
AT32	า1	17	AT33
AT34	50	16	AT35
AT36	49	15	AT37
AI38	48	14	AI39
AI40	47	13	AI41
AI42	46	12	AI/13
AI11	-15	11	AI15
AI46	44	10	AI47
AGND	43	9	AGND
AI48	42	8	AI49
AISO	41	7	AIS1
AI52	40	б	AI33
AI54	39	1	AI35
AL56	38	4	A157
BCTU R	37	3	A128
A160	36	2	A161
AI62	35	1	AI63
	1		