

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0740622594](#)
Status: **Active**
Overview: [vhdm](#)
Description: 2.00mm (.079") Pitch VHDM® Board-to-Board Backplane Header, Vertical, 8-Row, Guide Pin Signal Module, Shield End Version, Pin End Version, 200 Circuits, Pin Length 5.15mm (.203"), Keying Pin Orientation 9

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980

General

Product Family Backplane Connectors
Series [74062](#)
Application Backplane
Application Tooling Documents Tooling Manual
Component Type PCB Header
Overview [vhdm](#)
Product Name VHDM®
Style N/A

Physical

Circuits (Loaded) 200
Circuits (maximum) 200
Color - Resin Black
Durability (mating cycles max) 200
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part Yes
Keying to Mating Part Yes
Material - Metal Beryllium Copper, High Performance Alloy (HPA), Stainless Steel
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Number of Columns N/A
Number of Pairs Open Pin Field
Number of Rows 8
Orientation Vertical
PC Tail Length (in) 0.098 In
PC Tail Length (mm) 2.50 mm
PCB Locator No
PCB Retention None
PCB Thickness Recommended (in) 0.070 In
PCB Thickness Recommended (mm) 1.80 mm
Packaging Type Tube
Pitch - Mating Interface (in) 0.079 In
Pitch - Mating Interface (mm) 2.00 mm
Pitch - Term. Interface (in) 0.079 In
Pitch - Term. Interface (mm) 2.00 mm
Plating min: Mating (µin) 30
Plating min: Mating (µm) 0.75
Plating min: Termination (µin) 30



Series

image - Reference only

EU RoHS

RoHS Compliant by Exemption

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[74062Series](#)

Mates With

[74040 VHDM® Board-to-Board Daughtercard Receptacle](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.






Global

Description	Product #
VHDM® Signal Pin	0622015700
Insert Repair Tool	
VHDM® 8 Row Pin	0622015900
and Shield Repair Tool	
VHDM® 8 Row	0622016100
Shield Extraction Tool	

Plating min: Termination (µm)	0.75	VHDM® Insertion	<u>0622020210</u>
Polarized to PCB	Yes	Module for Standard	
Stackable	No	Shield Signal	
Surface Mount Compatible (SMC)	Yes	Header, 8 Row by	
Temperature Range - Operating	-55°C to +105°C	25 Wide, 50.00mm	
Termination Interface: Style	Through Hole - Compliant Pin	(1.97")	
Electrical			
Current - Maximum per Contact	1A		
Data Rate	3.125 Gbps		
Real Signals (per 25mm)	100		
Shield Type	Ground Plane Shield		
Shielded	Yes		
Voltage - Maximum	120V AC (RMS)/DC		
Material Info			
Reference - Drawing Numbers			
Sales Drawing	SD-74062-002		
VHDM and Very High Density Metric are trademarks of Amphenol Corporation			

This document was generated on 05/19/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

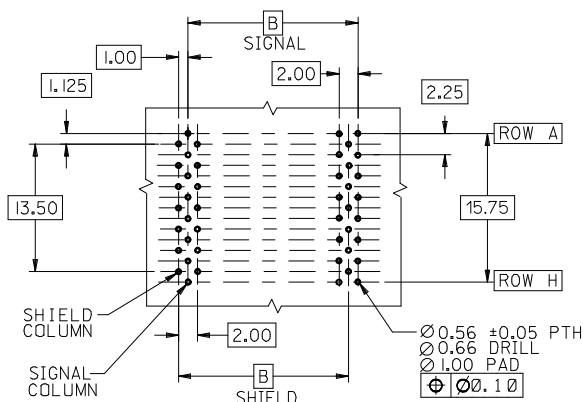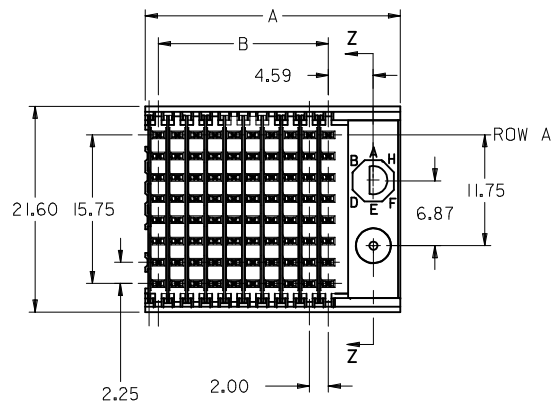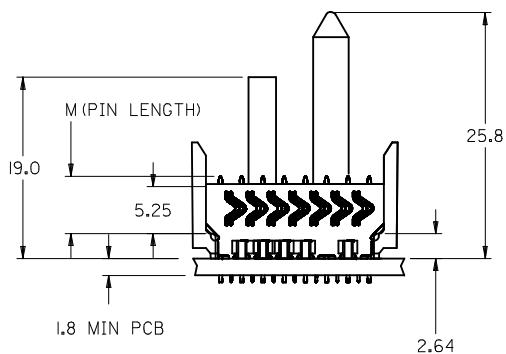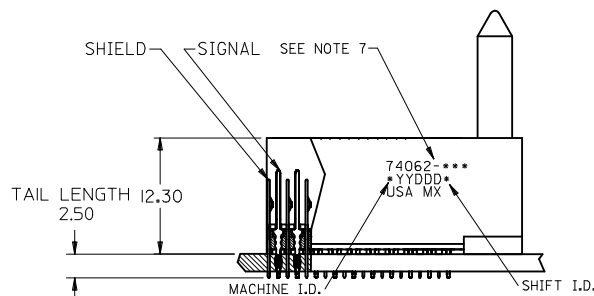

NOTES:

1. MATERIALS:
HOUSING - LIQUID CRYSTAL POLYMER (LCP),
GLASS-FILLED, UL 94V-0, COLOR: BLACK
SIGNAL PIN & SHIELD - COPPER ALLOY
2. FINISHES:
CONTACT AREA: SELECTIVE GOLD (Au)
PCB TAILS: SELECTIVE TIN/LEAD (Sn/Pb)
OR SELECTIVE MATTE TIN (Sn)
NICKEL (Ni) OVERALL.
3. THIS PART CONFORMS TO MOLEX PRODUCT
SPECIFICATION PS-74031-999
4. FOR MIXED CONTACT LENGTHS CONSULT
MOLEX FOR AVAILABILITY
5. FOR SPECIFIC MATERIAL NUMBERS & MATING
INFORMATION REFER TO SHEET 2
6. PACKAGE PER PK-74061-003
7. EITHER MARK PART WITH PART NUMBER & DATE
CODE APPROXIMATELY WHERE SHOWN OR PLACE
LABEL ON THE TUBE.

<div>ADD NO GDE/NO KEY</div> <div>EC NO: UCP2009-2089</div> <div>DRWN:BSMART 2009/02/23</div> <div>CHKD:SDANIELLEY 2009/02/23</div> <div>APPR:SMILLER 2009/02/23</div>	<div>QUALITY SYMBOLS</div> <div>▽=0</div> <div>▽=0</div>	<div>DESCRIPTION</div>	<div>REV</div>	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	<div>THIRD ANGLE PROJECTION</div>
						MM ONLY			METRIC	
						DRAWN BY DATE		TITLE		
				mm INCH		MWANG 1998/11/12		VHDM 8 ROW		
				4 PLACES ± --- ± ---		CHECKED BY DATE		SHIELD END BACKPLANE		
				3 PLACES ± --- ± ---		JLAURX 1998/11/12		SALES ASSEMBLY		
				2 PLACES ± --- ± ---		APPROVED BY DATE		MOLEX MOLEX INCORPORATED		
				1 PLACE ± --- ± ---		CB1XLER 1998/11/12		MOLEX MOLEX INCORPORATED		
				ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.		
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 2		SD-74062-002		
		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
				SHEET NO.						
				1 OF 2						


M/N 74062-()	---0*	---1*	---2*	---3*	---4*	---5*	---6*	---7*	---8*	---9*
KEYING PIN ORIENTATION										

74062 - * * *

NUMBER OF COLUMNS/PLATING
10 = 10 COLUMN TIN/LEAD
25 = 25 COLUMN TIN/LEAD
90 = 10 COLUMN MATTE TIN
85 = 25 COLUMN MATTE TIN

CONTACT LOAD
(PIN LENGTH)
1 & 6 = 4.75
2 & 7 = 6.25
3 & 8 = 4.25
4 & 9 = 5.15

NO GUIDE PIN
NO KEYING PIN

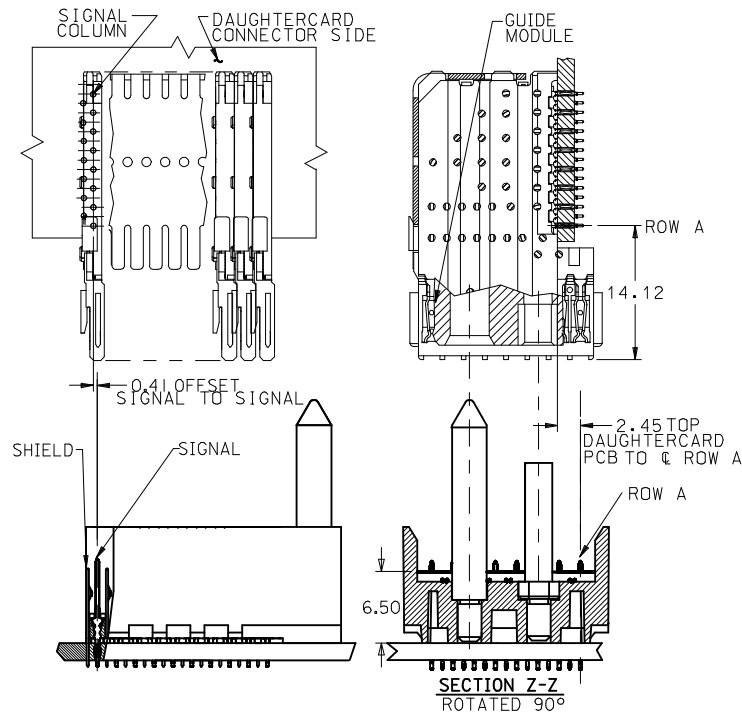

PART NUMBER	COLUMN	NUMBER OF SIGNAL PIN	NUMBER OF SHIELD	A	B	M	Au (um) THICKNESS	Sn (um) THICKNESS
74062-*0*1	10	80	10	27.00	18.00	4.75	0.76	0.76-1.52
74062-*0*6							1.27	
74062-*5*1	25	200	25	57.00	48.00	6.25	0.76	
74062-*5*6							1.27	
74062-*0*2	10	80	10	27.00	18.00	4.25	0.76	
74062-*0*7							1.27	
74062-*5*2	25	200	25	57.00	48.00	5.15	0.76	
74062-*5*7							1.27	
74062-*0*3	10	80	10	27.00	18.00	4.75	0.76	
74062-*0*8							1.27	
74062-*5*3	25	200	25	57.00	48.00	6.25	0.76	
74062-*5*8							1.27	
74062-*0*4	10	80	10	27.00	18.00	5.15	0.76	
74062-*0*9							1.27	
74062-*5*4	25	200	25	57.00	48.00	4.75	0.76	
74062-*5*9							1.27	

ADD NO GDE/NO KEY EC NO: UCP2009-2089 DRWN:BSWART 2009/02/23 CHKD:SDANIELLEY 2009/02/23 APPR:SMILLER 2009/02/23	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>3 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>2 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>1 PLACE</td> <td>± ---</td> <td>± ---</td> </tr> </table>			mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± ---	± ---	1 PLACE	± ---	± ---	DIMENSION STYLE MM ONLY		SCALE DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
			mm	INCH																				
		4 PLACES	± ---	± ---																				
		3 PLACES	± ---	± ---																				
2 PLACES	± ---	± ---																						
1 PLACE	± ---	± ---																						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		TITLE VHDM 8 ROW SHIELD END BACKPLANE SALES ASSEMBLY																				
MATERIAL NO. DOCUMENT NO.		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		MOLEX INCORPORATED																				
SIZE C		SD-74062-002		SHEET NO. 2 OF 2																				