

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0014441604](#)
Status: **Active**
Overview: [SL Modular Connectors](#)
Description: 2.54mm Pitch SL Insulation Displacement Connector Assembly, Male, Single Row, Version D, Back Ribs, for Wire Size 26 AWG, 0.38µm Gold (Au), 4 Circuits

Documents:

| | |
|--|---|
| 3D Model | Product Specification TS-70541-001-001 (PDF) |
| Drawing (PDF) | Packaging Specification PK-70873-0001-001 (PDF) |
| Product Specification PS-70400-001 (PDF) | RoHS Certificate of Compliance (PDF) |

Agency Certification

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|-------------------|---------------------------------------|
| Product Family | Ribbon Cable / Wire Trap Connectors |
| Series | 70475 |
| Comments | Terminals Preloaded |
| Component Type | Housing |
| Glow-Wire Capable | No |
| Overview | SL Modular Connectors |
| Product Name | SL |
| UPC | 800755032987 |

Physical


| | |
|--------------------------------|-----------------------------|
| Circuits (Loaded) | 4 |
| Circuits (maximum) | 4 |
| Color - Resin | Black |
| Durability (mating cycles max) | 50 |
| Entry Angle | Vertical |
| Flammability | 94V-0 |
| Lock to Mating Part | None |
| Material - Metal | Phosphor Bronze |
| Material - Plating Mating | Gold |
| Material - Plating Termination | Tin |
| Material - Resin | Polyester Alloy |
| Net Weight | 0.142/g |
| Number of Rows | 1 |
| PCB Retention | None |
| Packaging Type | Tube |
| Pitch - Mating Interface | 2.54mm |
| Polarized to Mating Part | No |
| Stackable | Yes |
| Surface Mount Compatible (SMC) | N/A |
| Temperature Range - Operating | -40° to +105°C |
| Termination Interface: Style | IDT or Pierce |
| Wire Insulation Diameter | 1.35mm max. |
| Wire Size AWG | 26 |
| Wire/Cable Type | Discrete Wire, Ribbon Cable |

Electrical

| | |
|-------------------------------|------|
| Current - Maximum per Contact | 1.8A |
| Voltage - Maximum | 250V |

Material Info

| | |
|--------------------|------------|
| Engineering Number | 70475-0773 |
|--------------------|------------|

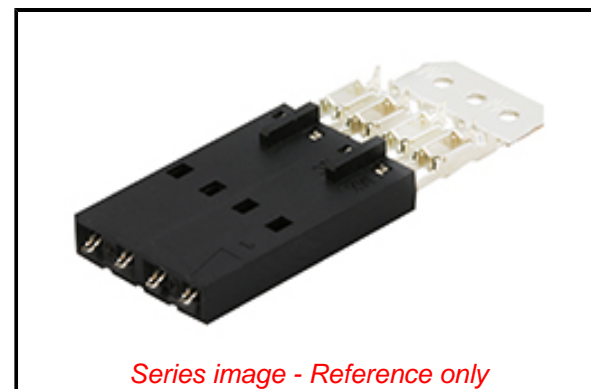

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

Prop65

RoHS Phthalates

Green Image

Not Relevant

Compliant

Not Contained

Search Parts in this Series

[70475](#) Series

Mates With

[70004](#) Interim Clip (Single Row), [70013](#) Interim Clip (Dual Row)

Use With

[7307](#) Tinned 28AWG, [7767](#) Topcoat 28AWG, [24241](#) Tinned 26AWG, [8996](#) Topcoat 26AWG, [24226](#) Tinned 24AWG, [8997](#) Topcoat 24AWG, [24369](#) High Flex 26AWG, [24389](#) High Flex 24AWG

Reference - Drawing Numbers

Packaging Specification

Product Specification

Sales Drawing

PK-70873-0001-001

PS-70400-001, TS-70541-001-001

SDA-70475-0771-0794

This document was generated on 09/10/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION