




## FEATURES

- Low leakage, low power, high surge
- Highly efficient reaction time
- $T_j$ : -40°C~+150°C
- Avalanche breakdown protection
- Polyimide passivation technology
- Epoxy resin molding, integrated encapsulation
- ROHS compliant

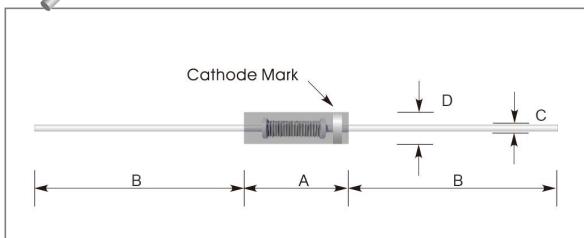

Electrical Characteristics (Tamb=25°C, unless otherwise specified )	Symbol	Conditions	Rated Value	Unit
Repetitive Peak Reverse Voltage	$V_{RRM}$		8	KV
Working Peak Reverse Voltage	$V_{RWM}$		8	KV
Average Forward Current max.	$I_o$	@oil $T_{break}=50^\circ\text{C}$	0.4	A
Max. Surge Current	$I_{FSM}$		15	A
Max. Forward Voltage Drop	$V_{FM}$	$T_a=25^\circ\text{C}$	12	V
Max. Reverse Recovery Time	$t_{rr}$	$I_F=50\text{mA}, I_R=100\text{mA}$	60	nS
Max. Reverse Current	$I_{RRM}$		2.0	$\mu\text{A}$
Max. Temperature Junction	$T_j$		150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$		-55 ~ +175	$^\circ\text{C}$