
SEMiX151GD126HDs

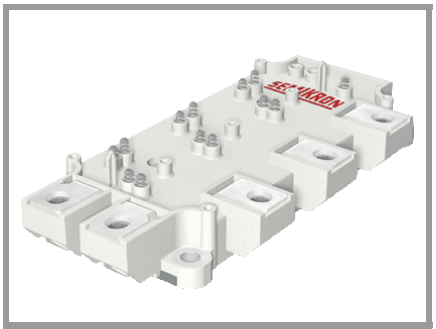

SEMiX®13

Trench IGBT Modules

SEMiX151GD126HDs

Preliminary Data

Features


- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability
- UL recognised file no. E63532

Typical Applications

- AC inverter drives
- UPS
- Electronic Welding

Remarks

- Case temperatur limited to T_C=125°C max.
- Not for new design




GD

Absolute Maximum Ratings				
Symbol	**Conditions**		**Values**	**Unit**
IGBT				
V_{CES}			1200	V
I_C	T_j = 150 °C	T_c = 25 °C	168	A
		T_c = 80 °C	119	A
I_{Cnom}			100	A
I_{CRM}	I_{CRM} = 2xI_{Cnom}		200	A
V_{GES}			-20 ... 20	V
t_{psc}	V_{CC} = 600 V $V_{GE} \leq$ 20 V T_j = 125 °C $V_{CES} \leq$ 1200 V		10	µs
T_j			-40 ... 150	°C
Inverse diode				
I_F	T_j = 150 °C	T_c = 25 °C	152	A
		T_c = 80 °C	105	A
I_{Fnom}			100	A
I_{FRM}	I_{FRM} = 2xI_{Fnom}		200	A
I_{FSM}	t_p = 10 ms, sin 180°, T_j = 25 °C		700	A
T_j			-40 ... 150	°C
Module				
$I_{t(RMS)}$			600	A
T_{stg}			-40 ... 125	°C
V_{isol}	AC sinus 50Hz, t = 1 min		4000	V

Characteristics						
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Unit**
IGBT						
$V_{CE(sat)}$	I_C = 100 A V_{GE} = 15 V chiplevel	T_j = 25 °C		1.7	2.1	V
		T_j = 125 °C		2.00	2.45	V
V_{CE0}		T_j = 25 °C		1	1.2	V
		T_j = 125 °C		0.9	1.1	V
r_{CE}	V_{GE} = 15 V	T_j = 25 °C		7.0	9.0	mΩ
		T_j = 125 °C		11.0	13.5	mΩ
$V_{GE(th)}$	V_{GE}=V_{CE}, I_C = 4 mA		5	5.8	6.5	V
I_{CES}	V_{GE} = 0 V V_{CE} = 1200 V	T_j = 25 °C		0.1	0.3	mA
		T_j = 125 °C				mA
C_{ies}	V_{CE} = 25 V V_{GE} = 0 V	f = 1 MHz		7.2		nF
C_{oes}		f = 1 MHz		0.38		nF
C_{res}		f = 1 MHz		0.33		nF
Q_G	V_{GE} = - 8 V...+ 15 V			800		nC
R_{Gint}	T_j = 25 °C			7.50		Ω
$t_{d(on)}$	V_{CC} = 600 V I_C = 100 A T_j = 125 °C $R_{G\ on}$ = 1.7 Ω $R_{G\ off}$ = 1.7 Ω			290		ns
t_r				50		ns
E_{on}				12		mJ
$t_{d(off)}$				605		ns
t_f				110		ns
E_{off}				14		mJ
$R_{th(j-c)}$	per IGBT				0.21	K/W
$R_{th(j-s)}$	per IGBT					K/W

SEMiX151GD126HDs

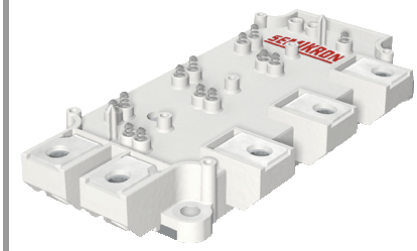

SEMiX®13

Trench IGBT Modules

SEMiX151GD126HDs

Preliminary Data

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability
- UL recognised file no. E63532


Typical Applications

- AC inverter drives
- UPS
- Electronic Welding

Remarks

- Case temperatur limited to T_C=125°C max.
- Not for new design

Characteristics						
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Unit**
Inverse diode						
$V_F = V_{EC}$	I_F = 100 A V_{GE} = 0 V chiplevel	T_j = 25 °C		1.6	1.8	V
		T_j = 125 °C		1.6	1.8	V
V_{F0}		T_j = 25 °C	0.9	1	1.1	V
		T_j = 125 °C	0.7	0.8	0.9	V
r_F		T_j = 25 °C	5.0	6.0	7.0	mΩ
		T_j = 125 °C	7.0	8.0	9.0	mΩ
I_{RRM}	I_F = 100 A di/dt_{off} = 2900 A/µs V_{GE} = -15 V V_{CC} = 600 V	T_j = 125 °C		125		A
Q_{rr}		T_j = 125 °C		26		µC
E_{rr}		T_j = 125 °C		11.5		mJ
$R_{th(j-c)}$	per diode				0.36	K/W
$R_{th(j-s)}$	per diode					K/W
Module						
L_{CE}				20		nH
$R_{CC'+EE'}$	res., terminal-chip	T_C = 25 °C		0.7		mΩ
		T_C = 125 °C		1		mΩ
$R_{th(c-s)}$	per module			0.04		K/W
M_s	to heat sink (M5)		3		5	Nm
M_t		to terminals (M6)	2.5		5	Nm
						Nm
w					350	g
Temperature sensor						
R_{100}	T_c=100°C (R_{25}=5 kΩ)			0,493 ±5%		kΩ
$B_{100/125}$	$R_{(T)}=R_{100}\exp[B_{100/125}(1/T-1/T_{100})]$; T[K];			3550 ±2%		K



GD

 © by SEMIKRON

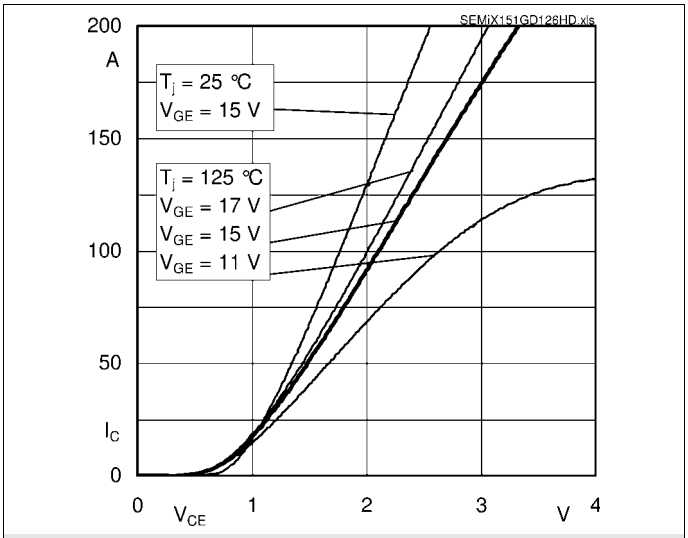


Fig. 1 Typ. output characteristic, inclusive $R_{CC'+ EE'}$

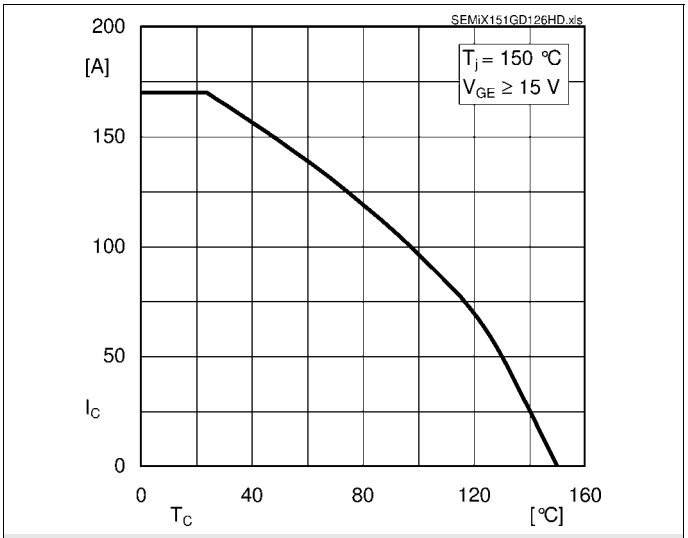


Fig. 2 Rated current vs. temperature $I_C = f(T_C)$

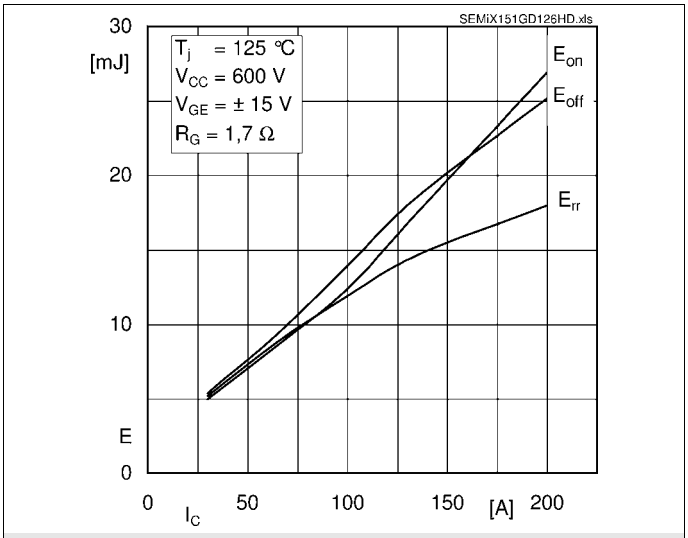


Fig. 3 Typ. turn-on /-off energy = f (I_C)

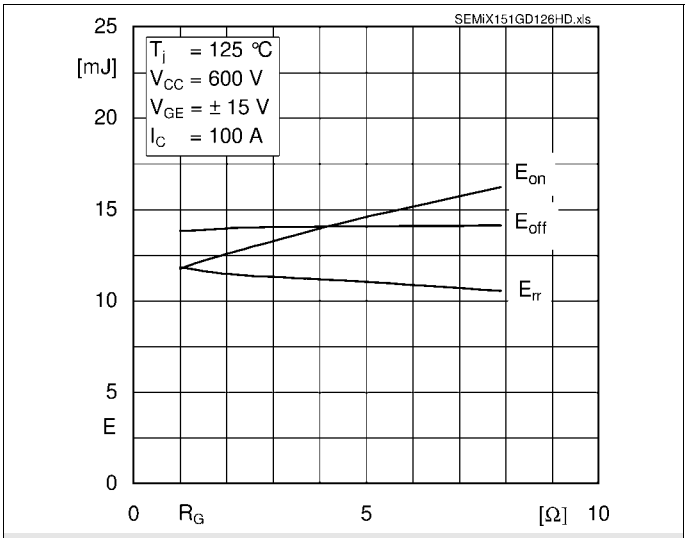


Fig. 4 Typ. turn-on /-off energy = f (R_G)

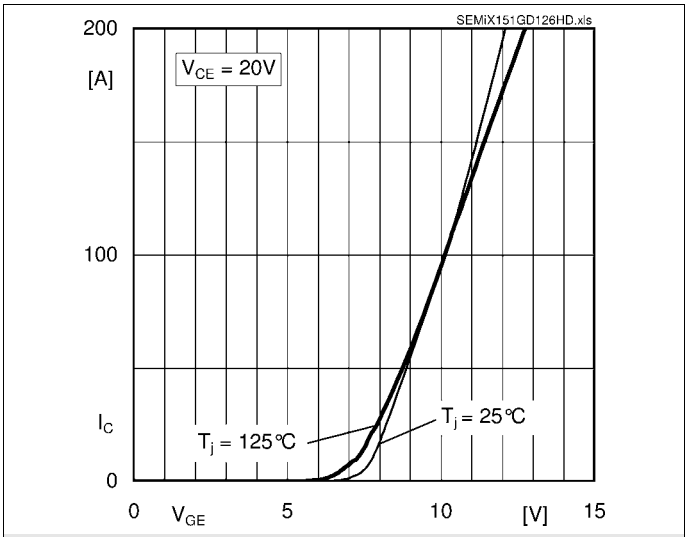


Fig. 5 Typ. transfer characteristic

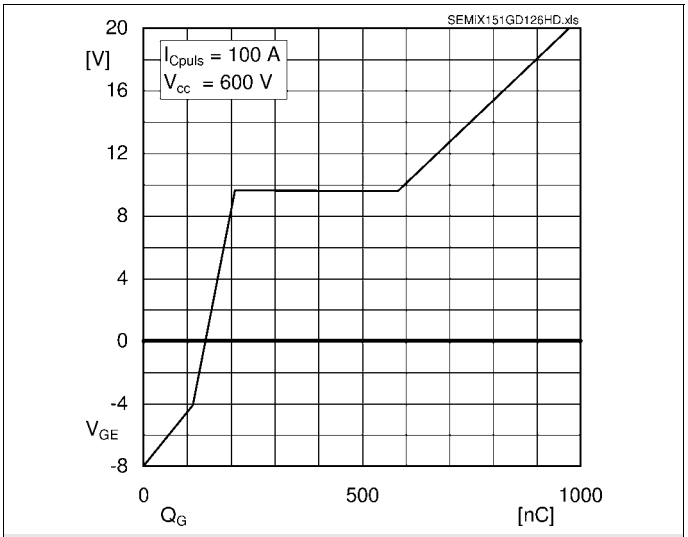


Fig. 6 Typ. gate charge characteristic

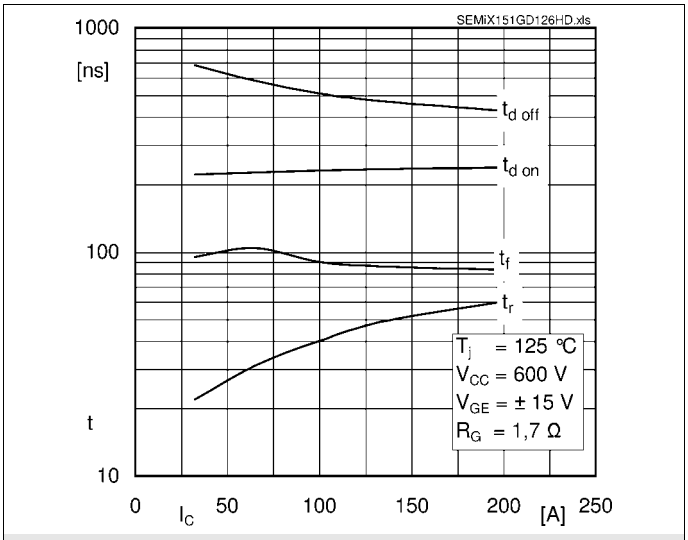


Fig. 7 Typ. switching times vs. I_C

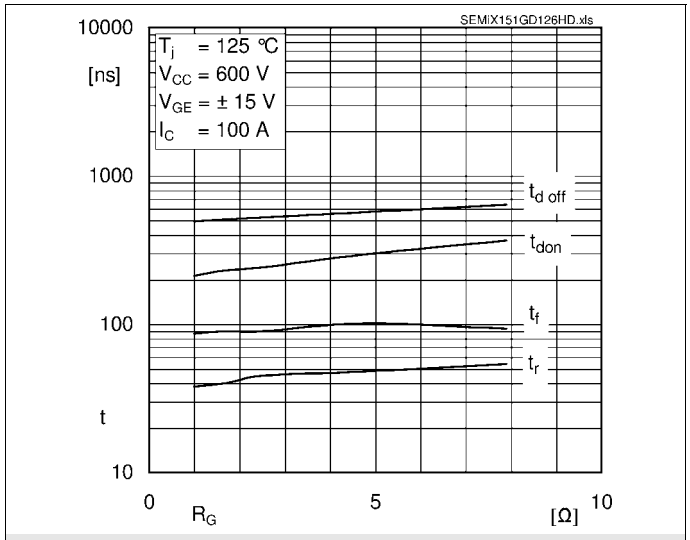


Fig. 8 Typ. switching times vs. gate resistor R_G

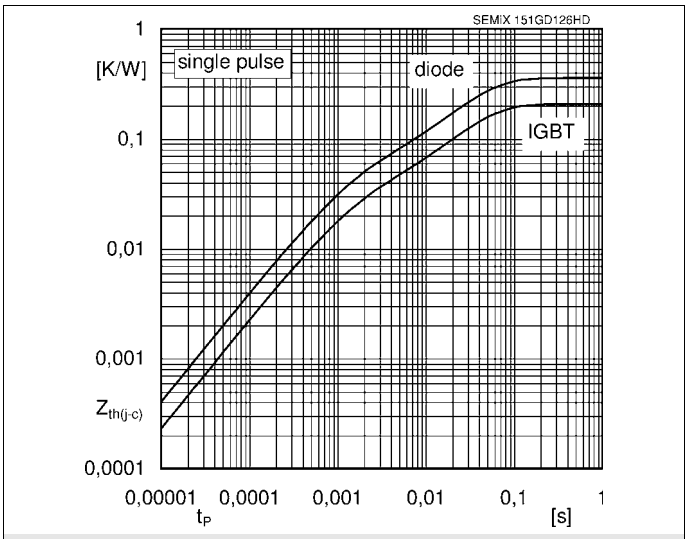


Fig. 9 Typ. transient thermal impedance

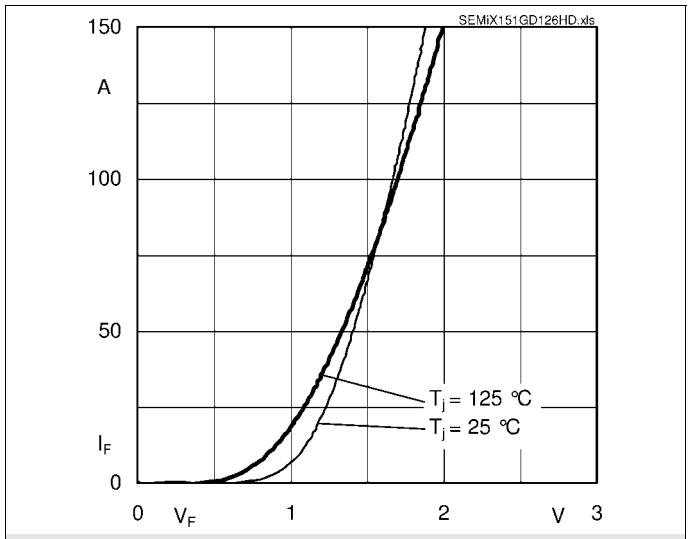


Fig. 10 Typ. CAL diode forward charact., incl. $R_{CC'+EE'}$

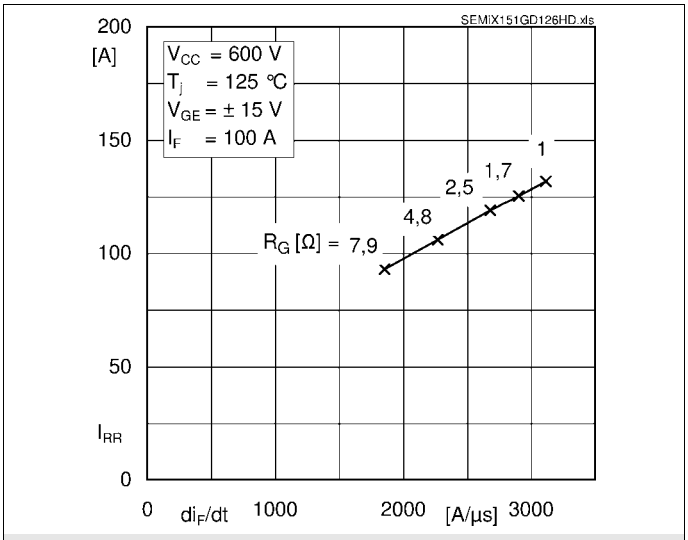


Fig. 11 Typ. CAL diode peak reverse recovery current



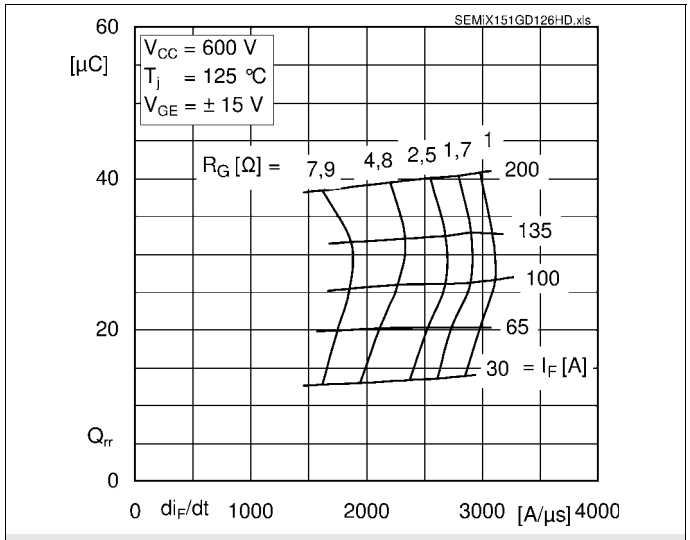


Fig. 12 Typ. CAL diode recovery charge

 © by SEMIKRON

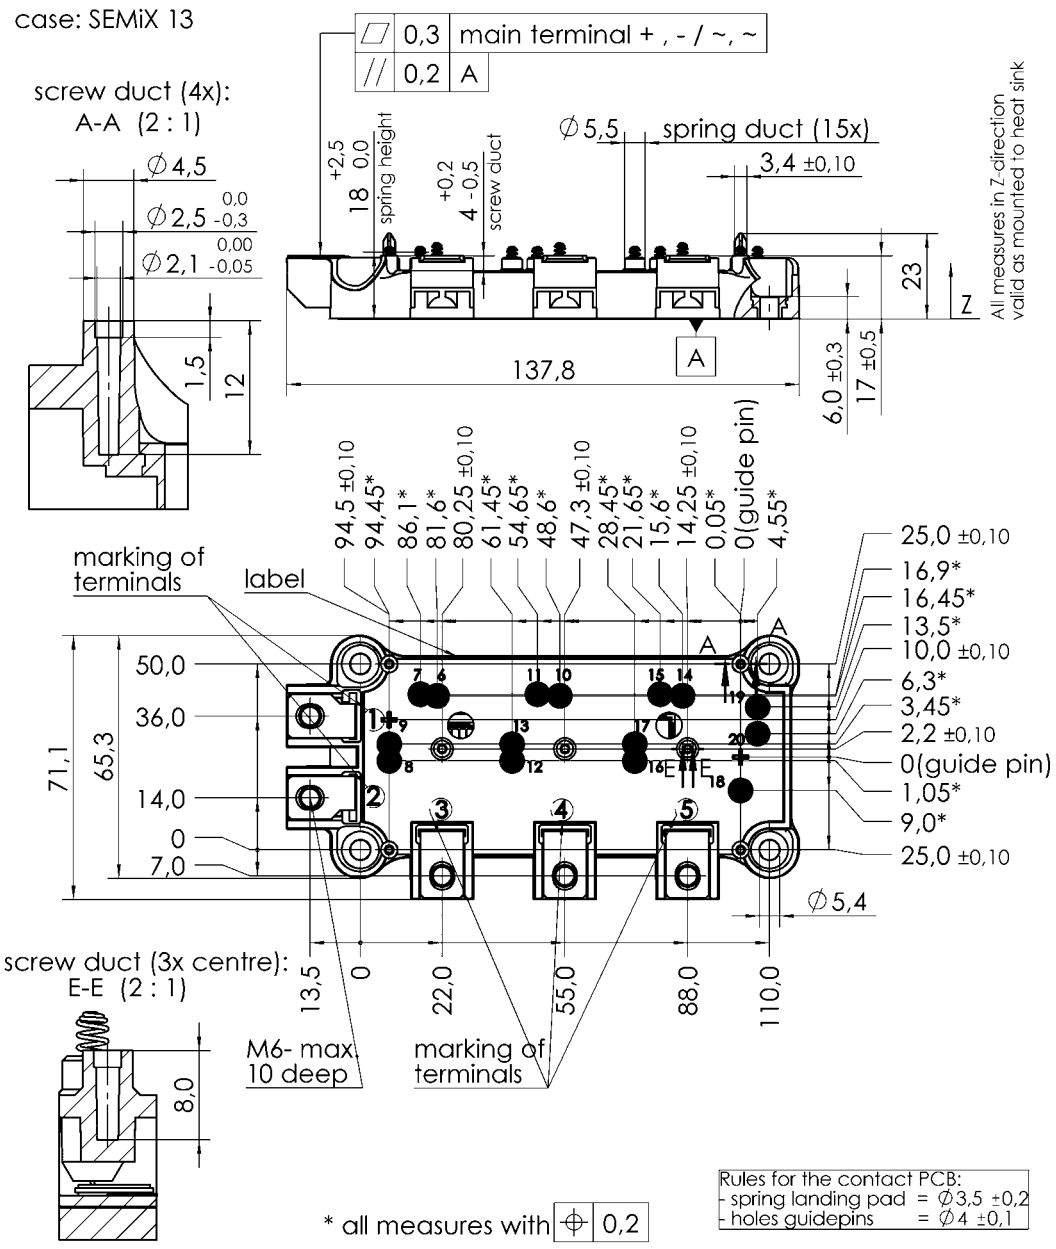

SEMiX 13

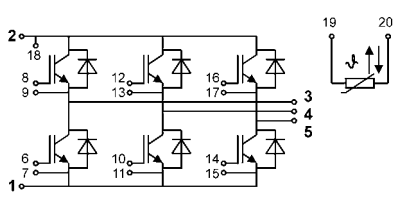

GD

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.