


## SILICON HIGH VOLTAGE RECTIFIER

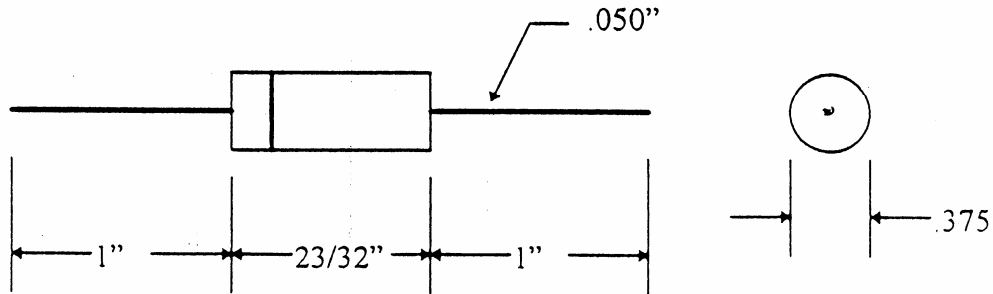

PART NUMBER	PIV VOLTS	$I_o$ mA @ 40° C	$V_f$ @ $I_o$ @ 25° C	$I_r$ @ PIV @ 25° C	MAX SINGLE CYCLE SURGE CURRENT @ 60 Hz
B933-50	5000	800	7	10 uA	100 AMPS
B933-60	6000	700	10	10 uA	100 AMPS
B933-70	7000	550	10	10 uA	100 AMPS
B933-80	8000	500	12	10 uA	100 AMPS
B933-90	9000	430	12	10 uA	100 AMPS
B933-100	10000	350	15	10 uA	100 AMPS
B933-110	11000	250	15	10 Ua	100 AMPS
B933-120	12000	250	15	10 uA	100 AMPS
B933-130	13000	250	15	10 uA	100 AMPS
B933-140	14000	250	15	10 uA	100 AMPS
B933-150	15000	250	16	10 uA	100 AMPS
B933-160	16000	200	25	10 uA	100 AMPS
B933-170	17000	200	25	10 uA	100 AMPS
B933-180	18000	200	25	10 uA	100 AMPS
B933-190	19000	200	25	10 uA	100 AMPS
B933-200	20000	200	25	10 uA	100 AMPS

OPERATING TEMPERATURE, -55° C TO +150° C

STORAGE TEMPERATURE, -55° C TO +150° C

(203) 467-2591 TEL

(203) 469-5928 FAX

Email: Info@ edal.com

Internet: <http://www.edal.com>

***EDAL*** industries, inc.

51 Commerce St. East Haven, CT 06512