PANJIT SEMI CONDUCTOR

DATA SHEET

PG100R~PG1010R

GLASS PASSIVATED JUNCTION FAST RECOVERY RECTIFIERS

VOLTAGE 50 to 1000 Volts **CURRENT** 1.0 Amperes

FEATURES

- High current capability.
- Plastic package has Underwriters Laboratories Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound.
- Low leakage.
- Fast switching for high efficiency.
- Exceeds environmental standards of MIL-S-19500/228
- Pb free product are available : 99% Sn can meet Rohs environment substance directive request

MECHANICALDATA

Case: Molded plastic, DO-41


Terminals: Axial leads, solderable per MIL-STD-202G,Method 208

Polarity: Band denotes cathode

Mounting Position: Any

Weight: 0.012 ounce, 0.3 gram

DO-41 Unit: inch(mm)

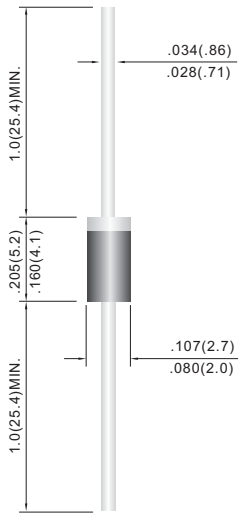

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz.

PARAMETER	SYMBOL	PG100R	PG101R	PG102R	PG104R	PG106R	PG108R	PG1010R	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current .375"(9.5mm) lead length at T_A=55°C	I_{AV}	1							A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I_{FSM}	30							A
Maximum Forward Voltage at 1.0A	V_F	1.3							V
Maximum DC Reverse Current at T_A=25°C at Rated DC Blocking Voltage T_A=100°C	I_R	5 150							μA
Typical Junction capacitance (Note 1)	C_J	12							pF
Maximum Reverse Recovery Time	trr	150				250	500		ns
Typical Thermal Resistance	RθJA	67							°C / W
Operating and Storage Temperature Range	T_J,T_{STG}	-50 TO +150							°C

NOTES:1. Reverse Recovery Test Conditions: I_F=.5A, I_R=1A, I_{rr}=.25A

2. Measured at 1 MHz and applied reverse voltage of 4.0 VDC

3. Thermal resistance from junction to ambient and from junction to lead length 0.375"(9.5mm) P.C.B. mounted

RATING AND CHARACTERISTIC CURVES

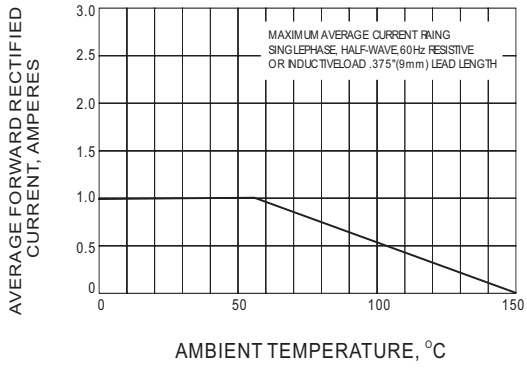


Fig.1 FORWARD CURRENT DERATING CURVE

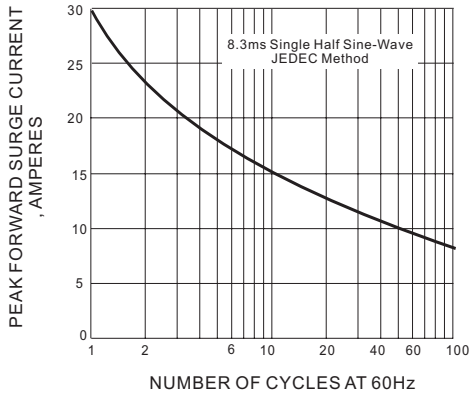


Fig.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

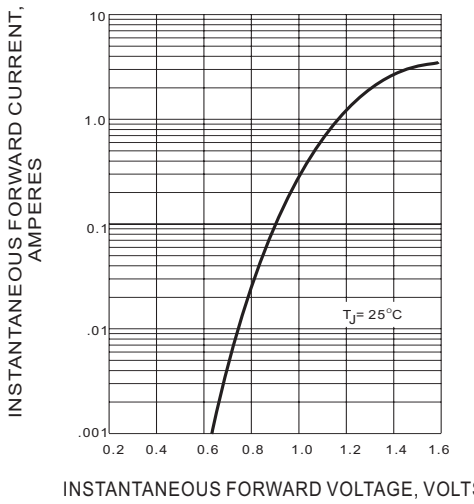


Fig.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

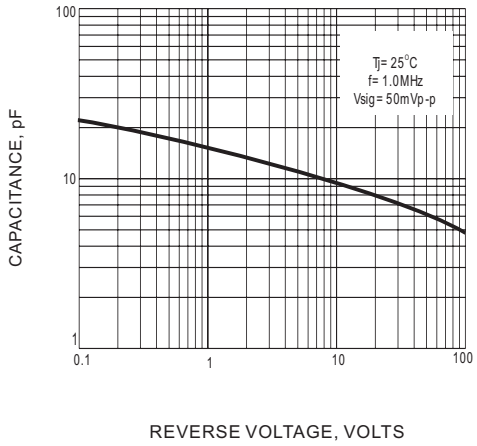


Fig.4 TYPICAL JUNCTION CAPACITANCE