

## Limit Alarms (rotary switch adj.) AL-UNIT


### RTD ALARM

#### Functions & Features

- Providing SPDT relay outputs at preset input levels
- Direct input from an RTD • Dual (Hi/Lo) trip
- Linearization
- Burnout protection
- "Active bridge" circuit containing two constant current sources allows large leadwire resistances up to 200 Ω
- Energized or de-energized coil at a tripped condition selectable
- Rotary switch setpoint adjustments
- Enclosed relays
- Relays can be powered 110 V DC
- High-density mounting

#### Typical Applications

- Annunciator
- Various alarm applications



## MODEL: ALR-[1][2][3]-[4][5]

### ORDERING INFORMATION

- Code number: ALR-[1][2][3]-[4][5]
- Specify a code from below for each of [1] through [5].  
(e.g. ALR-111-B/BL/Q)
- Temperature range (e.g. 0 - 250°C)
- Specify the specification for option code /Q  
(e.g. /C01/S01)

#### [1] INPUT RTD (2- or 3-wire)

- 1:** JPt 100 (JIS'89)  
(Usable range: -200 to +500°C, -328 to +932°F; min.span: 50°C, 90°F)
- 3:** Pt 100 (JIS'89)  
(Usable range: -200 to +650°C, -328 to +1202°F; min.span: 50°C, 90°F)
- 4:** Pt 100 (JIS'97, IEC)  
(Usable range: -200 to +650°C, -328 to +1202°F; min.span: 50°C, 90°F)
- 5:** Pt 50 Ω (JIS'81)  
(Usable range: -200 to +500°C, -328 to +932°F; min.span: 100°C, 180°F)

**6:** Ni 508.4 Ω

(Usable range: -50 to +200°C, -58 to +392°F; min.span: 30°C, 54°F)

**0:** Specify

Note: Consult M-System for 2-wire RTD

#### [2] SETPOINT 1 OUTPUT

- 1:** Hi (coil energized at alarm)  
**2:** Hi (coil de-energized at alarm)  
**3:** Lo (coil energized at alarm)  
**4:** Lo (coil de-energized at alarm)

#### [3] SETPOINT 2 OUTPUT

- 1:** Hi (coil energized at alarm)  
**2:** Hi (coil de-energized at alarm)  
**3:** Lo (coil energized at alarm)  
**4:** Lo (coil de-energized at alarm)

#### [4] POWER INPUT

##### AC Power

- B:** 100 V AC  
**C:** 110 V AC  
**D:** 115 V AC  
**F:** 120 V AC  
**G:** 200 V AC  
**H:** 220 V AC  
**J:** 240 V AC

##### DC Power

- S:** 12 V DC  
**R:** 24 V DC  
**V:** 48 V DC  
**P:** 110 V DC

#### [5] OPTIONS (multiple selections)

##### Burnout

- blank:** Upscale burnout  
**/BL:** Downscale burnout

##### Other Options

- blank:** none  
**/Q:** Option other than the above (specify the specification)

#### SPECIFICATIONS OF OPTION: Q (multiple selections)

##### COATING (For the detail, refer to M-System's web site.)

- /C01:** Silicone coating  
**/C02:** Polyurethane coating  
**/C03:** Rubber coating

##### TERMINAL SCREW MATERIAL

- /S01:** Stainless steel

## GENERAL SPECIFICATIONS


**Construction:** Plug-in  
**Connection:** M3.5 screw terminals  
**Screw terminal:** Chromated steel (standard) or stainless steel  
**Housing material:** Flame-resistant resin (black)  
**Isolation:** Input to output 1 to output 2 to power  
**Setpoint adjustments:** 10-position rotary switches (front); 0 - 99 % independently; 1 % increments  
**Linearization:** Standard  
**Hysteresis (deadband):** 0.7 - 2.5 %  
**Front LEDs:** Red LED turns on when the coil is energized.  
**Power ON timer:** Relays de-energized for approx. 2 seconds after power is turned on.

## INPUT SPECIFICATIONS

**Maximum leadwire resistance:** 200 Ω per wire (3-wire)  
**Sensing current:** 2 mA

## OUTPUT SPECIFICATIONS

■ **Relay Contact:** 100 V AC @ 1 A ( $\cos \phi = 1$ )  
 120 V AC @ 1 A ( $\cos \phi = 1$ )  
 240 V AC @ 0.5 A ( $\cos \phi = 1$ )  
 30 V DC @ 1 A (resistive load)  
**Maximum switching voltage:** 380 V AC or 125 V DC  
**Maximum switching power:** 120 VA or 30 W  
**Minimum load:** 5 V DC @ 10 mA  
**Mechanical life:**  $5 \times 10^7$  cycles  
 For maximum relay life with inductive loads, external protection is recommended.

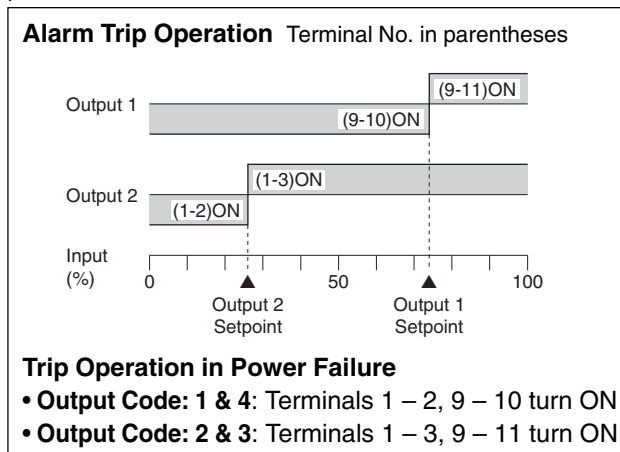

approx. 2 W (80 mA at 24 V)

**Operating temperature:** -5 to +60°C (23 to 140°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Mounting:** Surface or DIN rail

**Weight:** 370 g (0.82 lb)

## PERFORMANCE in percentage of span

**Setpoint accuracy:**  $\pm 0.7$  %

**Trip point repeatability:**  $\pm 0.05$  %

**Temp. coefficient:**  $\pm 0.015$  %/°C ( $\pm 0.008$  %/°F)

**Response time:** Approx. 0.5 sec. (0 - 100 % at 90 % setpoint)

**Burnout response:**  $\leq 10$  sec.

**Line voltage effect:**  $\pm 0.1$  % over voltage range

**Insulation resistance:**  $\geq 100$  MΩ with 500 V DC


**Dielectric strength:** 2000 V AC @1 minute (input to output 1 to output 2 to power to ground)

## INSTALLATION


### Power input

- **AC:** Operational voltage range: rating  $\pm 10$  %, 50/60  $\pm 2$  Hz, approx. 2 VA
- **DC:** Operational voltage range: rating  $\pm 10$  %, or 85 - 150 V for 110 V rating (ripple 10 % p-p max.)

## EXTERNAL VIEW

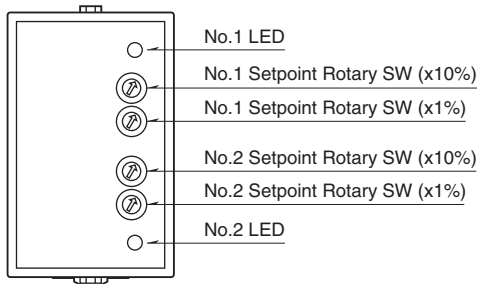


## EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm (inch)

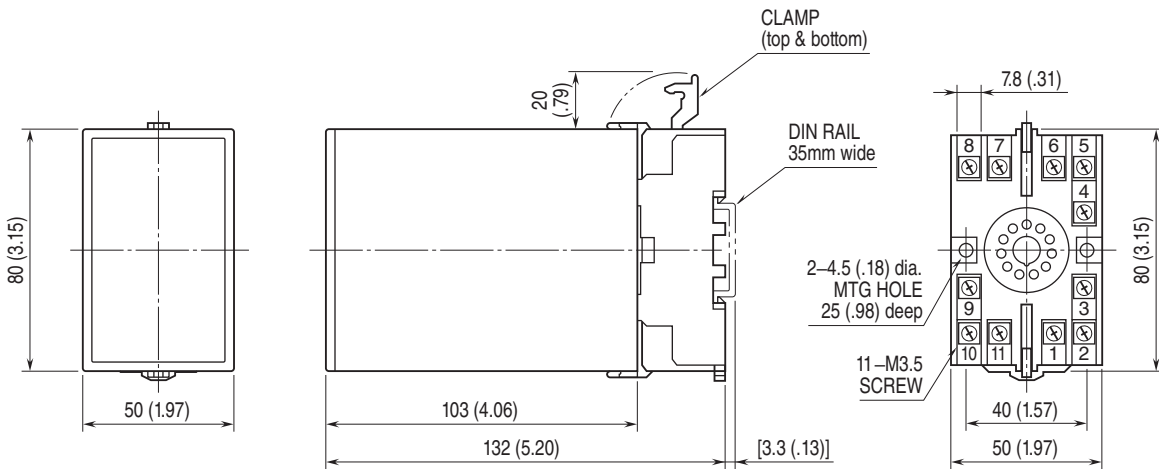

• When mounting, no extra space is needed between units.


## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

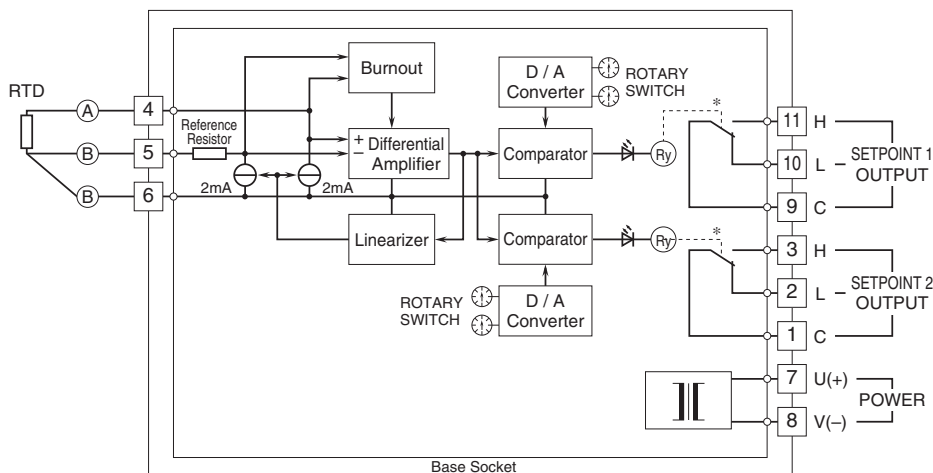


\*Relay status for output codes "1" & "4", at power OFF.

### ■ Relay Protection

#### • AC Powered



#### • DC Powered





Specifications are subject to change without notice.