

Specification

Insulator Material: Polyesetr, UL94V-0

Nylon-6T




Contact Material: Phosphor Bronze(C5191)

Current Rating : 1.5Amp

Insulation Resistance : 1000MΩ Min.

Dielectric withstanding Voltage: AC 500V

Operation Temperature : -40℃ -- +105℃

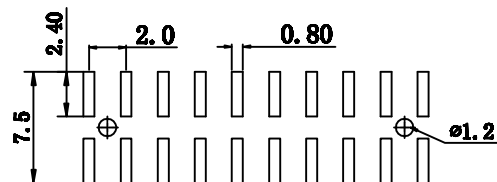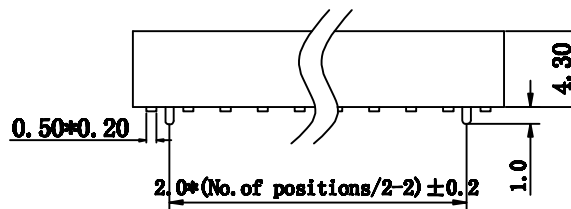

P. C. B. LAYOUT

TOLERANCE TABLE

.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	C _{kmtw} 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO., LTD					
CHECKED:	DATE:	TITLE: 220-2SMT-2*XP H=4.3 带定位柱					
DRAWN:	DATE:	CLIENT P/N /					
LYF	2008-07-23	UNIT	mm	SCALE	free	⊕	≡
		FILE NO.	Ckmtw-220-20016		REV.	A	