MOSPEC

UF20C60

Utra Fast Recovery Rectifier Diodes


Designed for use in switching power supplies. inverters and as free wheeling diodes. These state-of-the-art devices have the following features:

- ∗Low T_{RR}
- ∗High Surge Capacity
- ∗Low Power Loss, High efficiency
- ∗175℃ Operating Junction Temperature
- ∗Low Forward Voltage , High Frequency
- ∗High-Switching Speed 21(typ.) Nanosecond Recovery Time
- ∗Plastic Material used Carries Underwriters Laboratory


∗*In compliance with EU RoHs 2002/95/EC directives*

ULTRA FAST RECTIFIERS


20 AMPERES 600 VOLTS



TO-220AB



DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.32
B	9.78	10.42
C	5.02	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	2.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.98
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90



Common Cathode
Suffix "C"

MAXIMUM RATINGS

Characteristic	Symbol	UF20C60	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	600	V
RMS Reverse Voltage	$V_{R(RMS)}$	420	V
Average Rectifier Forward Current (per diode) Total Device (Rated V_R),T_C=55℃	$I_{F(AV)}$	10 20	A
Peak Repetitive Forward Current (Rate V_R, Square Wave, 20kHz,T_C=125℃)	I_{FM}	20	A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions half-wave, single phase, 60Hz)	I_{FSM}	175	A
Operating and Storage Junction Temperature Range	T_J , T_{stg}	-65 to +175	℃

ELECTRIAL CHARACTERISTICS

Characteristic	Symbol	Min	TYPE	MAX.	Unit
Maximum Instantaneous Forward Voltage (I_F =10 Amp T_C = 25℃) (I_F =10 Amp T_C = 125℃)	V_F		2.2 1.95	2.5 2.3	V
Maximum Instantaneous Reverse Current (Rated DC Voltage, T_C = 25℃) (Rated DC Voltage, T_C = 125℃)	I_R			25 10	uA mA
Reverse Recovery Time (I_F = 0.5 A, I_R =1.0 , I_{rr} =0.25 A)	T_{rr}		20	25	ns
Typical Thermal Resistance junction to case	$R_{\theta j\text{-}c}$		3.6		℃/w

UF20C60

FIG-1 TYPICAL FORWARD CHARACTERISITICS

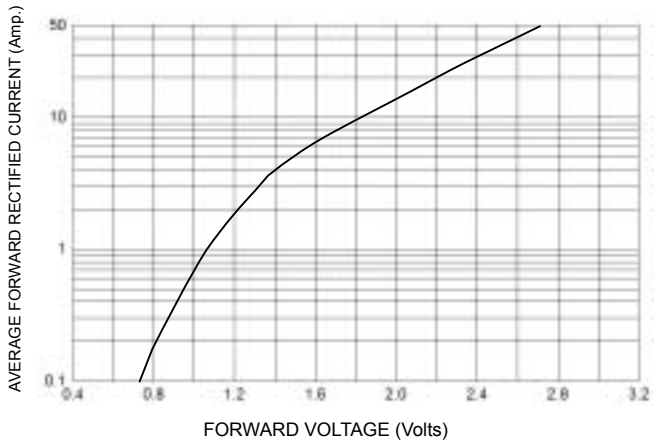


FIG-2 TYPICAL REVERSE CHARACTERISTICS

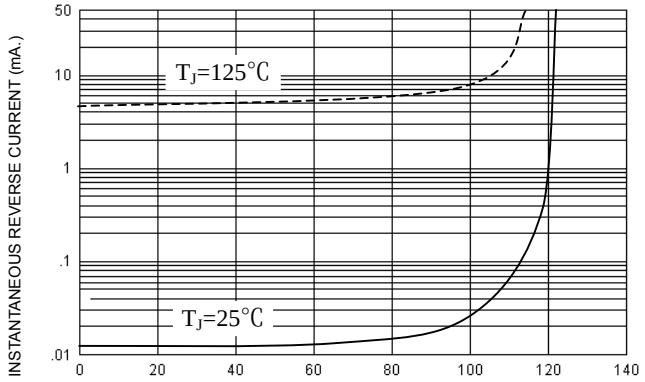


FIG-3 FORWARD CURRENT DERATING CURVE

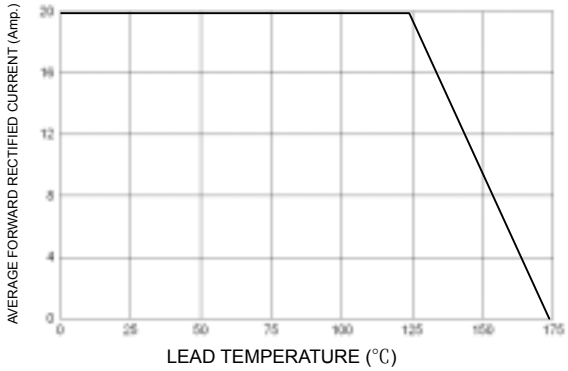


FIG-4 TYPICAL JUNCTION CAPACITANCE




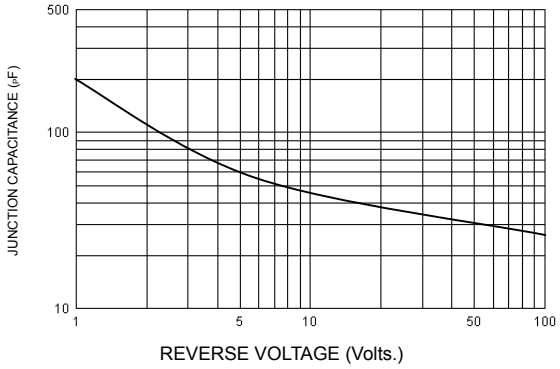


FIG-5 PEAK FORWARD SURGE CURRENT

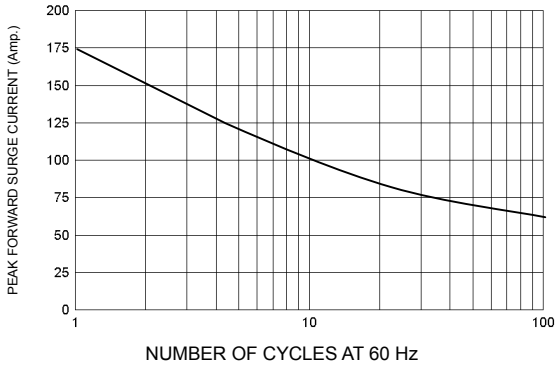

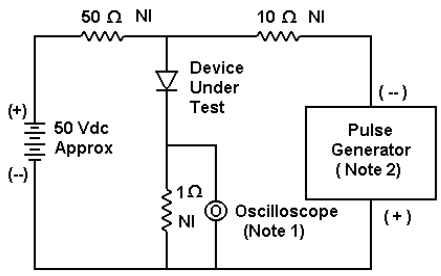

Notes:
1. Rise Time = 7 ns max. Input Impedance =1 M Ω , 22 pF
2. Rise Time = 10 ns max. Input Impedance = 50 Ω

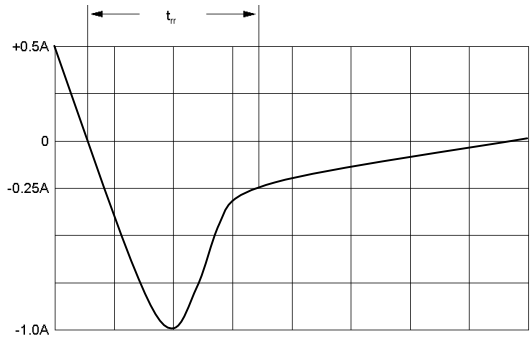

Set time base for 10/20 ns/cm

FIG-6 Reverse Recovery Time Characteristic and Test Circuit Diagram