
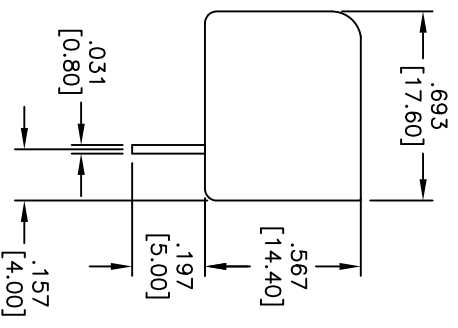
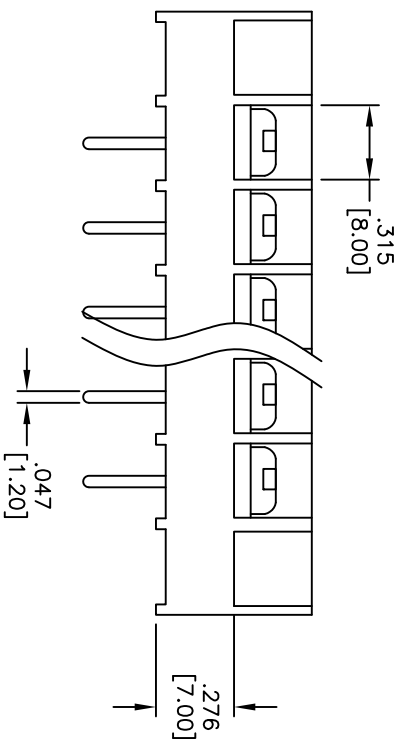


| Rev | AWO # | Description | Date | Appr |
|-----|-------|---------------|---------|------|
| - | | RELEASED | 6/8/05 | |
| A | | REDRAWN | 5/24/13 | |
| B | | REVISED SHAPE | 6/6/13 | |

APPROVED: _____
 DATE: _____ TITLE: _____

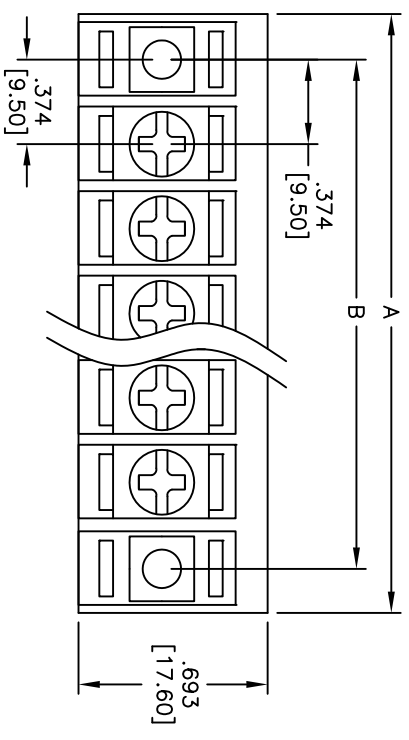

Positions: 02 thru 32
 A = .374 [9.50] x No. of Spaces + 1.181±.031 [30.00±0.80]
 B = .374 [9.50] x No. of Spaces + .748±.020 [19.00±0.50]

SPECIFICATIONS:
 Material: Nylon 66, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass, Tin Plated
 Screws: M3.5, Nickel Plated Brass
 Electrical:
 Operating voltage: 300 VAC max.
 Current rating: 15 Amps max.
 Insulation resistance: 1000 Mohms min. @ DC500V
 Dielectric withstanding voltage: 2,000 VAC for 1 minute
 Mechanical:
 Wire Range Awg: 14 – 22 STR
 Screw Torque Value: 12Kg-cm
 Temperature Rating:
 Operating temperature: -40°C to +120°C
 Environmental:
 Lead free, RoHS compliant



| | |
|--|-------------|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] | |
| TOLERANCES: EXCEPT AS NOTED | HOLDS |
| .X ± .10 | ØX ± .10 |
| .XX ± .020 | ØXX ± .015 |
| .XXX ± .015 | ØXXX ± .010 |
| APPROVALS | DATE |
| DRAWN | SS |
| CHECKED | |
| APPROVED | |

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .374 [9.50] CLOSED SIDE BARRIER BLOCK
 VERTICAL, PCB TAILS, MOUNT ENDS

| | | |
|------|-------------|--------------|
| SIZE | PART NO. | REV. |
| X | TBG-XX-01-M | B |
| REF: | S00031T | SCALE: NTS |
| | | SHEET 1 OF 1 |