


Absolute Maximum Rating¹

Parameter	Absolute Maximum
RF Power ²	+22 dBm
LO Power ²	+13 dBm
Total Power	+23 dBm
Operating Temp	-40°C to +85°C
Storage Temp	-65°C to +150°C
Max Current	120 mA


1. Exceeding these limits may cause permanent damage.
2. Ambient temperature (T_A) = +25°

Typical Performance


CONVERSION GAIN vs FREQUENCY

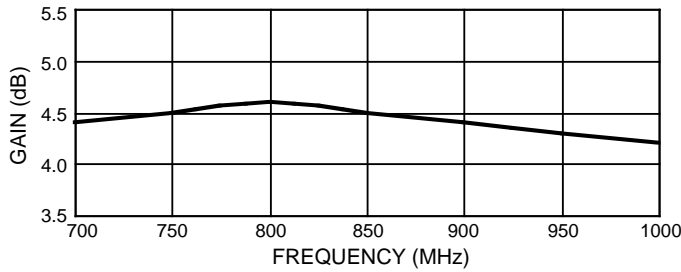

INPUT INTERCEPT POINT vs FREQUENCY

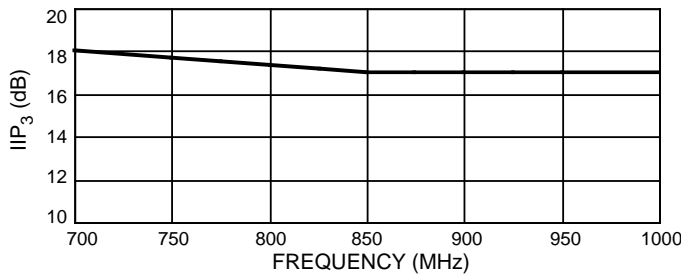

ISOLATION vs FREQUENCY

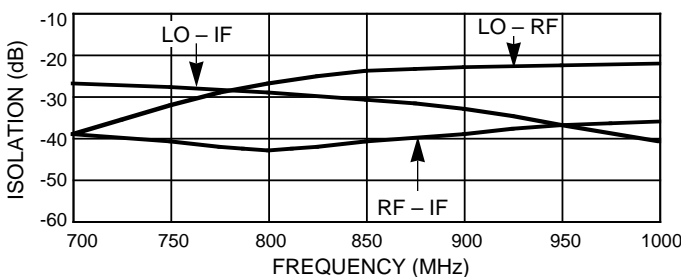

This Preliminary Specifications Data Sheet Contains Typical Electrical Specifications Which May Change Prior to Final Introduction.