16GHz Surface Mount Bandpass Filter

B161LA0S

www.dilabs.com

DLI • Novacap • Syfer • Voltronics

www.knowlescapacitors.com

DESCRIPTION

DLI's 16GHz bandpass filter offers unmatched size and performance in a surface mount configuration. This filter utilizes DLI's low loss temperature stable materials which offer small size and minimal performance variation over temperature.

FEATURES


- Small Size
- Frequency Stable over Temperature
- Solder Surface Mount Package
- Excellent Repeatability
- Operating Temp: -55˚C to +125˚C
- Characteristic Impedance: 50Ω

SPECIFICATIONS*

Parameter	Frequency Range (GHz)	Min	Typ.	Max
Insertion Loss (dB)	15.5 - 16.5		4	6
Return Loss (dB)		10	12	
Low Side Rejection (dB)	DC - 14.7	30	40	
High Side Rejection (dB)	17.2 - 22	30	40	
Input Power (W)				TBD

*Electrical specifications based on typical probed performance at room temperature. Insertion loss shall vary ±0.5dB over temperature.

Typical Measured Performance

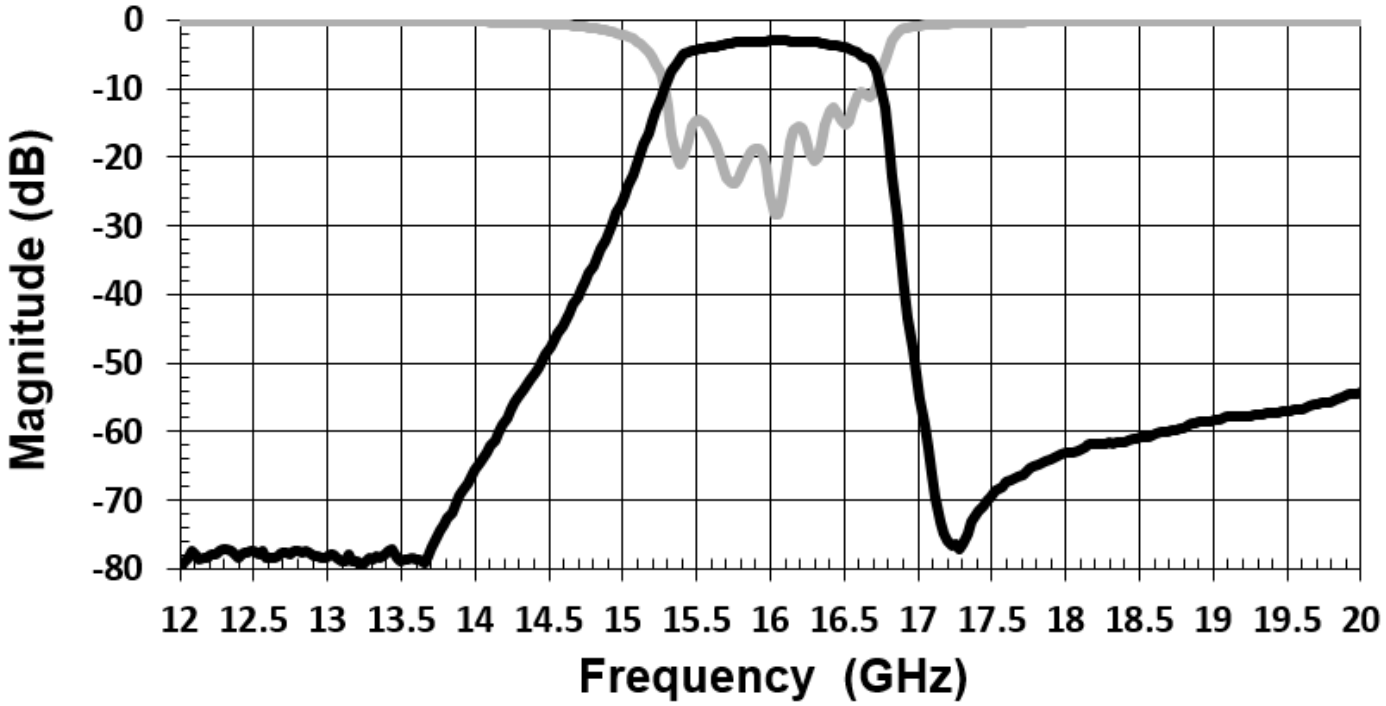

2777 Route 20 East, Cazenovia, NY 13035| Ph.: (315)655-8710 | KCCSales@knowles.com


16GHz Surface Mount Bandpass Filter


B161LA0S

www.dilabs.com

DLI • Novacap • Syfer • Voltronics


www.knowlescapacitors.com

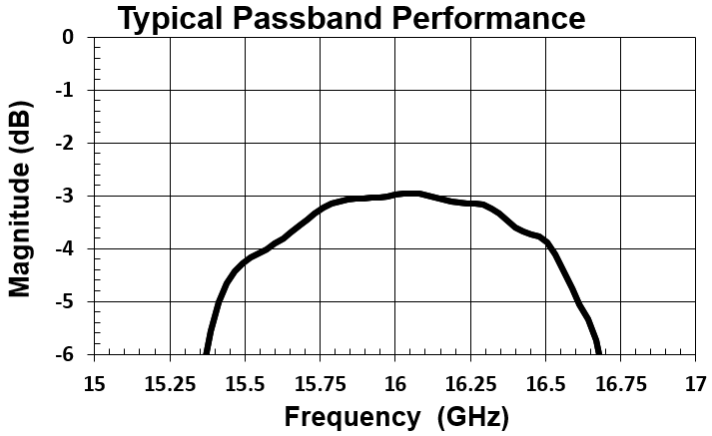

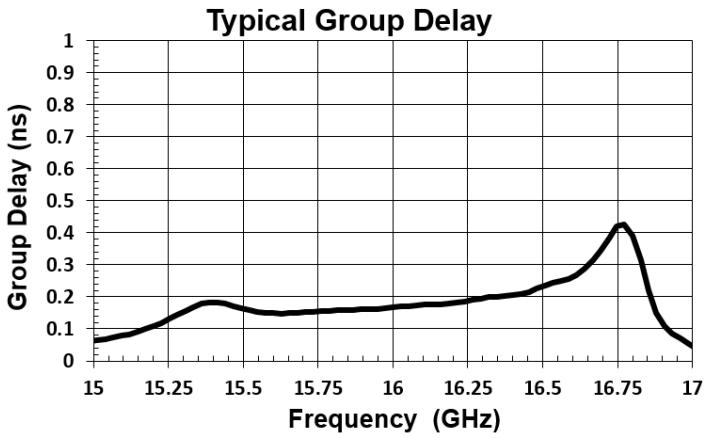


Physical Dimensions

Units = inches

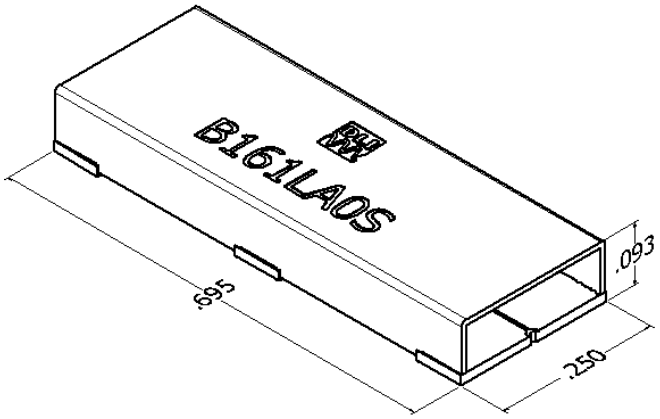


Isometric View

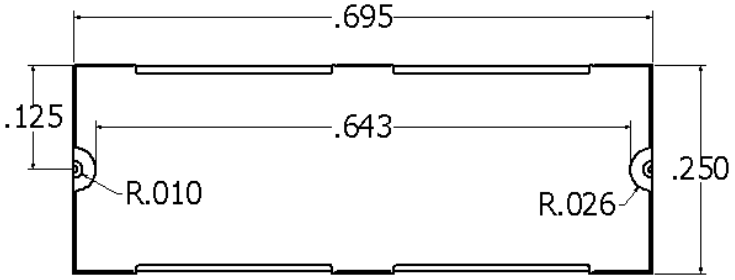

Bottom View

Recommended PCB Layout

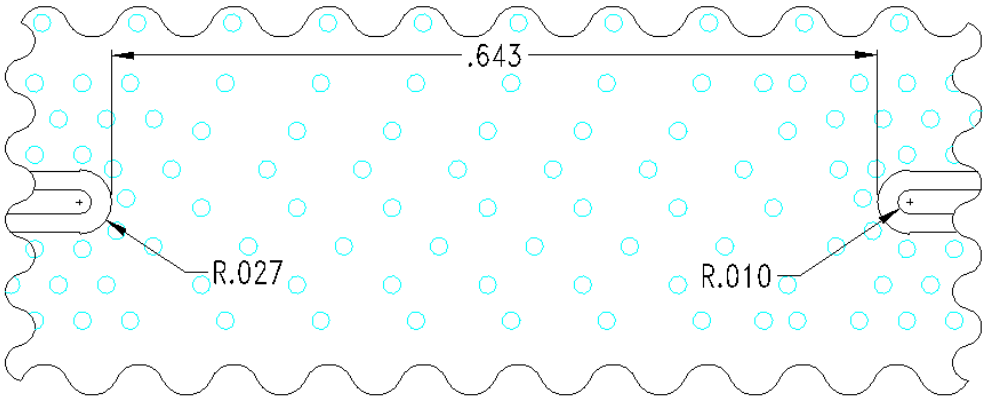

- 50Ω trace dimensions are application specific.
- Ensure adequate grounding beneath the part.

2777 Route 20 East, Cazenovia, NY 13035| Ph.: (315)655-8710 | KCCSales@knowles.com

December 2015