

# Product data sheet

## Characteristics


# 8501XUDO40V63Y414

NEMA Control Relay, Type X, utility, 10A resistive at 600 VAC, 4 normally open contacts, 125 VDC coil, pan head screws

Product availability : Non-Stock - Not normally stocked in distribution facility



Price\* : 390.00 USD

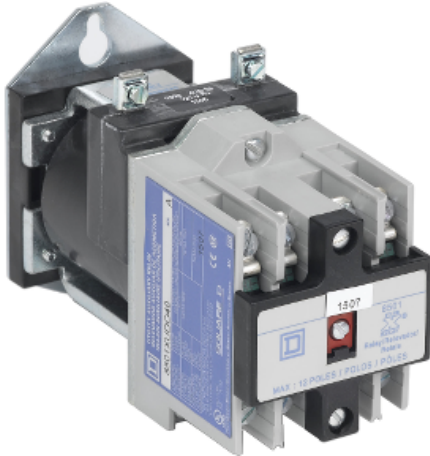

## Main

Range	8501X
Relay Type	Utility
Product	Relay
Current Rating	10 A AC 5 A DC
Contact Configuration	4 NO 4 standard contact cartridges
Number of Poles	4P
Coil Voltage	125 V DC
Voltage Rating	250 V DC
Mounting Type	Panel
Operating Temperature	-40...160 °F (-40...71 °C)
Electrical Connection	Ring tongue
Certifications	UL Listed CE CSA
Operating Time	37 ms - pick-up 21 ms - drop-out
Maximum Height	3.56 in (90.42 mm)
Maximum Width	2.23 in (56.64 mm)
Maximum Depth	5.17 in (131.32 mm)

## Ordering and shipping details

Category	21157 - 8501 XDO (DC)
Discount Schedule	CP2
GTIN	00785901743576

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Aug 31, 2021

Nbr. of units in pkg.	1
Package weight(Lbs)	3.36 lb(US) (1.52 kg)
Returnability	No
Country of origin	MX

### Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>

### Contractual warranty

Warranty	18 months
----------	-----------