
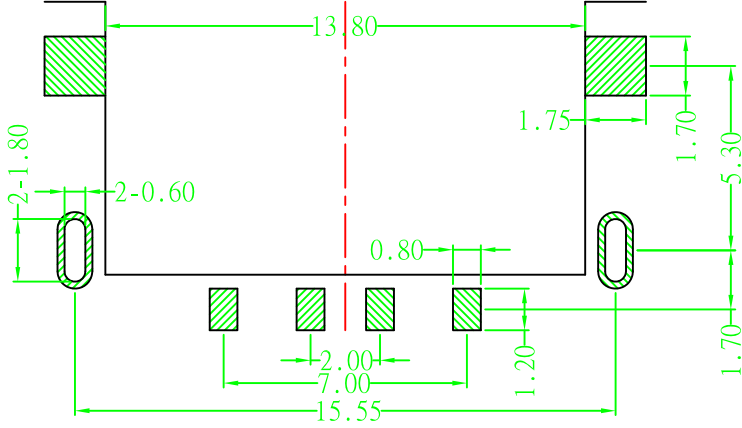
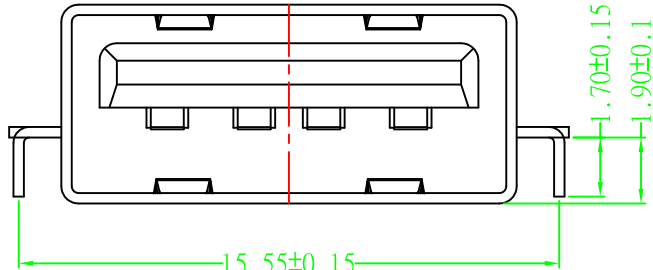
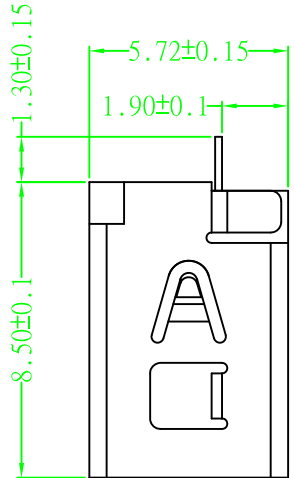


MAPX	MODIFICATION	DATE

Specification:

- 1. Electrical Characteristics:**
 - Dielectric Withstanding Voltage: AC 500V/1MINUTE.
 - Insulation Resistance: 1000 MΩMin.
 - Contact Resistance: 30 mΩ Max.
- 2. Mechanical Characteristics:**
 - INSERTION FORCE: 30N(3.06Kgf) MAX
 - EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)
 - Durability:1500cycles.EXTRACTION FORCE:10~30N(1.02~3.06Kgf)
- 3. Material:**
 - Terminal: C5191/C2680R-EH T=0.20
 - Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;
 - Shell: Bronze, SPCC,H =0.30mm
 - Plating: Nickel underplate 2.54 um Min;
 - Housing: PBT PA9T LCP Black White
- 4. Environmental:**
 - Operating Temperature: 0°C to +85°C.

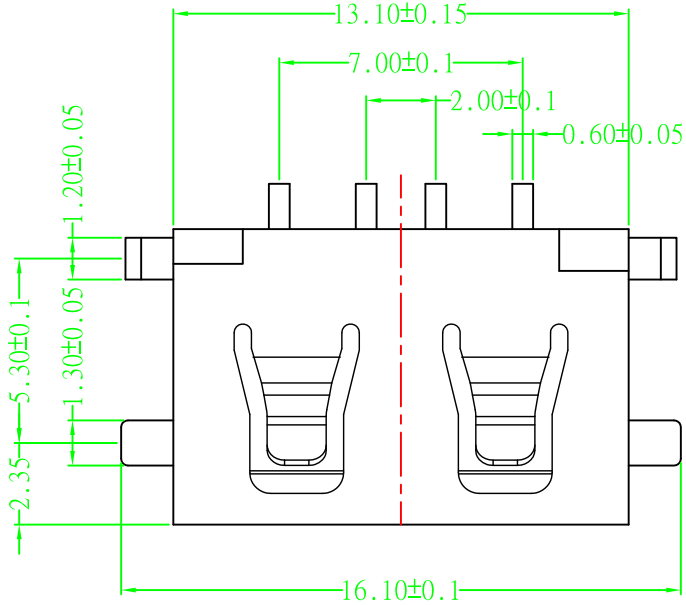

RECOMMENDED P.C.B LAYOUT T=1.0MM

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司						
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	YANG	制图料号 PRODUCT PART NO.		
X.	±0.30	X.	±5°	比例 SCALE	1:1	审核 CHKD	郭志富	产品名称 PRODUCT NAME	短体8.6直边沉板1.9MM	
.X	±0.25	.X	±2°	日期 DATE	2019.11.23	核准 APPD	黄国荣	角法 VIEW	版本 VER	AD
.XX	±0.15	.XX	±1°							
.XXX	±0.10	.XXX	±0.5°							