

KR Electronics, Inc.


General Description

KR 2355-20 is a 20 Hz active notch filters. Other notch frequencies can be specified. Contact factory for details.

Features

- 20 Hz Active notch filter
- 3 dB BW 5 Hz typical
- No adjustments necessary

Typical Performance– Measured

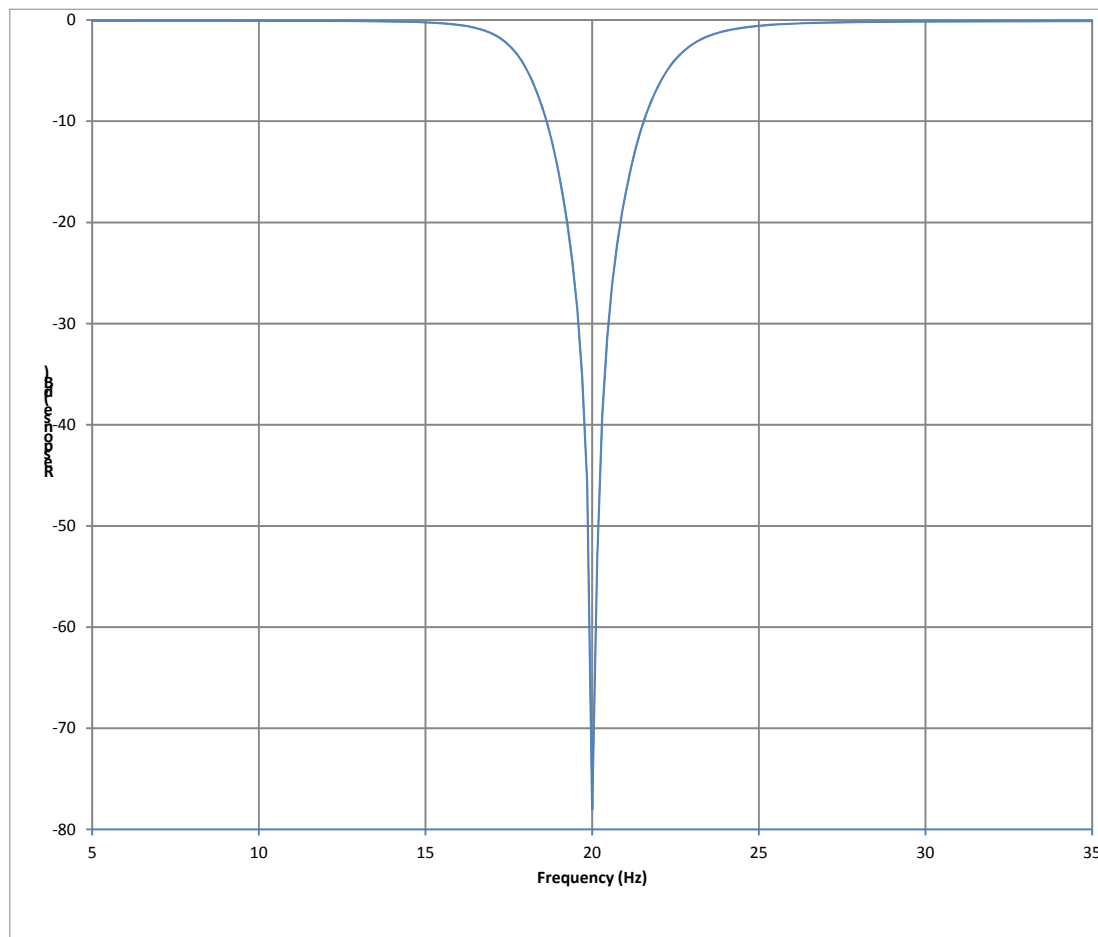


KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics, Inc.


Typical Performance— Measured

REF LEVEL /DIV
0.000dB 5.000dB

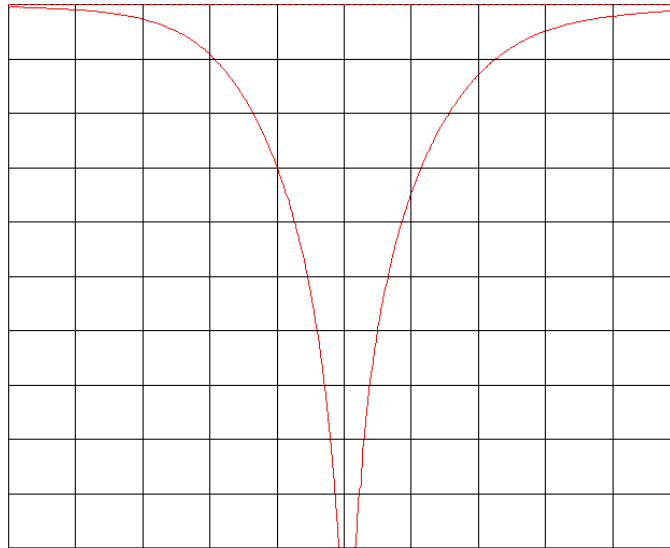

CENTER 20.000Hz SPAN 10.000Hz
AMPD -5.0dBm

REF LEVEL /DIV
0.000dB 1.000dB

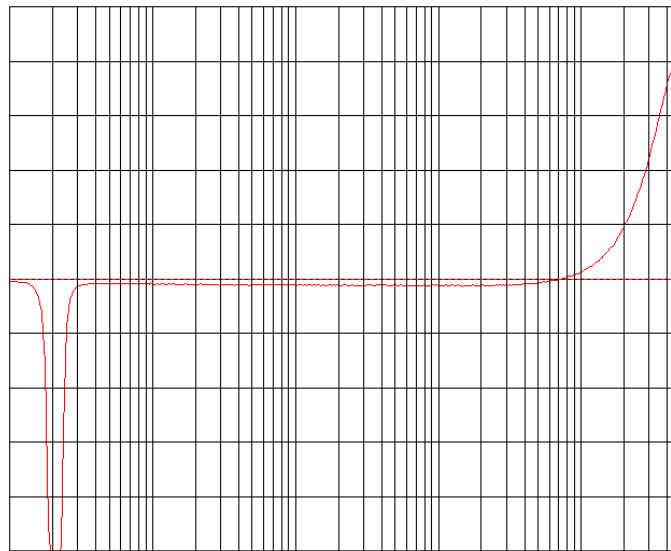

START 10.000Hz STOP 500 000.000Hz

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001




Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics, Inc.

Specifications

Parameter	Specification	
Filter type	Notch	
Notch Frequency (Fo)	20 Hz	
1 dB Bandwidth	10 Hz max 7.5 Hz typical	Upper passband limit to approx. 100 KHz
Typical 3 dB Bandwidth	5 Hz	
Attenuation at 20 Hz	> 40 dB (typically >60 dB)	
Gain	0 dB ± 0.2 dB	
Max Input Voltage	± 8 V	
Supply Voltage	± 15 Vdc	
Supply Current	26 mA max (17.5 mA typ)	
Operating Temperature	0° C to 50° C	

Physical Dimensions

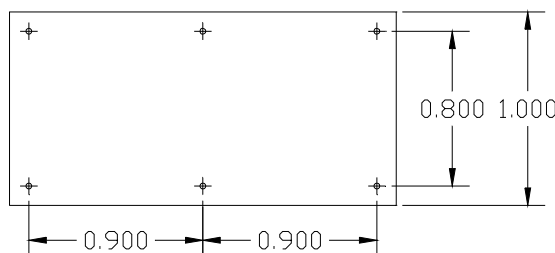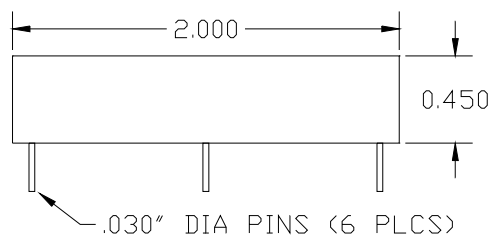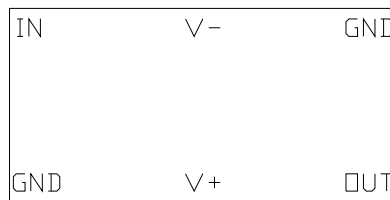

Epoxy Package
All Dimensions in inches

Connect GND to both
signal ground and common
of voltage supply

Power supply internally
decoupled with 0.1 uF
ceramic capacitors

Also available with BNC
Connectors

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982