

## SCREWLESS TYPE TERMINAL BLOCK

 E133988(R)

ETB6E SERIES

SCREWLESS TYPE

PITCH=2.54mm

### FEATURES


- Easy to assemble for any number of positions
- End stackable without any loss of P.C.B. space
- UL 94V-0 grade fire retardant engineering plastic used for the housing
- Be capable of clamping a wide range of wire diameters
- Screwless design can reduce time for connecting wire

### SPECIFICATIONS


- Pitch 2.54mm
- Wire range 26~20 AWG (0.5mm<sup>2</sup>)
- No. of pole per block 2P to 20P
- Rating 6 Amp, 150 VAC
- Housing PA66
- Terminals Tin plated over Copper Alloy
- Springs Stainless Steel
- Push button PA66
- Operating temperature -30°C ~ +110°C  
(includes temperature rise limit)
- Stripping length 9mm
- UL Approval 150V, 6A, 26~20 AWG



### PART NUMBERING SYSTEM

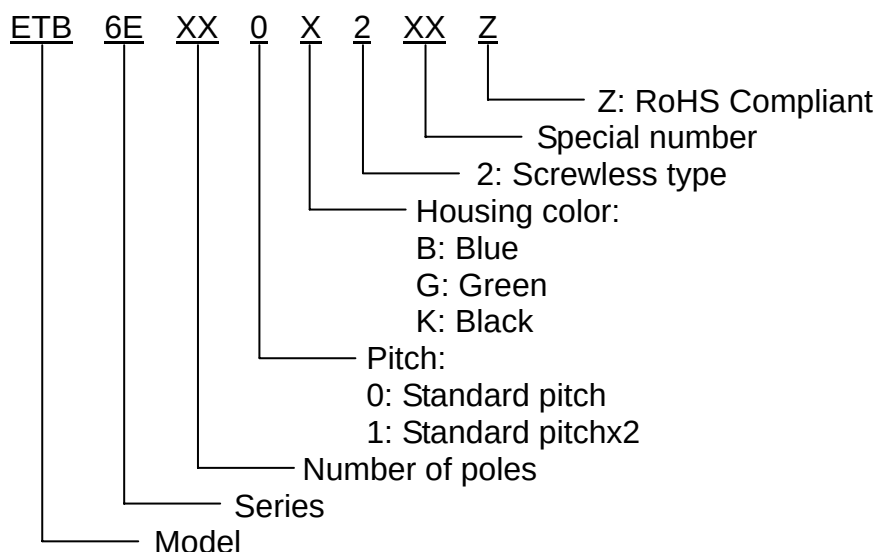

## DRAWING

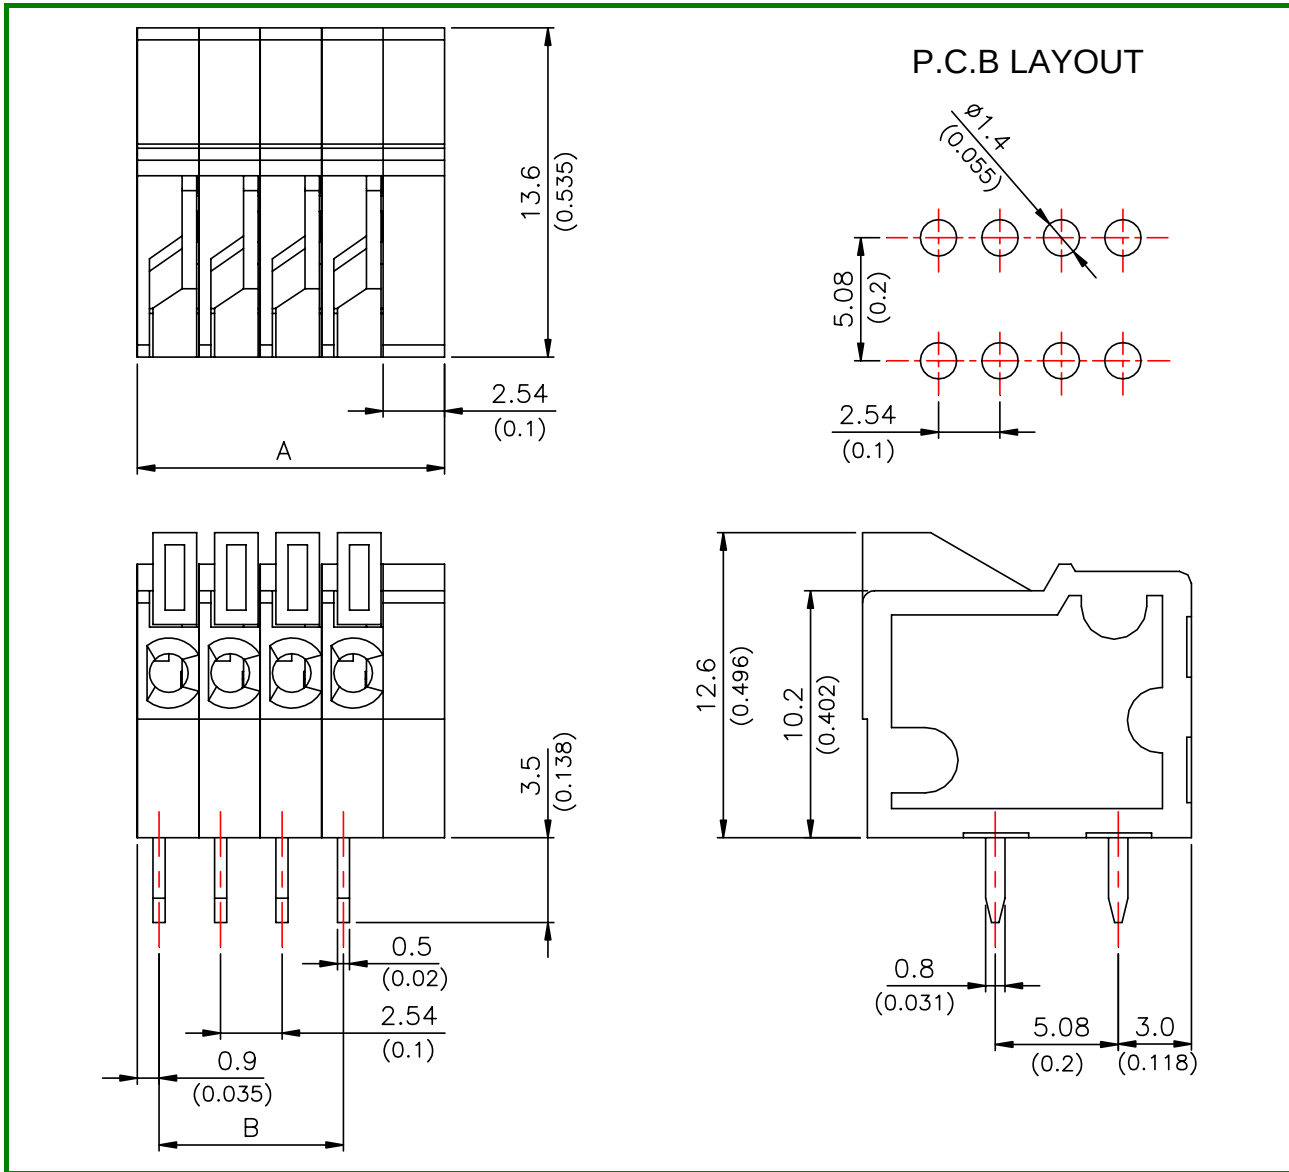

| POLE<br>DIM. | 2                | 3                | 4                | 5                | 6                | 7                | 8                | 9                | 10               | 11               | 12               | 13               |
|--------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| A            | 7.62<br>(0.300)  | 10.16<br>(0.400) | 12.70<br>(0.500) | 15.24<br>(0.600) | 17.78<br>(0.700) | 20.32<br>(0.800) | 22.86<br>(0.900) | 25.40<br>(1.000) | 27.94<br>(1.100) | 30.48<br>(1.200) | 33.02<br>(1.300) | 35.56<br>(1.400) |
| B            | 2.54<br>(0.100)  | 5.08<br>(0.200)  | 7.62<br>(0.300)  | 10.16<br>(0.400) | 12.70<br>(0.500) | 15.24<br>(0.600) | 17.78<br>(0.700) | 20.32<br>(0.800) | 22.86<br>(0.900) | 25.40<br>(1.000) | 27.94<br>(1.100) | 30.48<br>(1.200) |
| POLE<br>DIM. | 14               | 15               | 16               | 17               | 18               | 19               | 20               |                  |                  |                  |                  |                  |
| A            | 38.10<br>(1.500) | 40.64<br>(1.600) | 43.18<br>(1.700) | 45.72<br>(1.800) | 48.26<br>(1.900) | 50.80<br>(2.000) | 53.34<br>(2.100) |                  |                  |                  |                  |                  |
| B            | 33.02<br>(1.300) | 35.56<br>(1.400) | 38.10<br>(1.500) | 40.64<br>(1.600) | 43.18<br>(1.700) | 45.72<br>(1.800) | 48.26<br>(1.900) |                  |                  |                  |                  |                  |