

REV	DATE	ECO#

DRAWING NOT TO SCALE
ALL DIMENSIONS IN INCHES

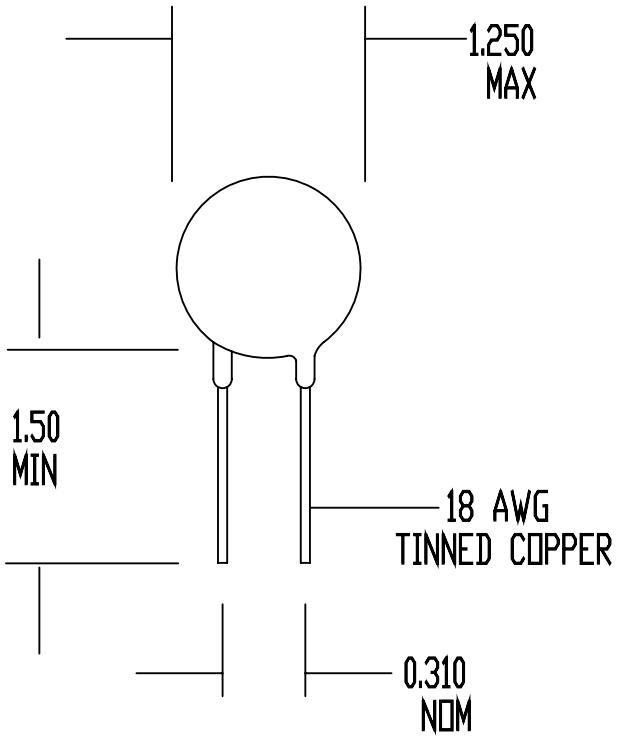

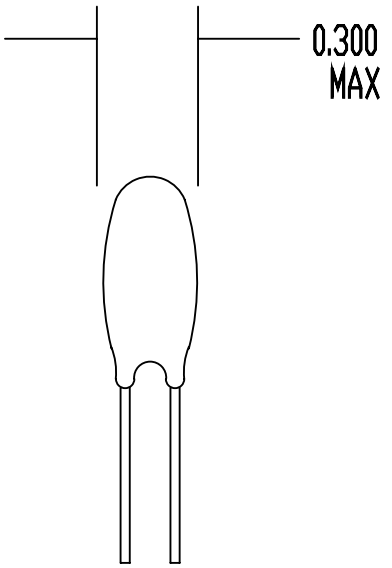

SPECIFICATIONS:

RESISTANCE AT 25 DEG C = 2 OHMS +/- 25%
MAXIMUM CONTINUOUS CURRENT (Imax) = 23 AMPS
RESISTANCE AT Imax = 0.025 OHMS NOMINAL
MAXIMUM VOLTAGE RATING = 265 VAC (RMS)
MAXIMUM SURGE RATING = 250 JOULES
ENCAPSULATION = SILICONE RESIN
MARKING = OPTION
LEADS = RODAN P/N STL209-50

DRAWN BY F. TISEO		AMETHERM Circuit Protection Thermistors
DATE 7/14/92		
REV NONE	APP	SURGE-GARD INRUSH CURRENT LIMITER
SHEET 1 OF 1		SG420