

MEDER electronic
Products for tomorrow...

Europe: +49 / 7731 8399 0 | Email: info@meder.com
USA: +1 / 508 295 0771 | Email: salesusa@meder.com
Asia: +852 / 2955 1682 | Email: salesasia@meder.com

Item No.:
9523711054
Item:
LS02-1A66-S-500W
stainless steel

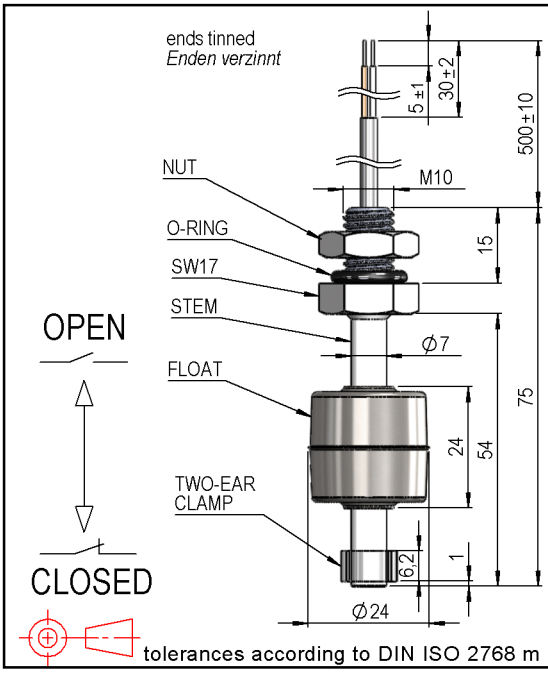



CABLE
round cable LIYY 2x0,14 mm², grey
colour of wires: white and brown
Rundkabel LIYY 2x0,14 mm², grau
Aderfarben: weiss und braun

MATERIALS
nut-stainless steel A2, DIN 439, low form
stem-stainless steel 4003000109
float-stainless-steel 2500000029
two-ear clamp-stainless steel 4003007068
O-ring- NBR, black
Mutter-Edelstahl A2, DIN 439, niedrige Form
Schaft-Edelstahl 4003000109
Schwimmer-Edelstahl 2500000029
Zweiohrklemme-Edelstahl 4003007068
O-Ring-NBR, schwarz

Special Product Data	Conditions	Min	Typ	Max	Unit
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
Switching voltage	DC or Peak AC			180	V
Carry current	DC or Peak AC			1,25	A
Switching current	DC or Peak AC			0,5	A
Sensor-resistance	measured with 40% overdrive			320	mOhm
Material of float		stainless steel			
Housing material LS		stainless steel			
Sealing compound		Polyurethan			

Environmental data	Conditions	Min	Typ	Max	Unit
Operating temperature	cable not moved	-30		80	°C
Operating temperature	cable moved	-5		80	°C
Storage temperature		-30		80	°C
Safety class	DIN EN 60529	IP68			

Cable specification	Conditions	Min	Typ	Max	Unit
Cable type		round cable			
Cable material		PVC			
Cross section		0,14 sq-mm			

General data	Conditions	Min	Typ	Max	Unit
Mounting advice		over 5m cable, a resistor is recommended.			
Tightening torque				0,5	Nm

Modifications in the sense of technical progress are reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Standex Electronics:

LS02-1A66-S-500W