
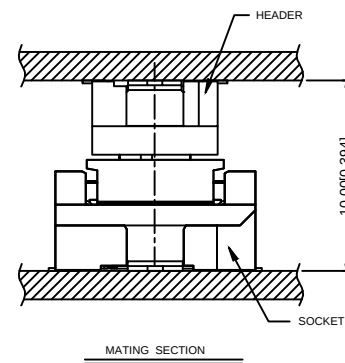

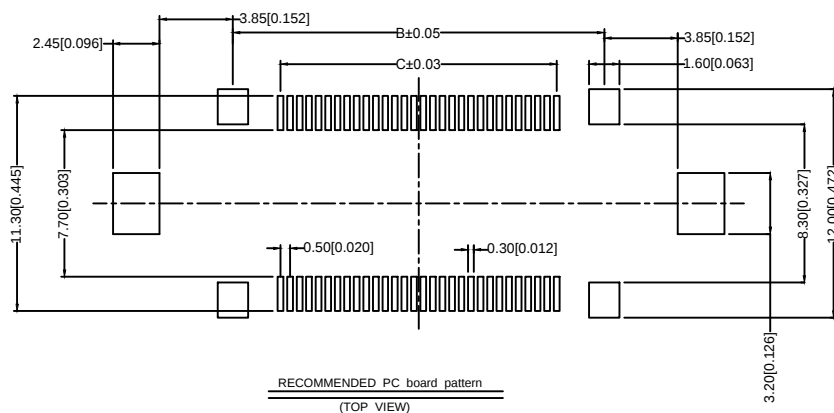
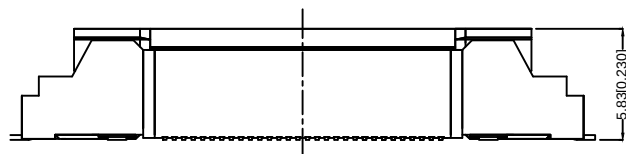


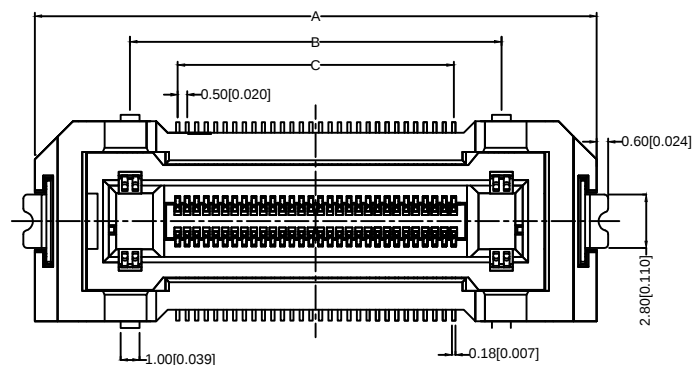

Specifications:

Voltage rating:30V AC/DC
30V AC/DC
Current rating:0.5A AC/DC
0.5A AC/DC
Withstanding voltage:150V AC/minute
150V AC/
Temperature range:-35 +85
-35 +85
Insulation resistance:≥1000MΩ
≥1000MΩ
Contact resistance:≤55mΩ
≤20mΩ
After environmental testing:≤40mΩ
≤40

X0512 F V S-XX X X S- LP V01
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- 1.Series No
- 2.Category:F-Female
- 3.Welding Board Angle:V-Straight 180°
- 4.Welding Way:S-SMT
- 5.Row No-Pin No:XXP
- 6.Female Height:A:5.83mm;
- 7.Male Height:D:4.17mm;
- 8.speclal No:S-With positioning Column
- 9.Material:LP-LCP
- 10.Metal plating:Gold Flash

MATED HEIGHT
X0512FVS-XXXXS-LPV01
Single high
X0512FVS-XXXXS-LPV01

PIN	A	B	C
20	19.50	9.50	4.50
30	22.00	12.00	7.00
40	24.50	14.50	9.50
50	27.00	17.00	12.00
60	29.50	19.50	14.50
80	34.50	24.50	19.50
100	39.50	29.50	24.50
120	44.50	34.50	29.50

								DSND		SCALE: N/A	MODEL TYPE:				
						ANGLAR	±5°		DWN		VIEW: 	PART NO.:			
ΔX						L≤ 4	±0.2		CHKD		UNIT: mm/in	0.50mm Style Connectors			
ΔX						4<L≤ 16	±0.3					DWG NO.:			
ΔX						16<L≤ 63	±0.4					X0512FVS-XXXXS-LPV01			
MARK	DESCRIPTION	DATE	REVISED	APPROVED		L> 63	±0.5		APPD		SIZE: A4				
							UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn														1/1	A0