


1. Mechanical Dimensions:

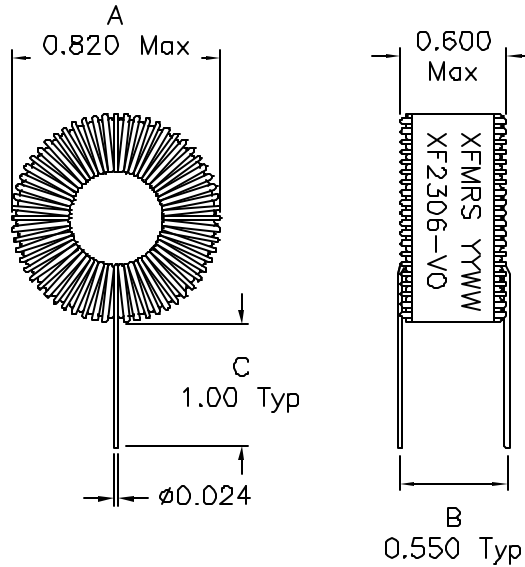


Notes:

1. Solderability: Leads shall meet MIL-STD-202C, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component
10. the tinned length is the same as the lead length.

DOC. REV. A/1

2. Schematic:



Kool Mu Core Material

3. Electrical Specifications:

OCL: 230uH±15% @75KHz 0.1V
 OCL: 150uH Typ @75KHz 0.1V, 2.0Adc
 DCR: 0.120 Ohms Max

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc. www.XFMRS.com		Title: Toroid Inductor	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: XF2306-VO	REV. A	
	DWN. 李小锋	Sep-27-06	
SHEET 1 OF 1	CHK. 廖玉坤	Sep-27-06	
	APP. BW	Sep-27-06	