



SHEET 1 OF 1




CIRCUIT: SPST ▲

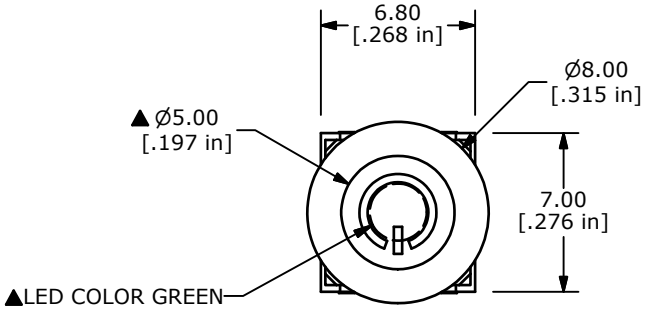


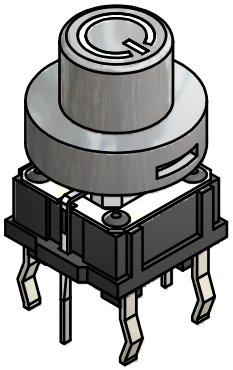


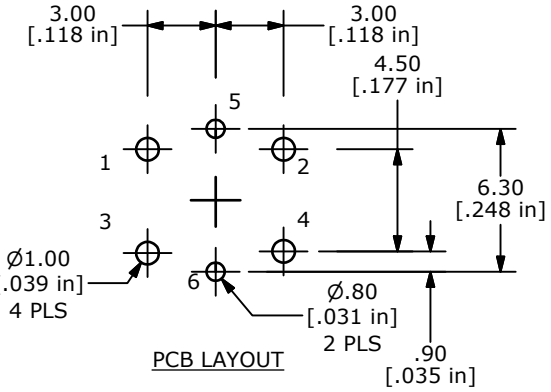

PCB LAYOUT

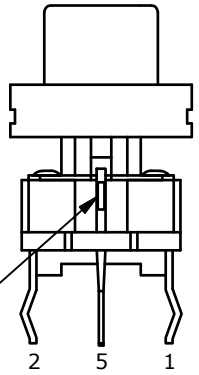

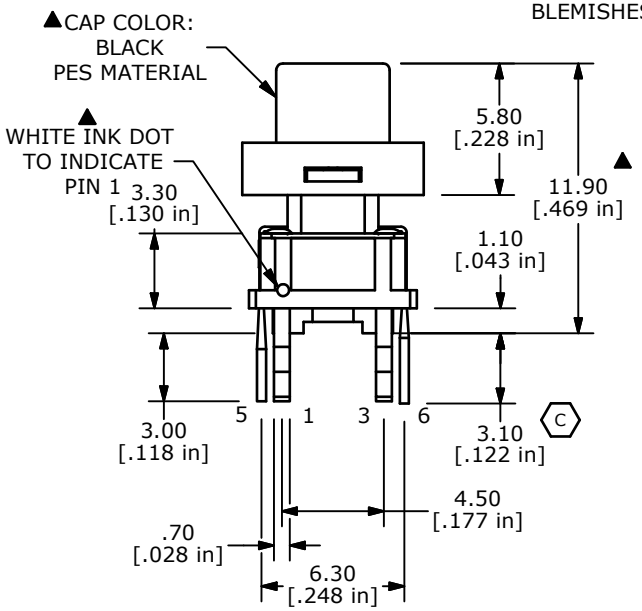

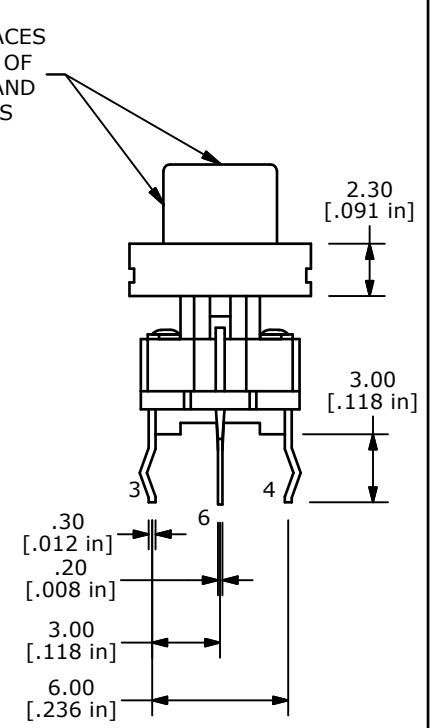

NOTES:
1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. RATING: 50mA, 12VDC
▲ 4. TRAVEL: 0.2 ±0.1
5. OPERATING FORCE: 160±50gf
6. CONTACT RESISTANCE: 100m-Ohms MAX
7. CONTACT MATERIAL: SILVER
8. OPERATING LIFE: 500,000 CYCLES
9. INSULATION RESISTANCE: 100M-Ohms MIN
10. DIELECTRIC STRENGTH: 500VDC FOR 1 MINUTE
▲11. LED COLOR: GREEN
12. OPERATING TEMPERATURE: -20° C TO 70° C
13. 2002/95/EC (ROHS) COMPLIANT
14. ▲DENOTES CRITICAL PARAMETER

▲ LED SPECS	UNITS	GREEN LED
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	2.1 TYP. - 2.5 MAX
LUMINOUS INTENSITY	mcd	800 TYP.

REV	PCR NO	DESCRIPTION	DATE	BY
E	20196	ADD SURFACE NOTE	10/05/11	BGL
D	20065	CORRECT GRAPHICS ORIENTATION	07/19/11	BMA
C	20002	ADD DOT MARKINGS & DIM WAS 5.0	6/14/11	BGL

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE TL1265GQSBLK-PWR

SCALE	DATE	DR	DWG	REV
3:1	1/12/2011	BA	B200022	E