


NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD74-0000.
2. MATERIAL SPECIFICATIONS: BRASS PER ASTM B16.
3. FINISH SPECIFICATIONS:
.000030 MIN. GOLD PER ASTM B488 OVER .000050 MIN. NICKEL PER AMS QQ-N-290.
4. ELECTRICAL SPECIFICATIONS:
CURRENT RATING: 20 AMPS
5. SUGGESTED FOR USE WITH 14 GA WIRE OR EQUIVALENT.
6. REFER TO CAP10-01 FOR CABLE ASSEMBLY PROCEDURE.

REV	DESCRIPTION	BY DATE	APPD
E	REVISED PER ER11418	DAO 01/07/09	DAO

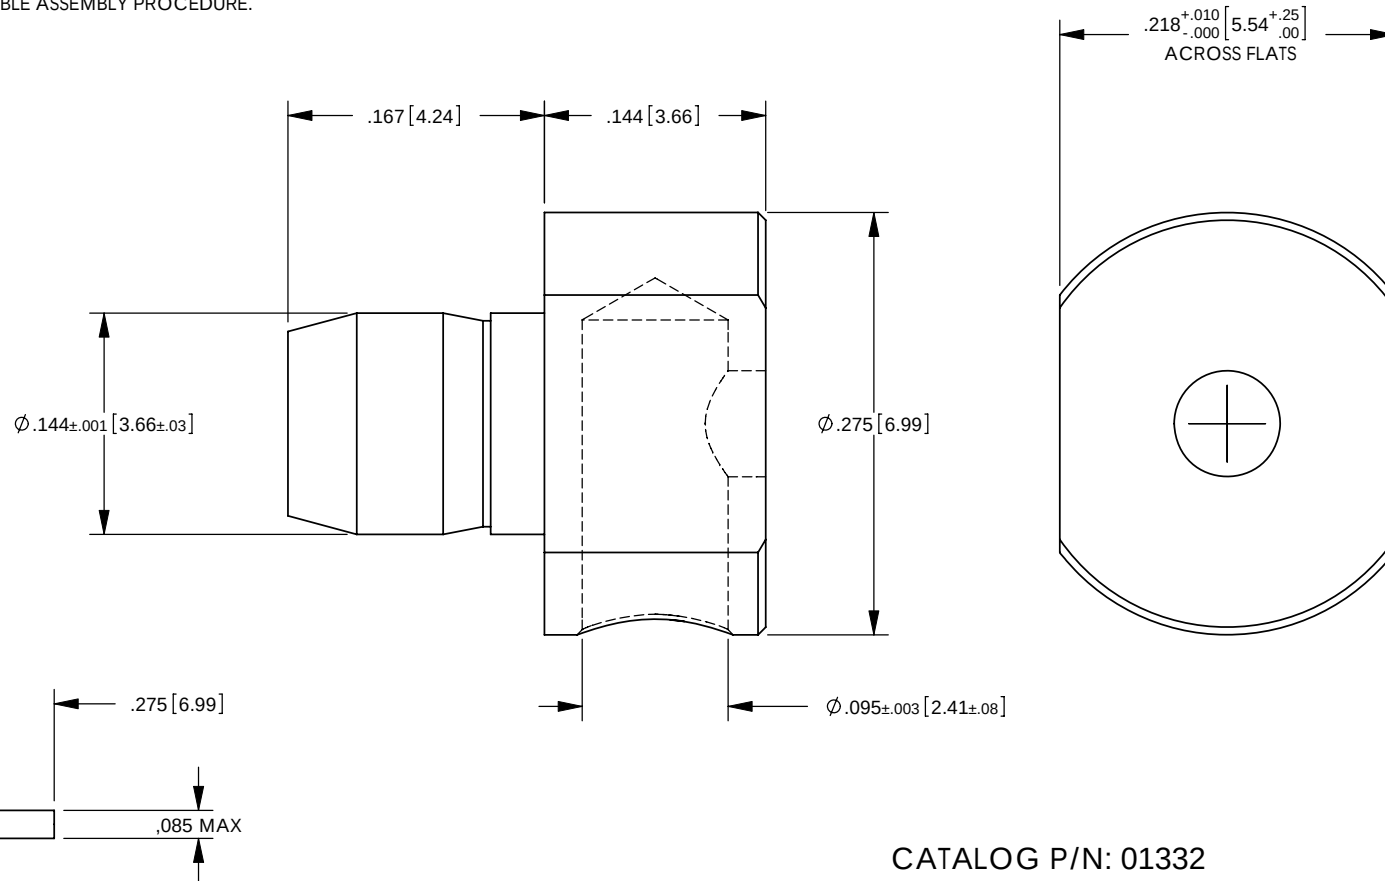

RECOMMENDED CABLE TRIM DIMENSIONS
SCALE: 2:1

CATALOG P/N: 01332

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 8:1				WINCHESTER Winchester Electronics Corporation ELECTRONICS 62 Barnes Industrial Road North Wallingford, Connecticut 06492			
CUSTOMER SALES DRAWING				POWERSNAP RIGHT ANGLE SOLDER MOUNT 14 AWG, 20 AMP			
DRAWN KJT	DATE 01/31/02	APPROVED JWH	DATE 02/01/02	A SD01332 SHT OF REV 1 1 E			
APPROVED JEM	DATE 02/01/02	APPROVED JED	DATE 02/01/02				