


COM Express Carrier Board



Features

- Supports COM Express Basic Module, Pin-out Type II
- VGA/ LVDS/ TV-out Connector
- RJ-45 x 2
- CompactFlash™ Type II Slot x 1
- PCI-Express [x16] Slot x 1, PCI-Express [x1] Slot x 1/ PCI Slot x 1
- ExpressCard Slot x 1/ Mini PCI Slot x 1
- SATA Port x 1
- USB Port x 6/ COM Port x 4
- ATX Power Input

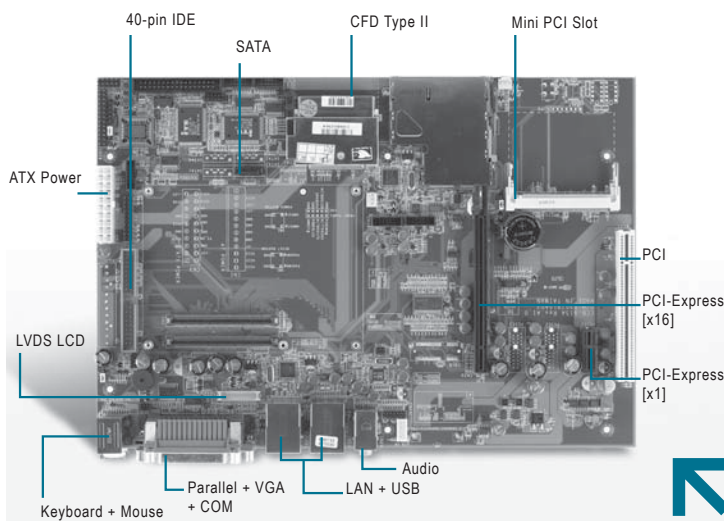

Specifications

System	
Form Factor	ATX
I/O Chipset	ITE IT8712
Ethernet	RJ-45 x 2 Marvell® 88E8053, GbE x 1 on ECB-915A
Expansion Interface	PCI-Express [x16] slot x 1 PCI-Express [x1] slot x 1 ExpressCard slot x 1 PCI slot x 1 Mini PCI slot x 1
Power Supply Type	ATX
Board Size	12" (L) x 8.27" (W) (305 mm x 210 mm)
Gross Weight	1.32 lb (0.6 Kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	90,000
Display	
VGA	DB15 Connector x 1
LVDS	Dual channel LVDS connector (15x2-pin) x 1
TV-out	8-pin (4 x 2) box header, for S-Video and composite video
I/O	
Storage	PATA x 1, SATA x 1, Floppy Disk Drive x 1, CompactFlash™ Type II slot x 1
Serial Port	RS-232 x 3, RS-232/422/485 x 1
Parallel Port	SPP/ EPP/ ECP mode
USB	6
PS/2 Port	Keyboard x 1, Mouse x 1
Digital I/O	Supports 8-bit (Programmable)
IrDA	One IrDA Tx/Rx header
Audio	Mic-in, Line-in, Line-out

Packing List

- Quick Installation Guide
- Utility CD
- ECB-915A

Ordering Information

- **TF-ECB-915A-A10**
COM Express Carrier Board, For 10/100Base-TX + GbE, Rev.A1.0
- **TF-ECB-915A-A10-01**
COM Express Carrier Board, For Dual GbE, Rev.A1.0
- **TF-SKC-1111-000**
Starter Kit, for COM Express Module, w/ COM-915-B10 & ECB-915A-A10-01