

1. Mechanical Dimensions:

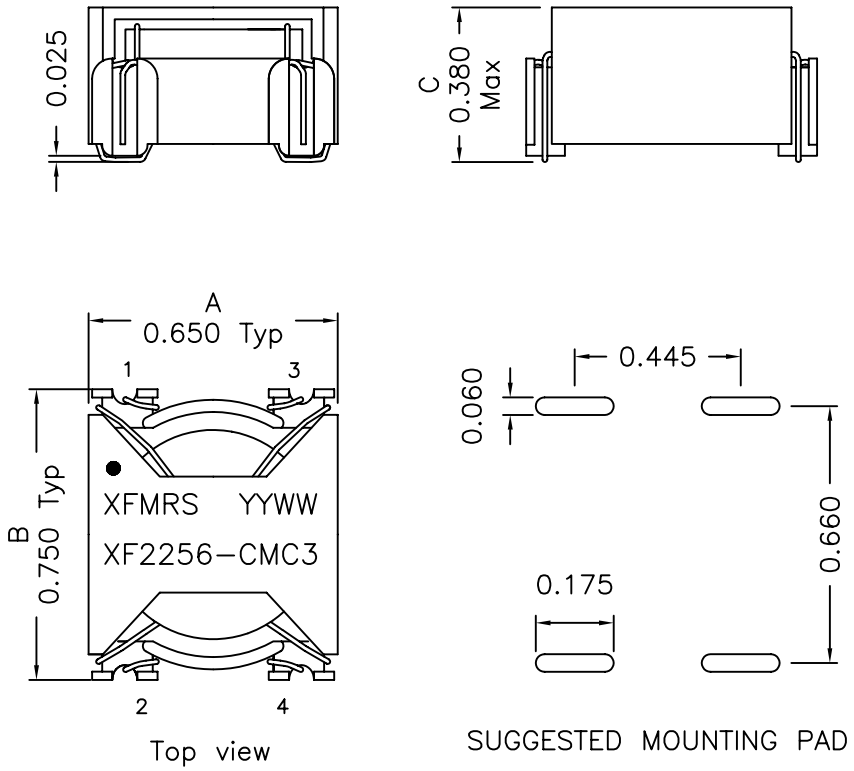

2. Schematic:

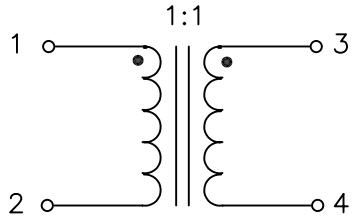

3. Electrical Specifications:

OCL: 225uH±25% @10KHz 1.0V

Q: 4 Min @10KHz 1.0V

DCR: 0.060 Ohms Max

Rated Current: 3.3A (Based on a 55°C Temp Rise)

TURNS RATIO: Pins (1-2):(3-4)=1:1±5%

HIPOT: 500Vac, Wdg to Wdg


Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

DOC. REV: B/3

XFMRS Inc. www.XFMRS.com	Title: Common Mode Choke		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF2256-CMC3		REV. B
	DWN.	Feng	May-12-12
	CHK.	YK Liao	May-12-12
SHEET 1 OF 2	APP.	BW	May-12-12

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

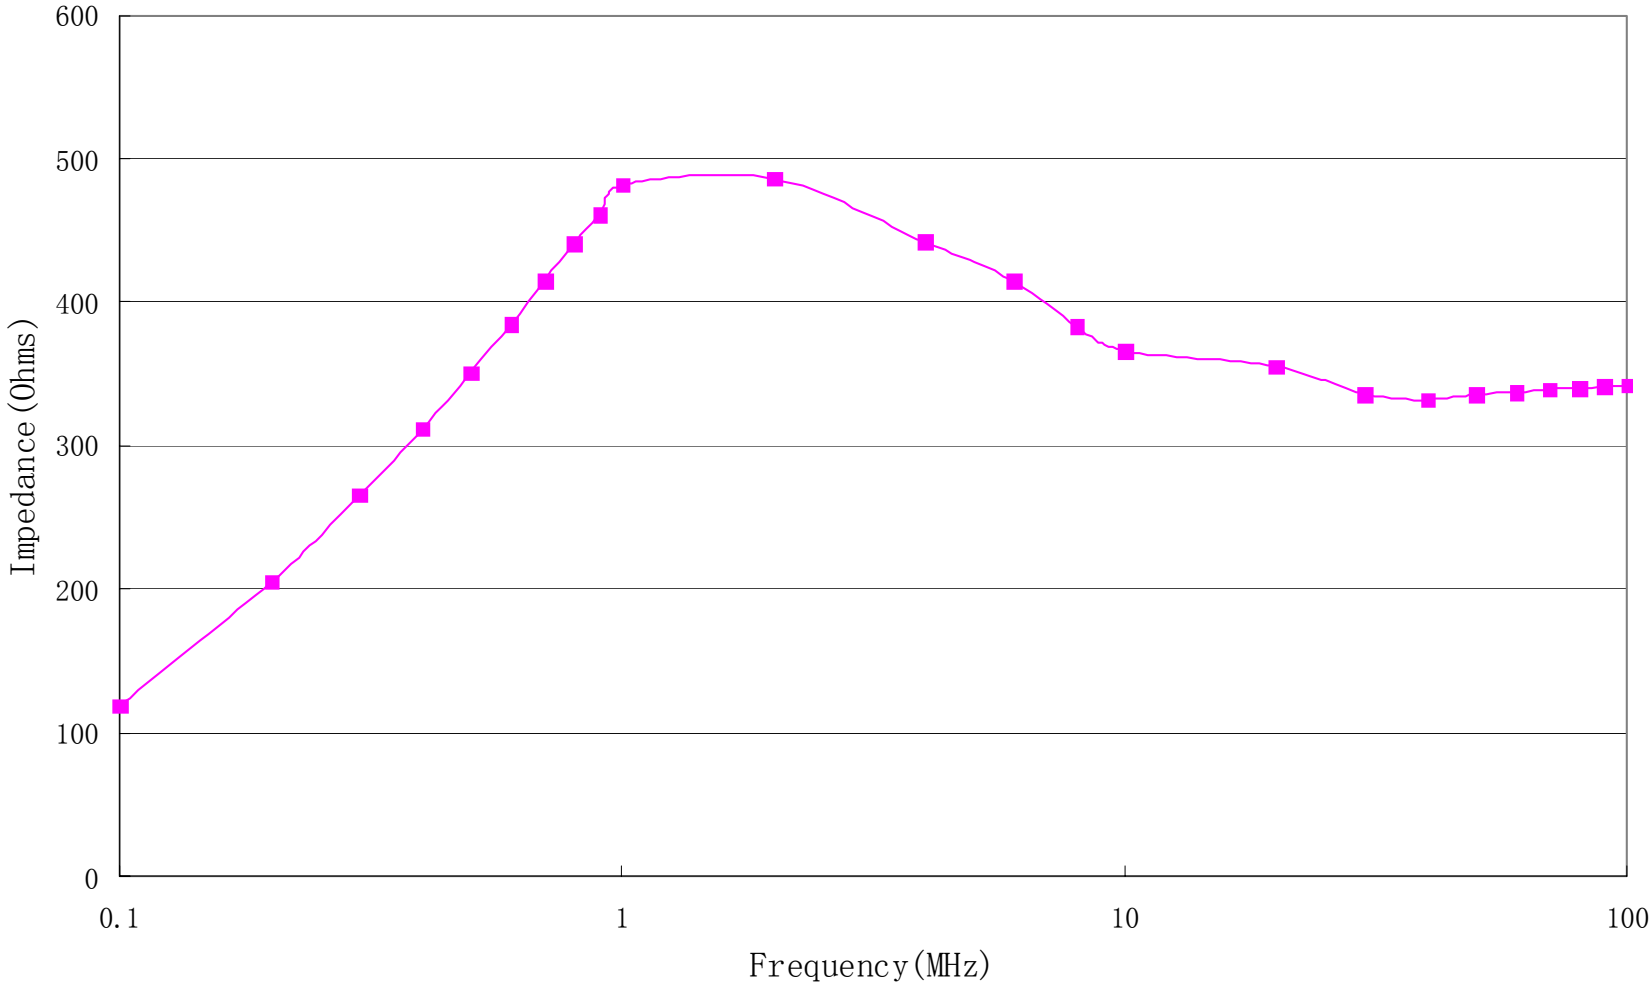

DOC. REV: B/3

XFMRS Inc. www.XFMRS.com	Title: Common Mode Choke		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF2256-CMC3		REV. B
	DWN.	Feng	May-12-12
	CHK.	YK Liao	May-12-12
SHEET 2 OF 2	APP.	BW	May-12-12

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.