Zilog Z80180 68-Pin PLCC-to-64-Pin DIP

FEATURES

- Replace difficult-to-obtain PLCC devices with common DIP packages.

GENERAL SPECIFICATIONS

- PCB: FR-4, 0.062 [1.56] or 0.094 [2.39] thick
- MALE PIN: Brass 360 1/2-hard per UNS C36000, ASTM B16/B16M
- OPERATING TEMPERATURE: 221°F [105°C]
- MALE PIN PLATING: 200µ [5.08µ] Sn/Pb 93/7 per ASTM B579-73 over 100µ [2.54µ] Ni per SAE-AMS-QQ-N-290

MOUNTING CONSIDERATIONS

- Mounts in socket or 0.028 dia. [0.711] thru hole standard HASL PLCC pads on top of adapter

Image N/A

CUSTOMIZATION: In addition to the standard products shown on this page, Aries specializes in custom design and production. Special materials, platings, sizes, and configurations can be furnished, depending on the quantity. **NOTE**: Aries reserves the right to change product general specifications without notice.

ALL DIMENSIONS: INCHES [MILLIMETERS]

ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED


CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

ORDERING INFORMATION

P/N 1109477 68-Pin PLCC-to-64-Pin DIP

P/N 1109477-P Panelized Form

SHOWN WITH CHIP MOUNTED

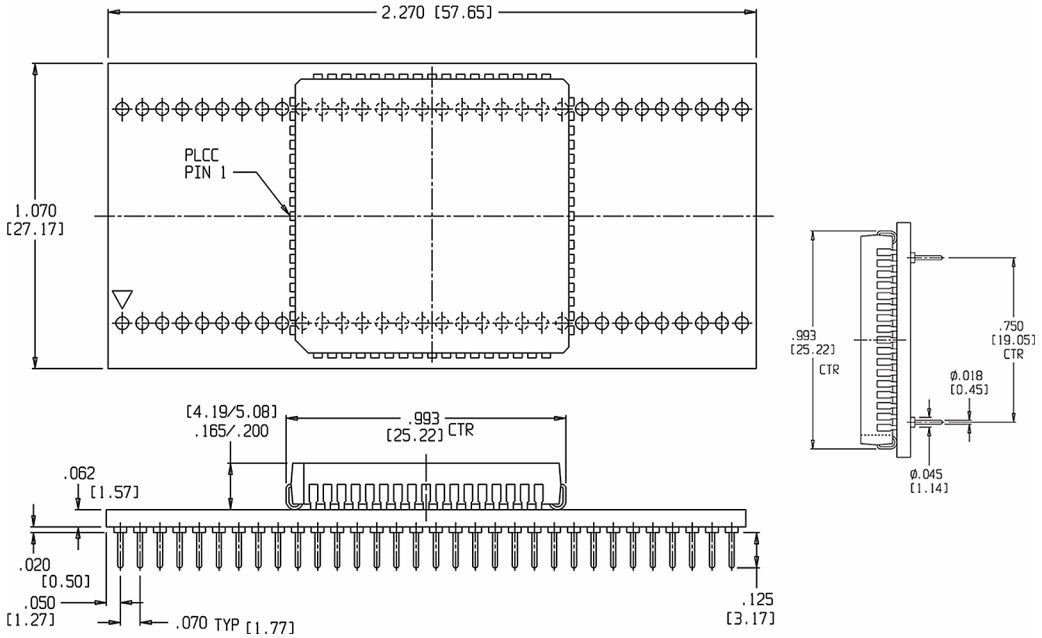

ARIES ELECTRONICS, INC.

Bristol, PA 19007-6810 USA
TEL (215) 781-9956 • FAX (215) 781-9845
WWW.ARIESELEC.COM • INFO@ARIESELEC.COM

PRINTOUTS OF THIS DOCUMENT MAY BE OUT OF DATE AND SHOULD BE CONSIDERED UNCONTROLLED