



# DB ELECTRO<sup>CO., LTD.</sup>

Présente / Presents:

NINGBO HUAGUAN ELECTRONICS CO., LTD.





60×40×22

# NE720



CQC 03001003498

Patent No.: 200420082274.1

### Features

- Magnet latching relay.
- High sensitivity & reliability.
- Well anti-shock and anti-vibration.
- Heavy contact load.

### Ordering Information

**NE720** A Z DC12V  
1 2 3 4

1 Part number: NE720  
2 Contact arrangement: A:1A; B:1B

3 Enclosure: Z: Dust cover  
4 Coil rated voltage(V): DC:6,12, 24

### Contact Data

Contact Arrangement	1A (SPSTNO) , 1B (SPSTNC)		
Contact Material	AgSnO <sub>2</sub>		
Contact Rating(resistive)	100Amax/240VAC		
Max. Switching Power	23000VA(COSΦ=1)	2300VA(COSΦ=0.4)	
Max. Switching Voltage	400VAC	Max. Switching Current:100A	
Contact Resistance or Voltage drop	<1mΩ	Item 3.12 of IEC255-7	
Operation life	Electrical	10 <sup>4</sup>	Item 3.30 of IEC255-7
	(Rated load) Mechanical (No load)	10 <sup>6</sup>	Item 3.31 of IEC255-7

### Coil Parameter

Dash numbers	Coil rated voltage VDC	Coil resistance Ω ±10%	Switching voltage VDC (<80% of rated voltage)	Operating voltage range VDC	Pulse magnitude ms	Coil power consumption W	Operate Time ms	Release Time ms
2 COIL								
006-4500	6	2×8	<4.8	4.9~10	>36	4.5	<12	<6
012-4500	12	2×32	<9.6	9.8~20				
024-4500	24	2×130	<19.2	19.7~40				
1 COIL								
006-2250	6	16	<4.8	4.9~10	>36	2.25	<12	<6
012-2250	12	64	<9.6	9.8~20				
024-2250	24	260	<19.2	19.7~40				

**CAUTION:** 1.When latching relays are installed in equipment, the latch and reset coil should not be pulsed simultaneously. Coil should not be pulsed with less than the nominal coil voltage and pulse width should be a minimum of three times the specified operate time of the relay. If these conditions are not followed, it is possible for the relay to in be the magnetically neutral position .  
2.Switching voltage is for test purpose only and are no to be used as design criteria.

### Operation condition

Insulation Resistance	1000MΩ min (at 500VDC)	Item 7 of IEC255-5
Dielectric Strength	50Hz 2000V surge Voltage2kV	Item 6 and 8 of IEC255-5
Between contact and coil	50Hz 4000V surge Voltage 12kV	Item 6 and 8 of IEC255-5
Creepage distance	8.4mm	Addenda B of IEC255-5
Shock resistance	Functional 100m/s <sup>2</sup> ;Survival:1000 m/s <sup>2</sup> 11ms	IEC68-2-27 Test Ea
Vibration resistance	10~55Hz Double amplitude 1.5mm	IEC68-2-6 Test Fc
Terminals strength	5N; 2.5N • m	IEC68-2-21 Test Ua1and Ud
Solderability	235℃ ±2℃ 3±0.5s	IEC68-2-20 Test Ta method 1
Ambient Temperature	-25~70℃	
Relative Humidity	85% (at 40℃)	IEC68-2-3Test Ca
Mass	82g	

### Qualification inspection:


Perform the qualification test as specified in the table IV of IEC255-19-1 and minimum sample size 24.

### Safety approvals

Safety approval	CQC
Load	100A/220VAC

### Dimensions

mm /inch

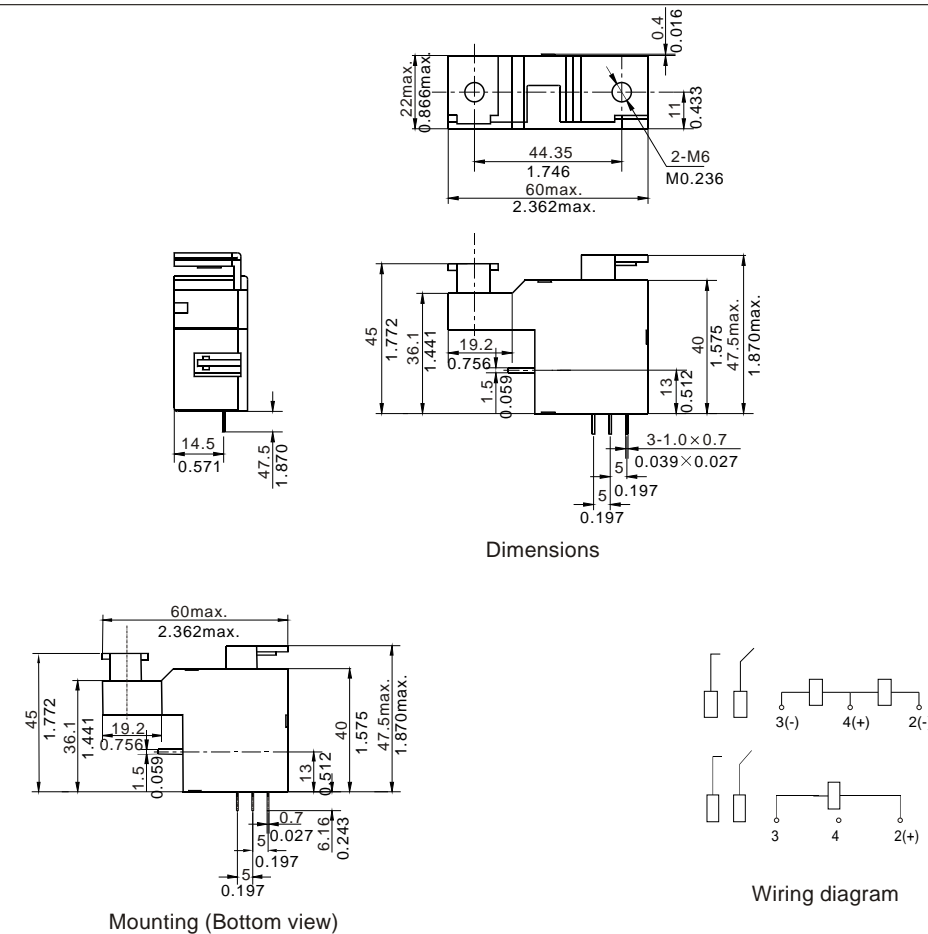

NOTES 1).Dimensions are in millimeters.  
2).Inch equivalents are given for general information only.  
3).Relays shall have plus(+) or plus(+) and minus(-) signs placed on the circuit diagram as shown.