




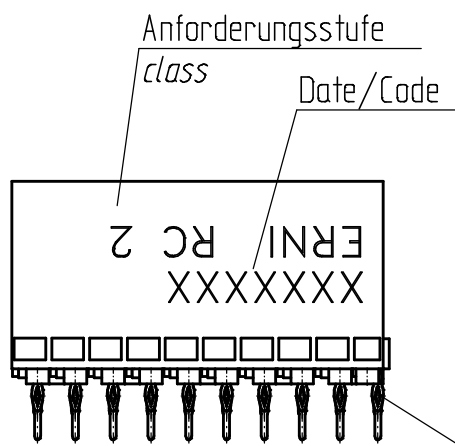



EN-Zone für durchkontaktierte Löcher $\varnothing 0.6 \pm 0.05$
compliant zone for through hole $\varnothing 0.6 \pm 0.05$

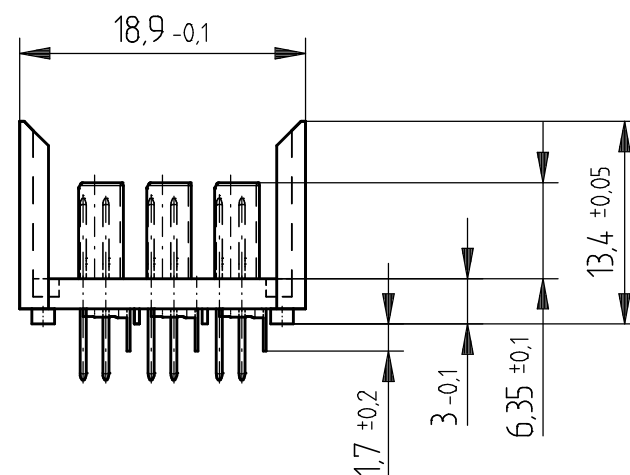


Kontaktversionen, Messerkontakte
Contact Selection Options, Male Contacts

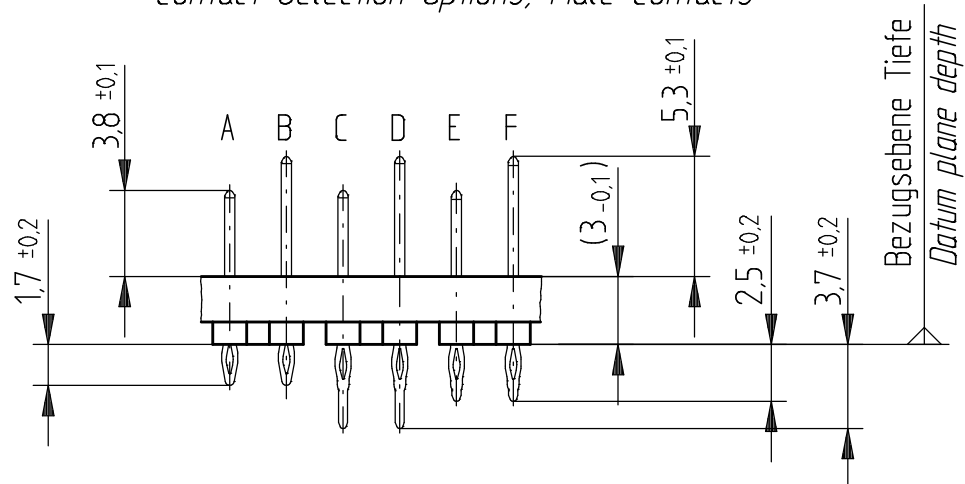


Kontaktversionen, Schirmmesser
Contact Selection Options, Shielding Contacts

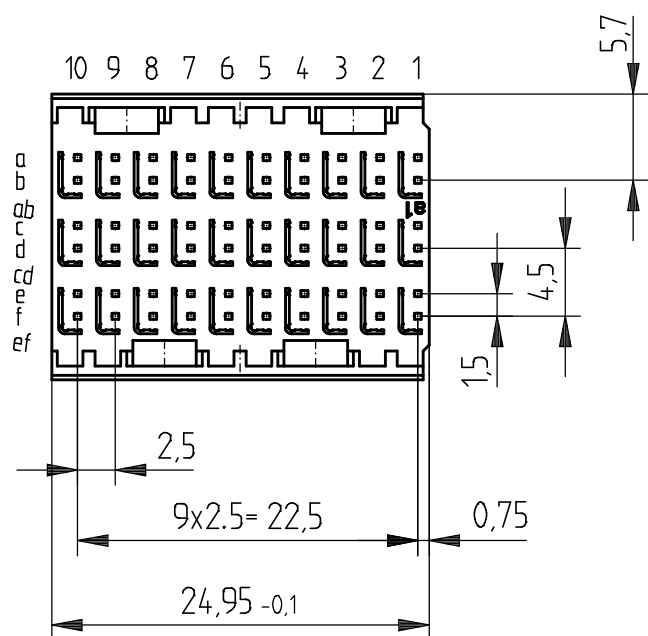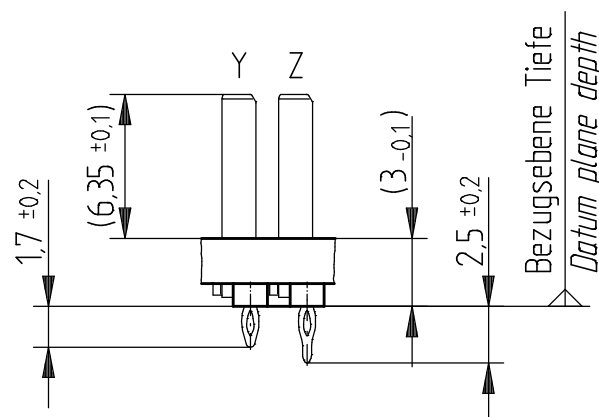

Bestückungsplan - *contact layout*

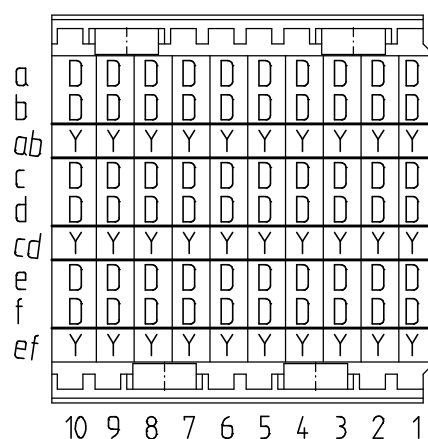

Lochbild für Leiterplatte *Board hole pattern*
 (Bestückungsseite) *(Component mounting side)*

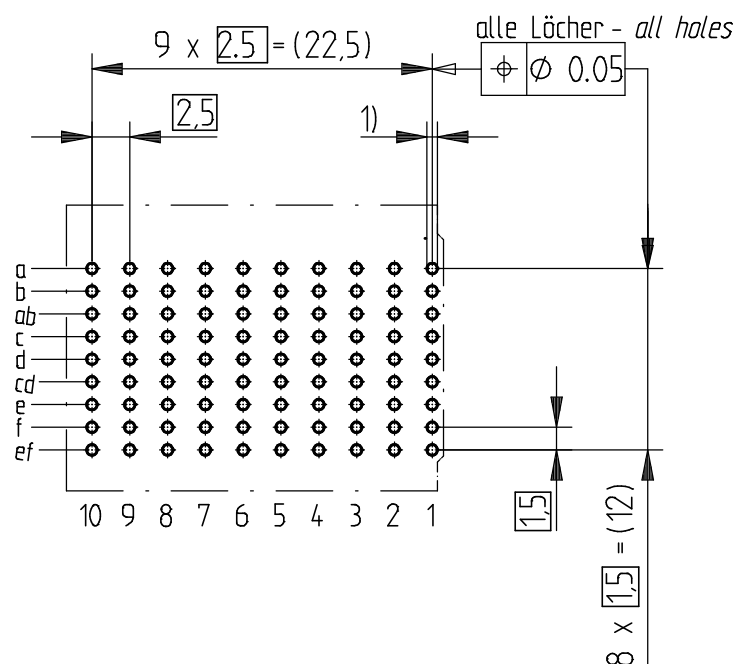

- 1) $\varnothing 0.6 \pm 0.05$ Durchmesser des metallisierten Loches
 $\varnothing 0.6 \pm 0.05$ *Diameter of finished plated-through hole*
- $\varnothing 0.7 \pm 0.02$ Bohrungsdurchmesser des Loches
 $\varnothing 0.7 \pm 0.02$ *Diameter of drilled hole*

Schichtaufbau im metallisierten Loch
 siehe Zeichnung 114406

Metal plating of plated-through hole
see drawing 114406

Information: D + Y siehe Bestückungsplan / see contact layout Anforderungsstufe 2 / class 2		Tolerances	 All Dimensions in mm	Scale	2:1
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation ERmetZD Messerleiste 3-10 ERmetZD Male Connector 3-10	
Consider protection memo from DIN 34 b Index		05.07.2011 Date	www.ERNI.com H:00070972.SZA	100800050001 ERMZD	K