
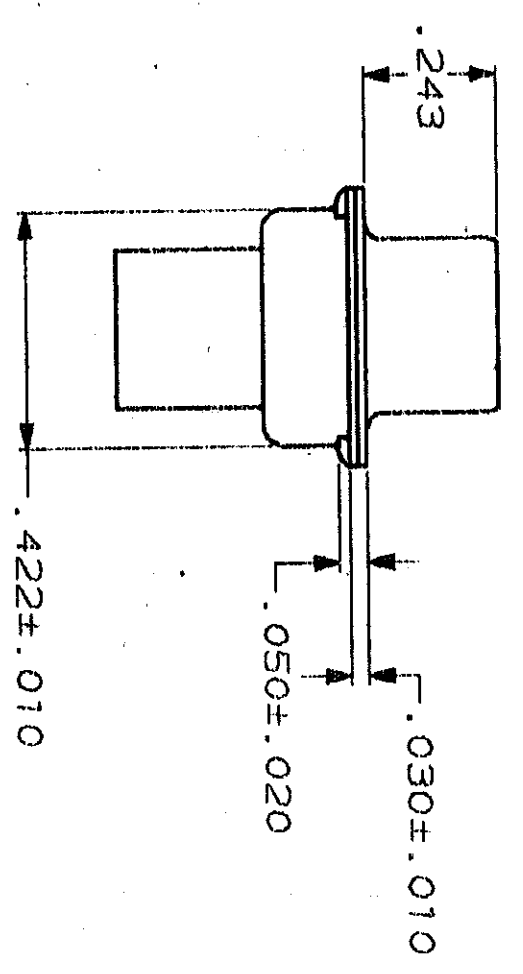
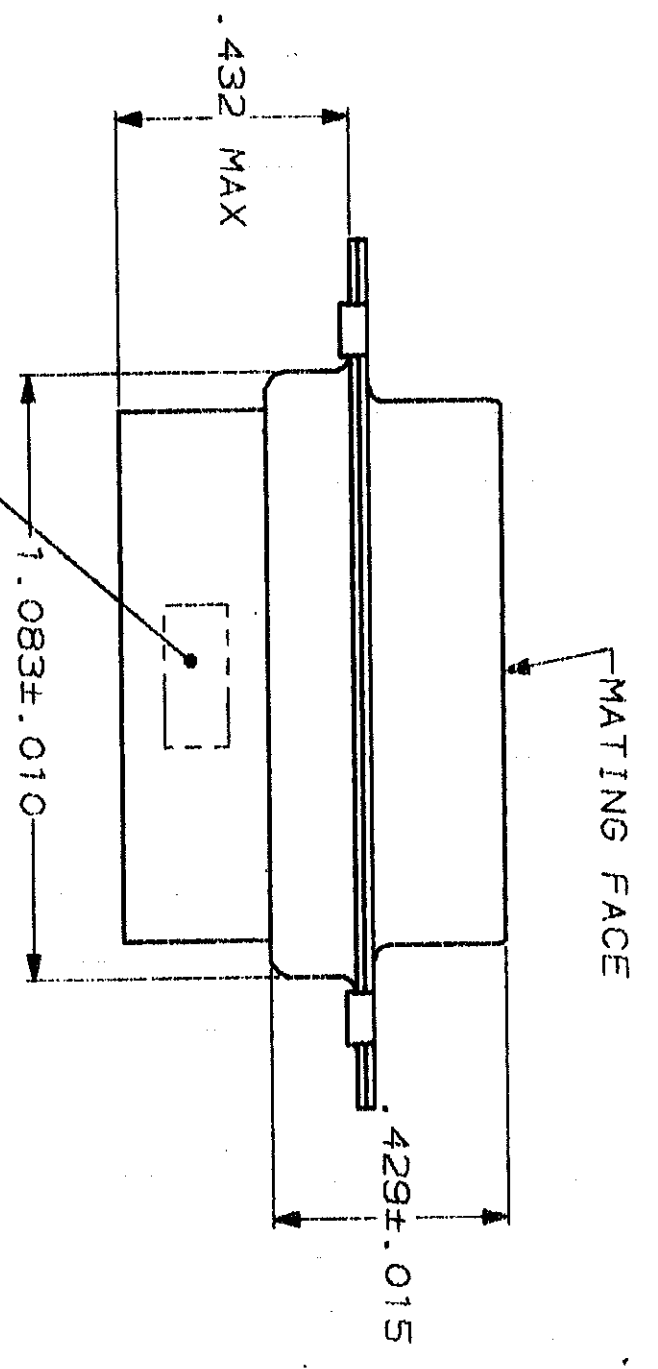


DRAWING MADE IN THIRD ANGLE PROJECTION
 THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.
 © COPYRIGHT 19 19

| LOC | DIST | ZONE | LTR | REVISIONS | DATE | APPD |
|-----|------|------|-----|--------------------|------|------|
| BD | 39 | | | REL WAS 87-4870-14 | | |

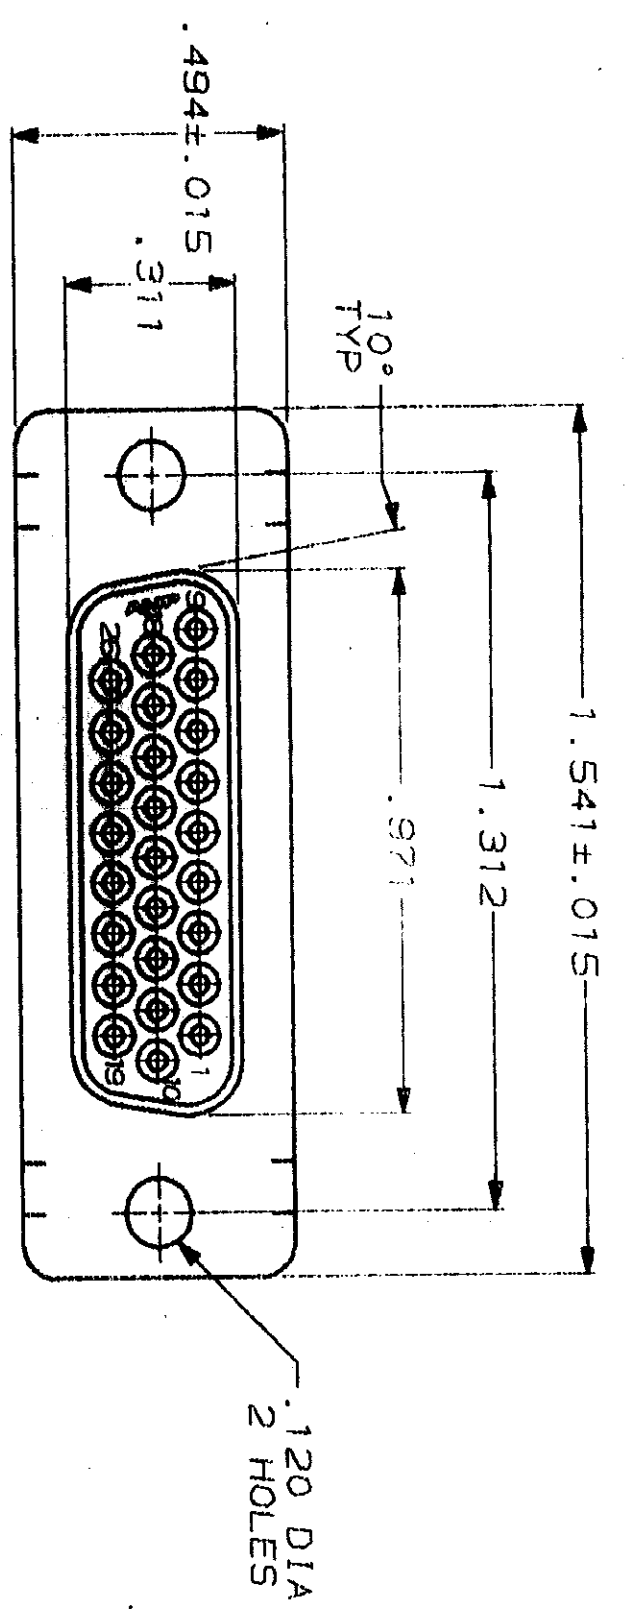

1. CONNECTOR ACCEPTS SIZE 22 DF SOCKET CONTACTS, RETENTION TINNES ARE AN INTEGRAL PART OF INSERT.
2. FLAME RETARDANT 94V-0 RATED GLASS FILLED NYLON, COLOR: BLACK.
3. STEEL PER ASTM A109.
4. TIN PLATED PER MIL-T-10727.

AMP, PART NO & DATE CODE, MARKED IN AREA INDICATED, ON FAR SIDE

DO NOT SCALE PRINT.
 UNLESS SPECIFIED
 DIMENSIONS IN INCHES
 TOLERANCES ON:
 1. ALL DIMS ± .005
 2. PLC DEC ± .005
 3. PLC DEC ± .005
 ANGLES ± 2°

DR: *J. P. ...* 1/12/88
 CHK: *H.G. ...* 1-14-88
 APPD: *J. ...* 1/14/88
 PRODUCT SPEC: *J. ...* 1/14/88

AMP INCORPORATED
 Morrisburg, Pa. 17068
 RECEPTACLE CONNECTOR, SIZE 2, 26 POSN,
 AMPLIMITED® HDP-22

748566-1
 PART NO

| | | | | |
|-------------------------|------------------|-------|---------|------------|
| FINISH SHELLS: Δ | APPLICATION SPEC | SIZE | FSCH NO | DRAWING NO |
| | | C | 00779 | 748566 |
| | WEIGHT | SCALE | | SHEET |
| | | 3:1 | | 1 OF 1 |