VITALCONN
a vital connector company

RoHS compliant

DATE: 2019/03/18 (REV:A6)

10/100 BASE-T MODULES
MODEL NO.: TH24020S1

FEATURE:


RoHS Compliant
RoHS peak solder rating 260℃/ 3~5 Sec
Designed to meet IR requirement
Operating Temperature.：-40℃ TO +85℃

SPECIFICATIONS: @ 25℃

OCL : 350 uH Min @100kHz ,100mv with 8mA DC Bias

Insertion Loss MHz (dB MAX)	Return Loss MHz (dB Min @100Ω)					Differential to Common Mode Rejection MHz (dB MIN)			Cross Talk MHz (dB MIN)		HI-POT (VAC)
1-100	1~30	40	50	60	80	1~30	60	100	0.3~60	60~100	1500
-1.15	-16	-14	-13.5	-13	-12	-40	-30	-25	-45	-35	

SCHEMATICS:

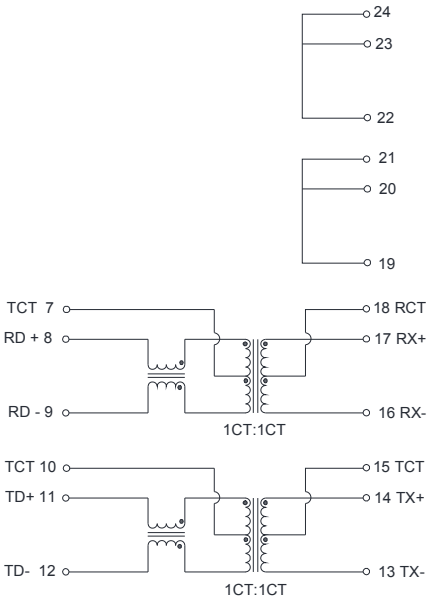

DIMENSION: mm；TOLERANCE: ±0.25

