
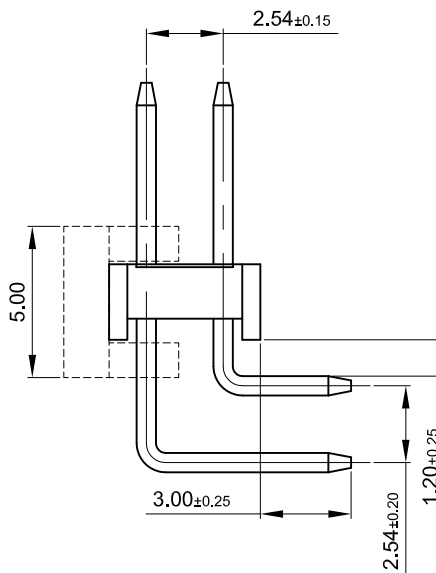
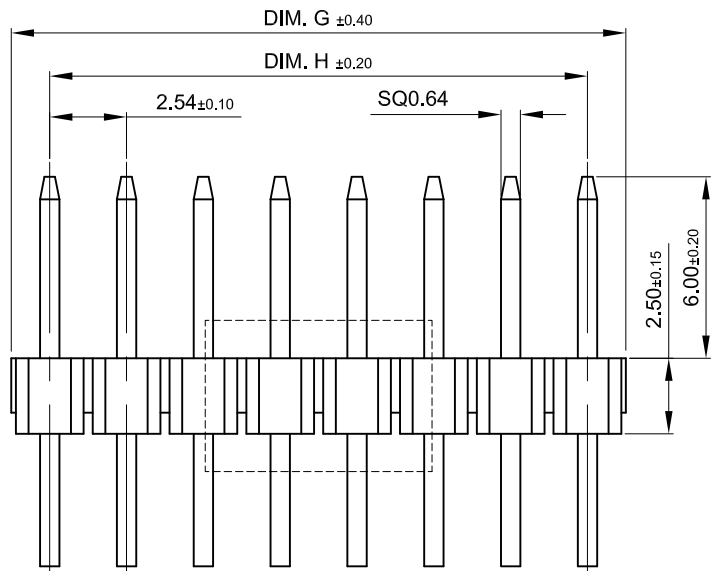


Tape & Reel packaging (with Pick and Place Cap) 300pcs per reel

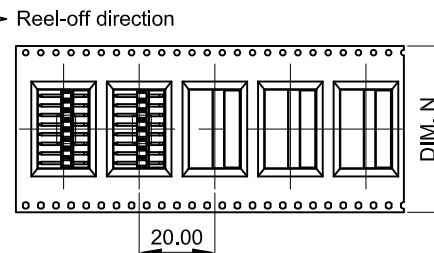

Notes:

Material and finish:


Contact: Brass
Gold over 30~80u" nickel plating
Insulation: PA9T UL94-V0, color black

Specifications:

Current rating: 3.0A
Contact resistance: 20mΩ Max.
Withstanding Voltage: 1000V AC/DC
Insulation resistance: 1000MΩ Min.
Operating temperature: -40°C to +105°C

Tube Packaging Q'ty

20	22
18	25
16	28
14	33
12	38
10	46
8	57
6	77
4	114
No. of positions	Q'ty per tube

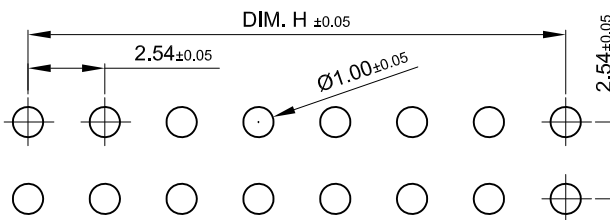

PCB Layout

129358	129349	129340	129331	20	25.40	22.86	44
129357	129348	129339	129330	18	22.86	20.32	44
129356	129347	129338	129329	16	20.32	17.78	44
129355	129346	129337	129328	14	17.78	15.24	44
129354	129345	129336	129327	12	15.24	12.70	32
129353	129344	129335	129326	10	12.70	10.16	32
129352	129343	129334	129325	8	10.16	7.62	24
129351	129342	129333	129324	6	7.62	5.08	24
129350	129341	129332	129323	4	5.08	2.54	24
Id-Nr. Tape&Reel	Id-Nr. Tube	Id-Nr. Tape&Reel	Id-Nr. Tube	No of Pos.	DIM. G	DIM. H	DIM. N
10u" gold plating	10u" gold plating	0.8u" gold plating	0.8u" gold plating				

Information:	Tolerances X ±0.50 X* ±10° X.X ±0.40 X.X* ±5° X.XX ±0.25 X.XX* ±3°	All Dimensions in mm	Scale 4:1
	For further information about I. D. number see manufacturing document		
All rights reserved. Only for Information. To insure that this is the latest version of this drawing, contact one of the ERNI companies before using	Subject to modification without prior notice. Drawing will not be updated.	Designation 2.54mm R/A Dual Row Header THR	
		129322	
A	13-08-2013		
Rev.	Date	129322.DWG	