




85 (W) x 40 (H) x 170 (L) mm

DPS-150AB-15

FEATURES

- Total Power 150W, Peak 16.5A/10s, 20A/1s
- 90-264Vac Auto Range Input
- Efficiency : meet DoE level VI
- High Reliability : >200,000 Hours @ Full Load (40°C)
- Protection : Short / Over-current / Over-voltage / Over-temperature
- Active PFC design, which can improve the performance on ripple noise and also be benefit for saving energy.
- Safety : CE, CB, UL&CUL, TUV, PSE, FCC, BSMI, KC&KCC, NRCAN, RCM, NOM, EAC, BIS
- EMI : CLASS B

Input	Voltage Range	90~264Vac Auto Range
	Frequency	47~63Hz
	Efficiency	The average efficiency at 25%, 50%, 75% and 100% load ≥ 88%
	Input Current	100Vac/12.5A load 2A 240Vac/12.5A load 2A
Output	12V	0A ~ 12.5A
Protection	Over-current	Latch off
	Over-temperature	Latch off
	Short	Auto Recovery
	Over-voltage	Latch off
Environment	Operating Temp.	0 to 40°C
	Storage Temp.	-20 to 80°C
	Operating Humidity	20% - 80%
	Storage Humidity	10% - 90%

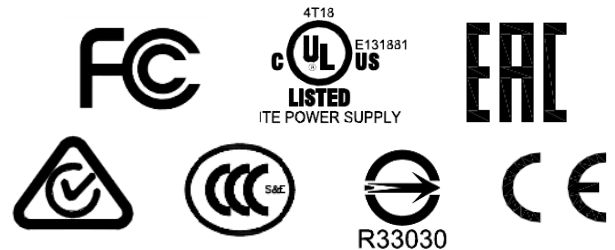

DELTA ELECTRONICS, INC.
3, TUNG YUAN ROAD, CHUNGLI INDUSTRIAL ZONE
TAOYUAN SHIEH, TAIWAN, R.O.C.
TEL: 886-3-4526107
FAX: 886-3-4527314
mail: powersales@delta.com.tw

DELTA PRODUCTS CORPORATION
4405 CUSHING PARKWAY
FREMONT, CA 94538, U.S.A.
TEL: 1-510-668-5100
FAX: 1-510-668-0680

DELTA ELECTRONICS(JAPAN) INC.
DELTA SHIBADAIMON BLDG.
2-1-14 SHIBADAIMON, MINATO-KU,
TOKYO, 105-0012, JAPAN
TEL: 81-3-5733-1111
FAX: 81-3-5733-1211

DELTA ELECTRONICS, EUROPE LTD.
2 YOUNG PLACE KELVIN
INDUSTRIAL ESTATE EAST KILBROIDE,
GLASGOW G75 0TD, U.K.
TEL: 44-1355-588888
FAX: 44-1355-588889

The de-rating curve of ambient temperature shown as Fig.1.

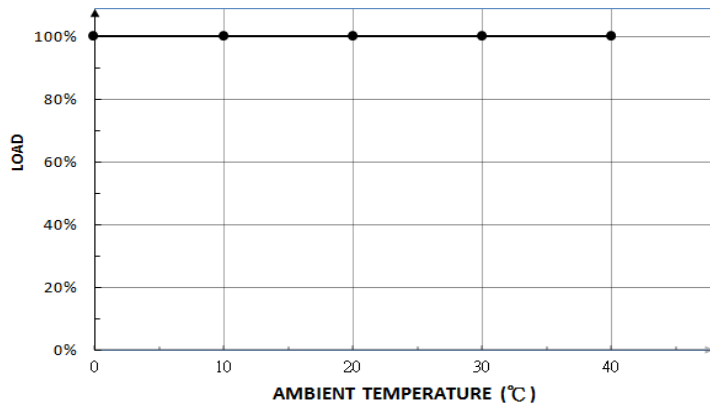


Figure1. Ambient temperature to power de-rating curve

Size : (L x W x H)	170*85*40 mm
AC Input Connector	C14
DC Output Connector	4 PIN DIN

