




PIN HEADERS

SINGLE ROW SMT STRAIGHT 1.27mm

- Industry compatible
- Competitively priced
- Various plated contacts available
- 1.27mm pitch
- Various pin lengths available

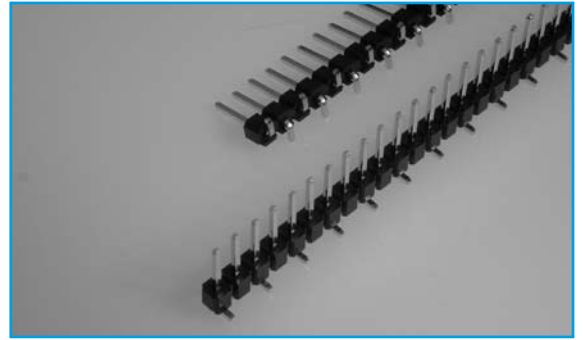


SECTION 8

SPECIFICATION




Material & Finish

Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max at 6V DC 0.3A
Insulator Resistance:	3000M Ω Min at 500V DC
Dielectric Withstanding	
Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

OUTLINE DRAWING

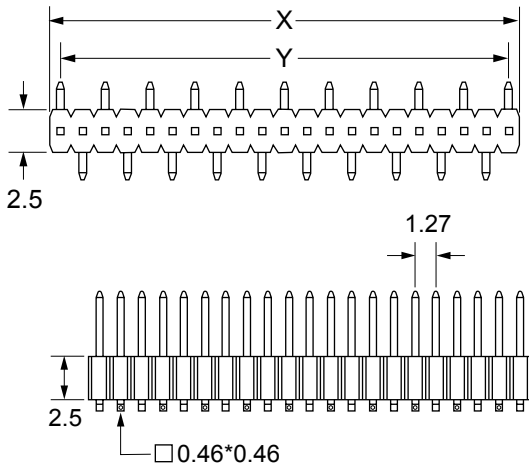

x	1.27 * Position No.
y	1.27 * (Position No.-1)



ORDERING INFORMATION

DBC	PH	C45	04	A	G	1	-XXX
Dubilier Connectors	Pin Header Connector	Series	N° of Ways 02=02way Thro to 40=40way	Contact Material A=Brass	Contact Plating G= Gold Flash S=Selective T=Tin Plated other plating Available	Colour 1=Black	Unique Special Code *See Below

*Dubilier will allocate a special code to distinguish pin lengths if required