
51 2,5 U


Direct connectors for insert cards, pitch 2.5/2.54/5.0/ 5.08 mm

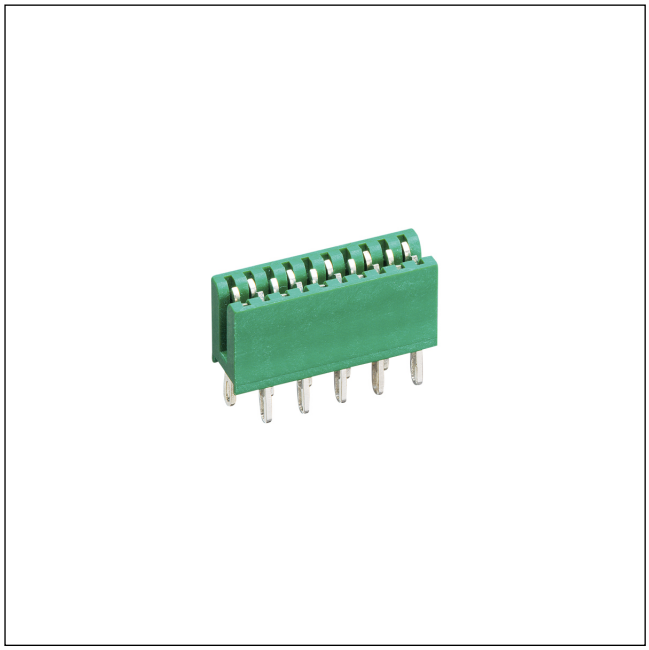



Socket board for direct mating, with solder eyes

State: Phasing out

51 2,5 U







Environmental conditions

Temperature range	-25 °C/+100 °C

Materials

Insulating body	PPO
Contact spring	CuSn, pre-nickel and tin-plated

Mechanical data

Mating with	Leiterplatte 1,5 ± 0,14 mm

Electrical data (at T_{amb} 20 °C)

Contact resistance	≤ 3 mΩ
Rated current	5 A
Rated voltage	250 V AC
Rated impulse voltage	≥ 1,5 kV

Associated products

Accessories

F FD FF
FL SP 3

51 2,5 U

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
2,5 U 03	3	200	2000
2,5 U 04	4	200	2000
2,5 U 05	5	200	2000
2,5 U 06	6	200	2000
2,5 U 07	7	200	2000
2,5 U 08	8	200	2000
2,5 U 09	9	200	2000
2,5 U 10	10	200	2000
2,5 U 11	11	200	2000
2,5 U 12	12	200	2000
2,5 U 13	13	200	2000
2,5 U 14	14	200	2000
2,5 U 15	15	200	2000
2,5 U 16	16	200	2000
2,5 U 17	17	200	2000
2,5 U 18	18	200	2000
2,5 U 19	19	200	2000
2,5 U 20	20	200	2000
2,5 U 21	21	200	2000
2,5 U 22	22	200	2000
2,5 U 23	23	200	2000
2,5 U 24	24	200	2000
2,5 U 25	25	200	2000
2,5 U 26	26	200	2000
2,5 U 27	27	200	2000
2,5 U 28	28	200	2000
2,5 U 29	29	200	2000
2,5 U 30	30	200	2000
2,5 U 31	31	200	2000
2,5 U 32	32	200	2000
2,5 U 33	33	200	2000
2,5 U 34	34	200	2000
2,5 U 35	35	200	2000
2,5 U 36	36	200	2000
2,5 U 37	37	200	2000
2,5 U 38	38	200	2000

51 2,5 U

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
2,5 U 39	39	200	2000
2,5 U 40	40	200	2000
2,5 U 41	41	200	2000
2,5 U 42	42	200	2000
2,5 U 43	43	200	2000
2,5 U 44	44	200	2000
2,5 U 45	45	200	2000
2,5 U 46	46	200	2000
2,5 U 47	47	200	2000
2,5 U 48	48	200	2000
2,5 U 49	49	200	2000
2,5 U 50	50	200	2000
2,5 U 51	51	200	2000
2,5 U 52	52	200	2000
2,5 U 53	53	200	2000
2,5 U 54	54	200	2000
2,5 U 55	55	200	2000
2,5 U 56	56	200	2000
2,5 U 57	57	200	2000
2,5 U 58	58	200	2000
2,5 U 59	59	200	2000
2,5 U 60	60	200	2000
2,5 U 61	61	200	2000
2,5 U 62	62	200	2000

Packaging:
in bulk, in a cardboard box