


Model:PU3917BW

Characteristics:

- PCB mounting,low mounting height,Mounting types of
- PU39BW and PU39B are a little different in dimension
- Input:double 110V/double 115V(or producing as customerized).

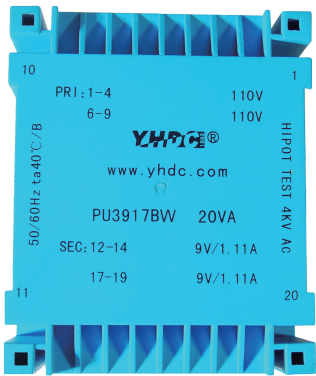

Technical Index:


- Mounting type: PCB
- Flame resistance : UL94-V0
- Isulation class: B
- Operation temperature: -30℃~+40℃
- Work frequency: 50Hz~60Hz
- Dielectric strength: 4KV 50Hz 1min

Technical Parameters table:

Primary voltage	110×2/115×2	V
Pirmary voltage range	±10	%
Voltage regulation	≤21	%
Power	24	VA
Temperature rising	≤29	℃
No load loss	≤1.4	W
weight	455	g

Secondary voltage	Secondary no load voltage	Secondary full load current
6V×2	7.8V×2	2A×2
7.5V×2	9.7V×2	1.6A×2
9V×2	11.4V×2	1.33A×2
12V×2	14.9V×2	1A×2
15V×2	18.5V×2	0.8A×2
18V×2	22V×2	0.666A×2
24V×2	28.5V×2	0.5A×2

Schematic Diagram:

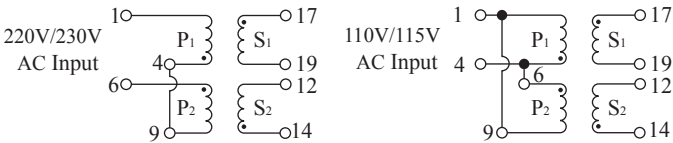

Dimension（in mm）:

