OptoSupply
Light It Up

Deluxe Power 5mm Round Ultra Bright Red LED

OS5RKA5B61P


▪Features

- High Luminous LEDs
- 5mm Round Standard Directivity
- Superior Weather-resistance
- UV Resistant Epoxy
- Water Clear Type

▪Applications

- Traffic Signal
- Backlighting
- Signal and channel letter
- Other Lighting

▪Outline Dimension

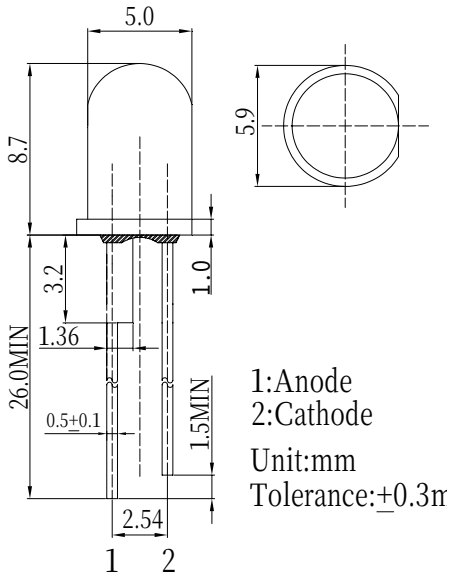


▪Absolute Maximum Rating (Ta=25℃)

Item	Symbol	Value	Unit
DC Forward Current	I_F	70	mA
Pulse Forward Current*	I_{FP}	120	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	130	mW
Operating Temperature	Topr	-40~ +85	℃
Storage Temperature	Tstg	-40 ~ +100	℃
Lead Soldering Temperature	Tsol	260℃/5sec	-

*Pulse width Max.10ms , Duty ratio max 1/10

▪Directivity

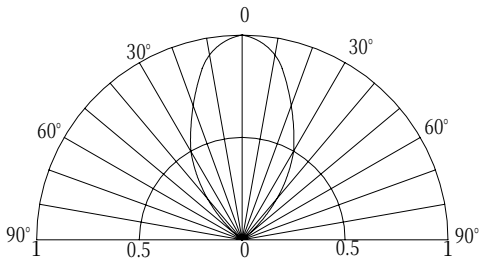


▪Electrical -Optical Characteristics (Ta=25℃)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V_F	I_F=60mA	2.0	2.2	2.6	V
DC Reverse Current	I_R	V_R=5V	-	-	10	μA
Domi. Wavelength*	λ_D	I_F=60mA	619	624	629	nm
Luminous Intensity*	Iv	I_F=60mA	40000	48000	-	mcd
50% Power Angle	$2\theta_{1/2}$	I_F=60mA	-	60	-	deg

*1 Tolerance of dominant wavelength is ±1nm

*2 Tolerance of luminous intensity is ±15%

■Maximum Forward DC Current

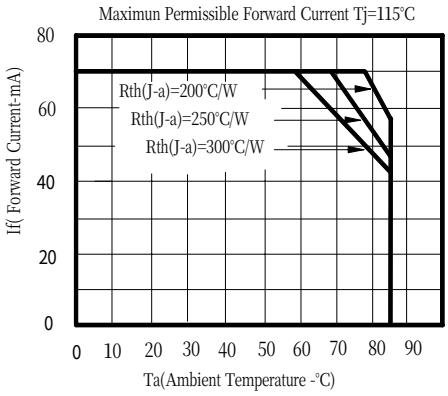

LED & Application Technologies