



PARAMETER		UNITS
TURNS RATIO 1:1:1:1 ±1% Pins 1-10 : 2-9 : 4-7 : 5-6		
¹ Inductance ±10%	3.025	mH
² Leakage Inductance	10 max.	μH
DCR Pins 1 - 10	1.9 max.	Ω
DCR Pins 2 - 9	1.9 max.	Ω
DCR Pins 4 - 7	1.9 max.	Ω
DCR Pins 5 - 6	1.9 max.	Ω
Isolation (Any winding to any winding)	1000	V _{RMS}

HDSL Line Interface Transformer

Schematic Diagram

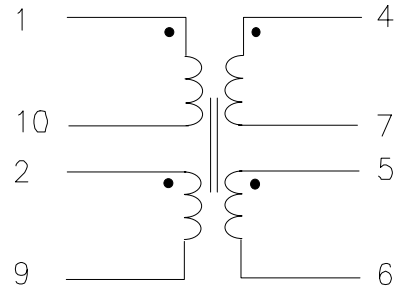


- 1) Tested @ 1 kHz and 1 V (Pins 1-9 short 2-10)
 2) Tested @ 10 kHz 100 mA AC (Pins 1-9 short 2-10 & 4-5-6-7)
 Tested on a Wayne Kerr 3245

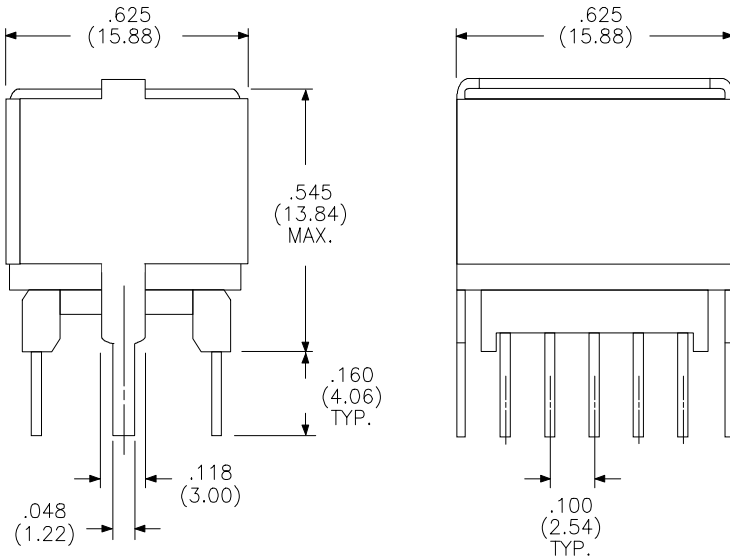


Pin Diameter is 0.025 (0.64)

PIN POSITION GRID 0.100 (2.54)

- HOLES FOR BOBBIN PINS
- HOLES FOR CLIPS

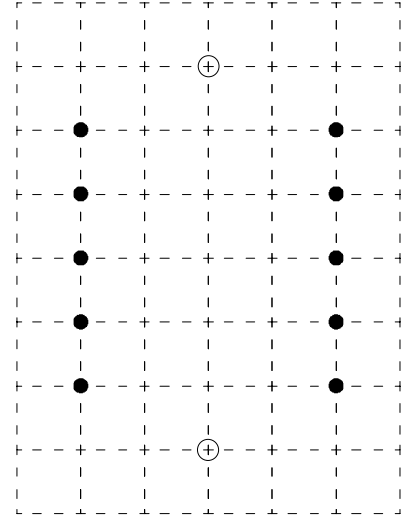

Physical Dimensions
inches (mm)

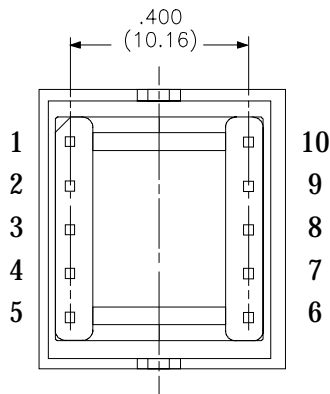

Rhombus P/N: **T-911**

Cust. P/N:

Name:

Date: **2/28/96**

Sheet: 1 of 1