


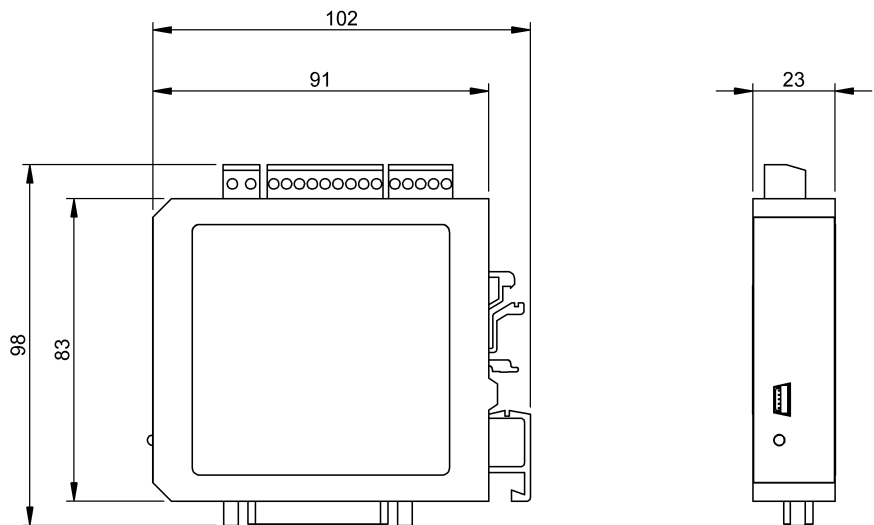

Basic features

Approval/Conformity	CE UKCA WEEE
Use	for BTL magnetostrictive linear position sensor

Electrical connection

Connection	USB Mini
------------	----------

Electrical data

Current consumption without load, max.	30 mA
Input frequency max.	5 kHz
Operating voltage U_b	18...30 VDC

Environmental conditions

Ambient temperature	-20...60 °C
IP rating	IP20
Storage temperature	-25...75 °C

Functional safety

MTTF (40 °C)	101.5 a
--------------	---------

Interface

Interface	Start/Stop parallel
-----------	---------------------

Material

Housing material	Plastic
------------------	---------

Mechanical data

Dimension	23 x 98 x 102 mm
Mounting part	DIN rail 35 mm

Wiring Diagrams

