


DASH NO. M CODE MADE FROM

GSD

KN-99-34

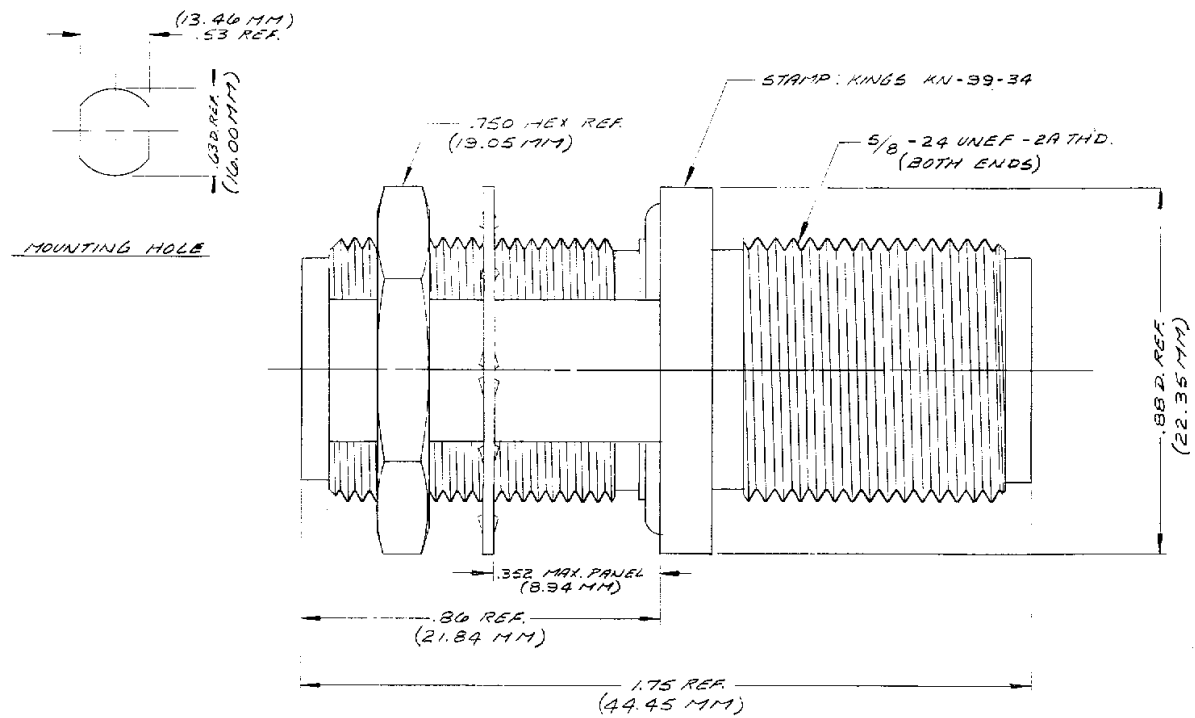

NOTES:

1. MATERIAL:
 CENTER CONTACT — BER. COPPER, QQ-C-530.
 INSULATORS — TEFLON, L-P-403.
 LOCKWASHER — PHOSPHOR BRONZE, QQ-B-750.
 O-RING — NITRILE RUBBER, PER MIL-P-5315.
 ALL OTHER METAL PARTS — BRASS, QQ-B-626.

2. FINISHES:
 ALL METAL PARTS — SILVER PLT, PER. QQ-5-365.

3. ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE — 50 Ω.
 FREQUENCY RANGE — DC TO 110 MHz.
 WORKING VOLTAGE — 100 VOLTS R.M.S.

UNLESS OTHERWISE SPECIFIED:

- | | |
|--|--|
| 1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010 | 2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX. |
| 3 PLACE DECIMALS ± .004 | 3. NO FILLETS PERMITTED. |
| ANGLES ± 0°30' | 4. SURFACE ROUGHNESS 63 MICRONS RMS MAX. |
| T. I. H. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES. | 5. ALL DIMENSIONS PRIOR TO PLATING. |
| | 6. ALL PLATING IN ACCORDANCE WITH KER 10004. |

REVISIONS	
ISSUE	CHANGES
2	CN 26189 C CT 4 JUN 84
GSD	
SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF	
N BULKHEAD ADAPTER F-F	
DRAWN CT	DATE 28 MAR 85
APPR MJB	DATE 7 APR 85
APPR	DATE
 ELECTRONICS CO. INC. TUCKAHOE NEW YORK 10981	
KN-99-34	

GSD