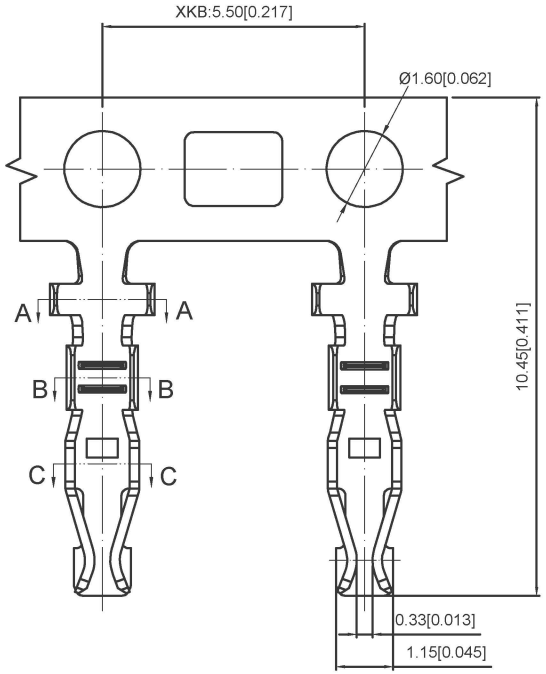

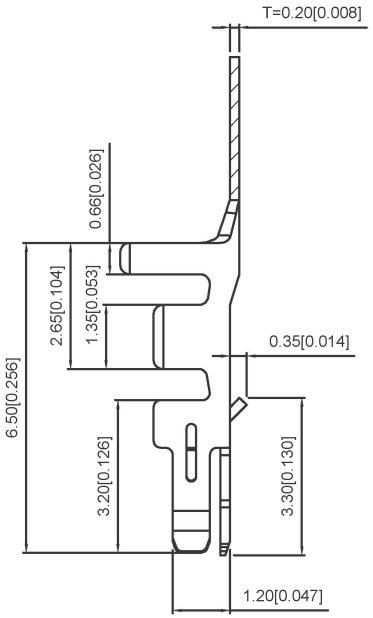

Specifications:
规格：
Voltage rating:250V AC/DC
额定电压：250V AC/DC
Current rating:3A AC/DC
额定电流：3A AC/DC
Withstanding voltage:800V AC/minute
耐受电压：800V AC/分钟
Temperature range:-25℃-+85℃
温度范围：-25℃-+85℃
Insulation resistance:≥1000MΩ
绝缘电阻：≥1000MΩ
Contact resistance:≤10mΩ
接触电阻：≤10mΩ
After environmental testing:≤20mΩ
环境测试后：≤20兆欧

X2026 T X - P XXX X - L
① ②③ ④ ⑤ ⑥ ⑦

1.Series Number
2.Category:T-terminal
3.Shape:Blank-ordinary
4.Material:P-Phosphor bronze
5.Plating style:SN-Bright tin plating;V01-Gold Flash
G03-Gold 3u"Plated Contact
6.Plating method:Blank-Stamping before plating
B-plating before stamping
7.Mold N0./Mark/Special N0:L-Loose

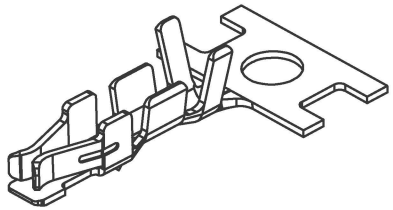



SECTION:A-A
SCALE:1:1



SECTION:B-B
SCALE:1:1



SECTION:C-C
SCALE:1:1

X2026T-PG03-L	Phosphor Bronze	AWG#22-28	1.50mm(Max)	Stamping Before Pating:30u"MIN Ni;Contact Area Gold:3u"MIN	X2026H.2026H-A
X2026T-PV01-L				Stamplng Before Patlng:30u"MIN.NI;Whole Gold Flash	
X2026T-PSNB-L				Plating Before Stamplng:10u"NI;40~60 u"Sn	
X2026T-PSN-L				Stamping Before Plating:30u"MIN Ni;70u"MIN Sn	
PART NO	Material	Wire Range	Insulation OD		Suitable XKB Terminal

广东星坤科技股份有限公司
生效日期
文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

units:	mm
tolerance:	
X.X	±0.2mm
X.XX	±0.1mm
X.XXX	±0.05mm

UNSPECIFIED TOLERANCES

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

DSND		DATE		SCALE: N/A	MODEL TYPE: Wire to board connector
DWN		DATE		VIEW:	PART NO.: 2.00mm Crimp Style Connectors
CHKD		DATE		UNIT: mm/in	DWG NO.: X2026T-PXXXX-L
APPD		DATE		SIZE: A4	

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0