Pushing Performance

Han-Brid RJ45C-M-RJ industrial 10G

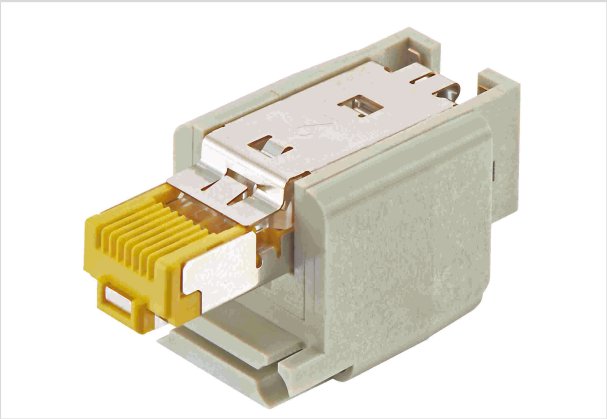


Image is for illustration purposes only. Please refer to product description.

Part number	09 12 003 3015
Specification	Han-Brid RJ45C-M-RJ industrial 10G
HARTING eCatalogue	https://b2b.harting.com/09120033015

Identification

Category	Inserts
Series	Han-Brid®
Identification	Han-Brid® RJ45 C
Specification	hybrid network connector

Version

Gender	Male
Size	3 A
With wire protection	0
Number of contacts	2
further contacts	+ RJ45
Details	With RJ Industrial

Technical characteristics

Rated current	10 A
Rated voltage	24 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$>10^{10}$ Ω
Limiting temperature	[-40] ... [+125 °C]
Mating cycles	≥500

HARTING Electric GmbH & Co. KG | Wilhelm-Harting-Straße 1 | 32339 Espelkamp | Germany
Phone +49 5772 47-97100 | electric@HARTING.com | www.HARTING.com

Pushing Performance

Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	No

Specifications and approvals

Specifications	IEC 61984
Approvals	DNV GL
UL / CSA	UL 1977 ECBT2.E235076 CSA-C22.2 No. 182.3 ECBT8.E235076
CE	0

Commercial data

Packaging size	10
Net weight	43.4 g
Country of origin	Romania
European customs tariff number	85366990
eCl@ss	27440205 Contact insert for industrial connectors

HARTING Electric GmbH & Co. KG | Wilhelm-Harting-Straße 1 | 32339 Espelkamp | Germany
Phone +49 5772 47-97100 | electric@HARTING.com | www.HARTING.com