

SHEET 1 OF 1

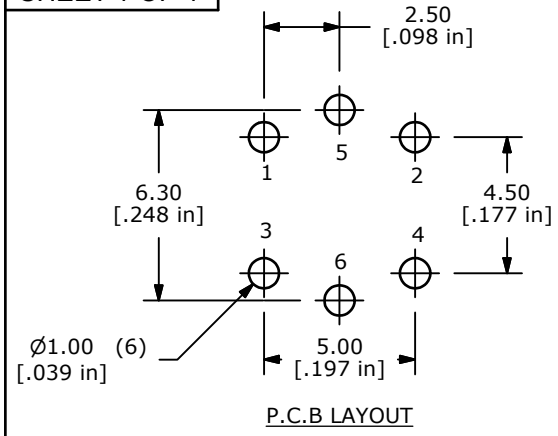



P.C.B LAYOUT



CIRCUIT: SPST
MOMENTARY

LED SPECS	UNITS	BLUE
FORWARD CURRENT	mA	20 TYP.
FORWARD VOLTAGE	V	2.9 TYP. - 4.0 MAX. (E)
LUMINOUS INTENSITY	MCD	150 TYP.

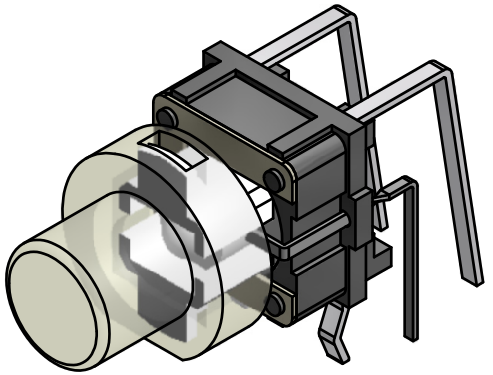

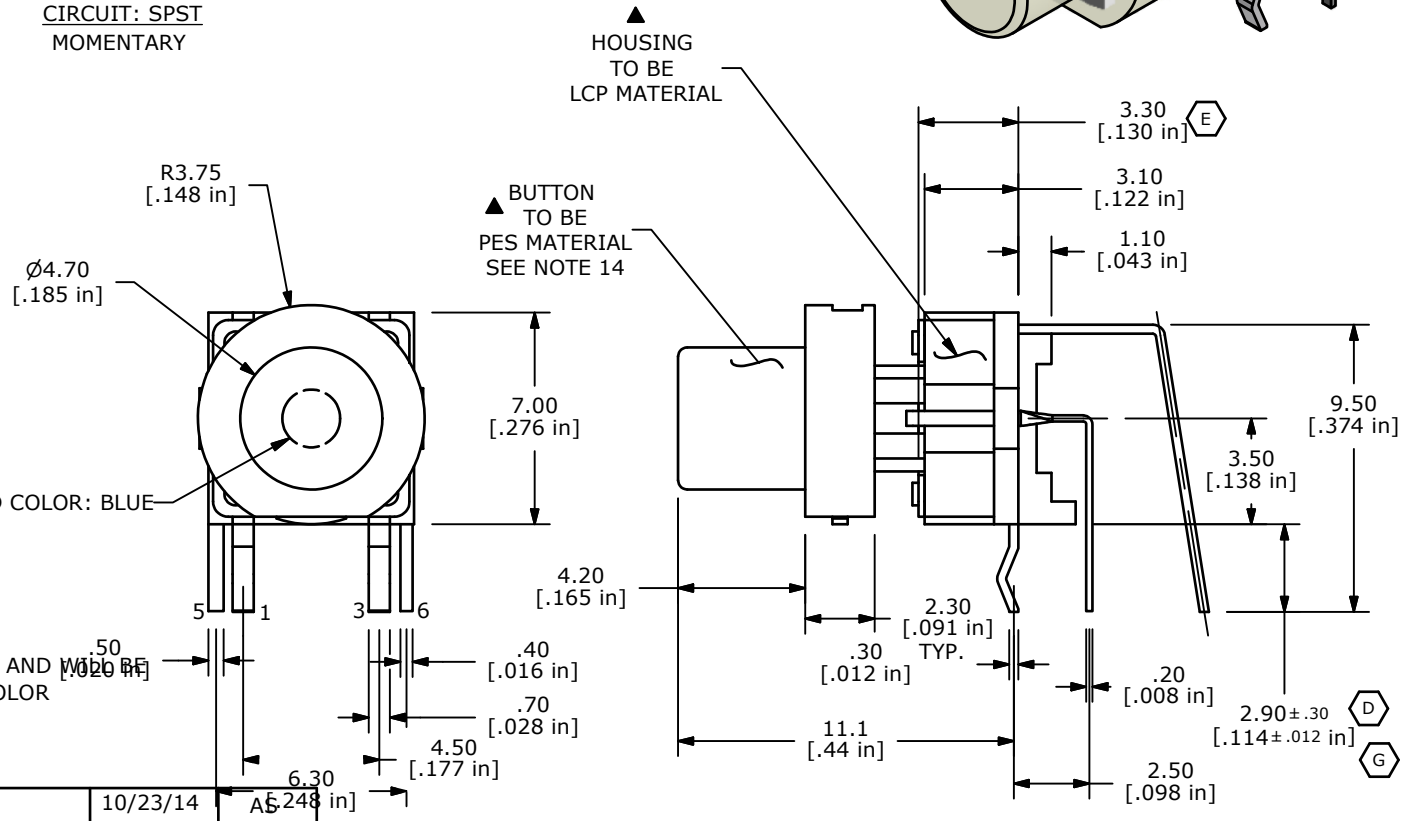

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100mΩ MAX.
5. INSULATION RESISTANCE: 100MΩ MIN.
▲6. OPERATING FORCE: 160± 50gf
7. TRAVEL: 0.2± 0.1mm
8. OPERATING TEMPURATURE: -20˚C TO 70˚C LED COLOR: BLUE
9. OPERATING LIFE 500,000 CYCLES
▲10. LED COLOR: BLUE
11. ▲DENOTES CRITICAL PARAMETER (E)
12. 2002/95/EC (ROHS) COMPLIANT
▲13. PACKAGE: 100 PIECES PER TRAY (H)
▲14. BUTTON COLOR: BUTTON TO BE TRANSPARENT AND WILL BE WATER CLEAR TO A POSSIBLE YELLOW TINT COLOR
15. PACKAGING: 100 PIECES PER TRAY (I)

REV	PCR NO	DESCRIPTION	DATE	BY
I	21659	ADDED NOTE 15	10/23/14	AS
H	21655	UPDATED NOTES	10/22/14	AS
G	20959	2.90±.30 WAS 3.10±.10	1/9/13	EBP
F	20821	BUTTON COLOR	10/12/12	EBP
E	19956	CORRECT NOTES / LED CHART	05/19/11	BMA
D	19668	DIMENSION CHANGED was 3.65	2/8/11	BGL
C	19361	NEW RELEASE	11/04/10	BMA

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

TITLE TL1260BQSCLR

SCALE	DATE	DR	DWG	REV
4:1	10/15/2010	BLR	B200017	I