



Darstellung mit Bedruckung
Representation with printing

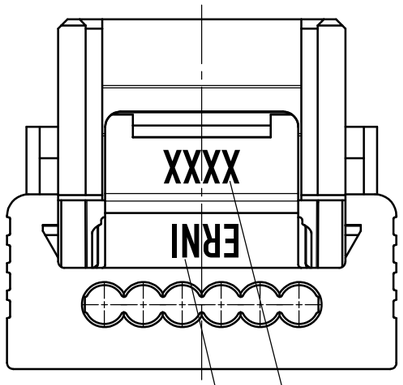


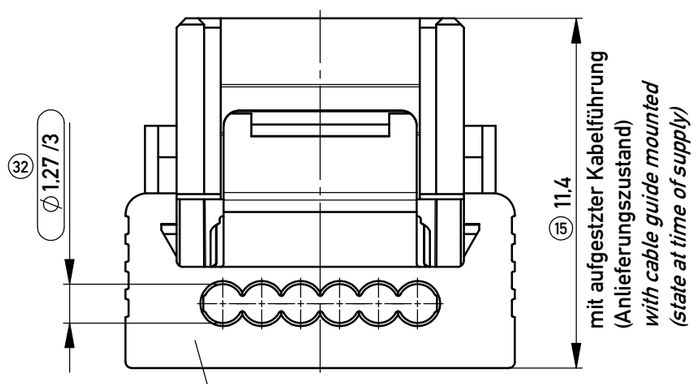


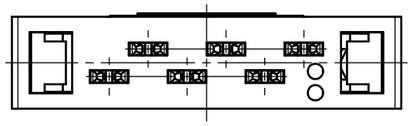


Funktionsrelevantes Prüfmerkmal
siehe Verarbeitungsspezifikation
MiniBridge ERNI Electronics GmbH

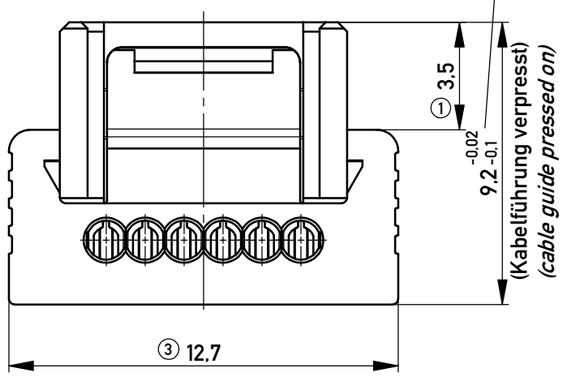



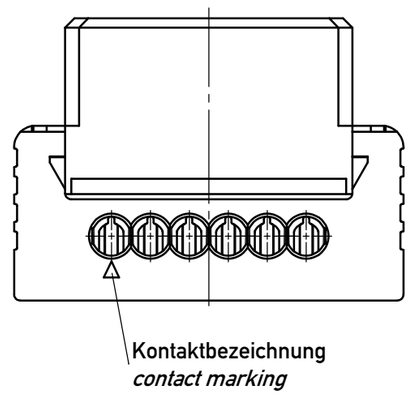

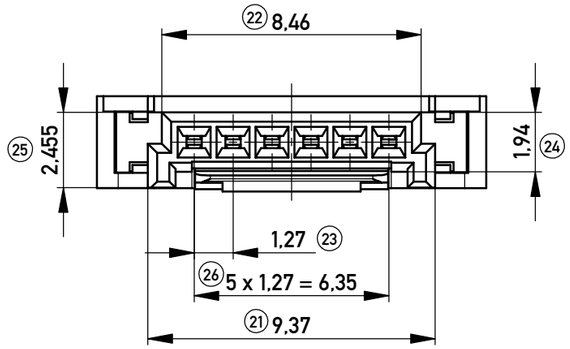


SPC-Maß: Prüfmaße der Kategorie /1
/1 Für SPC-Maße muss eine x/s Regelkarte geführt werden mit Nachweis der Prozessfähigkeit in der Serie (Cpk) oder 100% - Prüfung


Prüfmaß: Prüfmaße der Kategorie /2 und /3
/2 Für Prüfmaße muss eine x/s Regelkarte geführt werden

/3 Prüfmaße werden serienbegleitend attributiv (i.O. / n.i.O.) geprüft

Verpackt in Tray - *tray packaging*
Verpackungseinheit 144 Stück - *packaging unit 144 pcs*

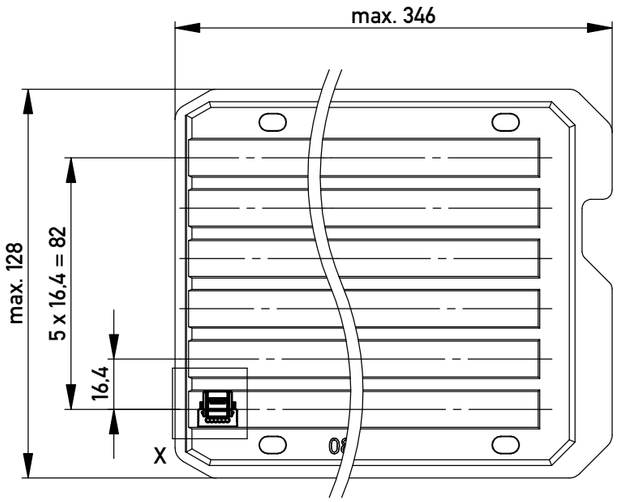

Einzelheit X - *detail X*
M 2:1



* Federkontakt AWG 22 - *Female Contact AWG 22*
Kabelführung Ø1,27 - *cable guide Ø1,27*

nur mit Hilfsmittel lösbar, für Einzeladern, für die Anforderung nach PG 9 der LV214 (Koshiri-Sicherheit)

only with tool unlockable, for single conductors, for the requirement of the LV214 PG 9 (Koshiri-security)

Dimension Nr. 1 - 32 unbelegte Nr.: 2, 4-8, 10-14, 16-20, 27-31	Tolerances ISO 2768-fH	All Dimensions in mm	Scale 5:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation F 1,27 SRC P SKV, 6-polig KS *F 1,27 SRC P SKV, 6-pin KS*	
Index	Date	ERNI www.ERNI.com	100303590001 K A3
			Class SRCP

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.